

Light efficiency:

132 Lumen/Watt

Light quality:

CRI: 82,4

Color temperature:

4000 K

Output: 4295 lm

Peak: 1431 cd

Power: 32,5 W

PF: 0,96



Tracking number: [VT240927-001589](#)

Product name:

272637-4000K

Item number:


272637-4000K

Date and time:

27-9-2024 13:01:48

Description:

**SIDE-LIT LED PANEEL | PANDIA |
120X30CM | 34W**

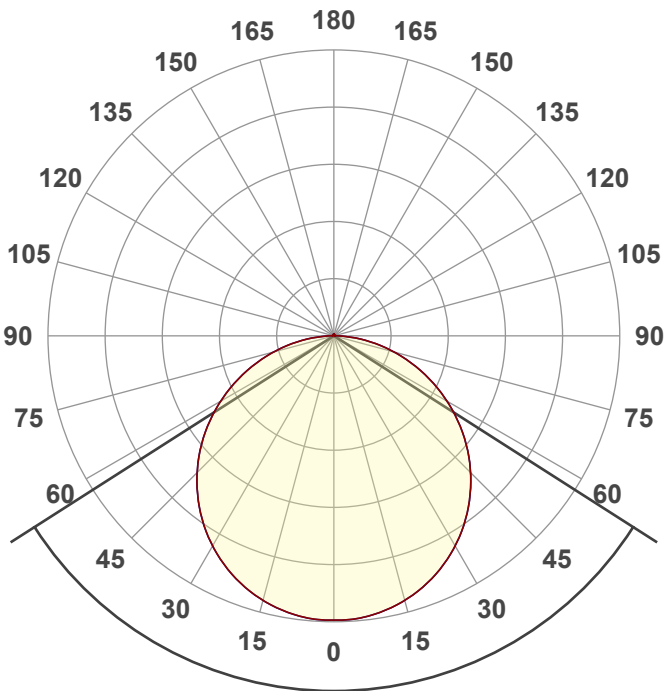


Beam angle

114,9°




CIE 1931
x: 0,381
y: 0,377



Spectra

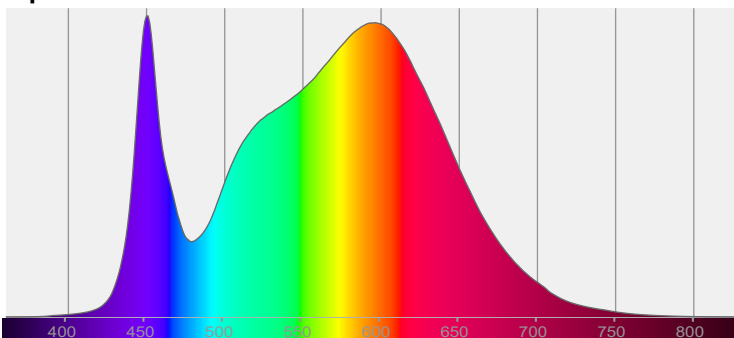


Power

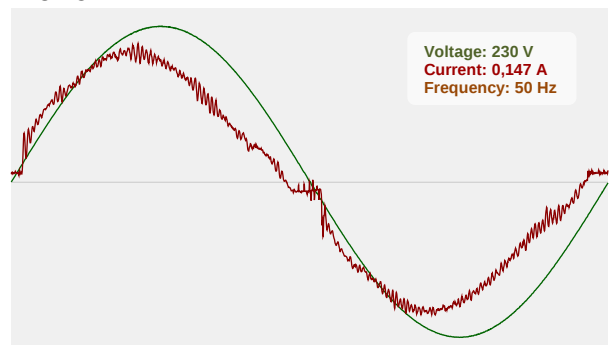


Voltage: 230 V
Current: 0,147 A
Frequency: 50 Hz

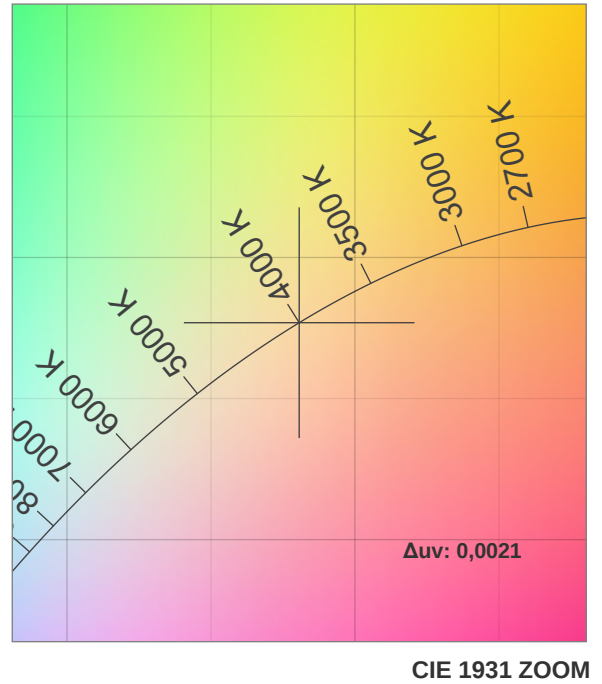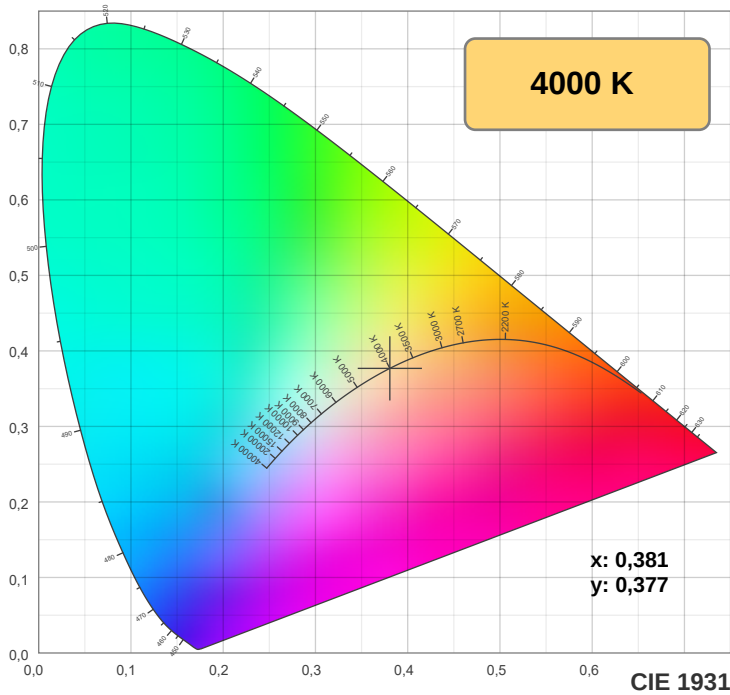

TM-30: 84,0

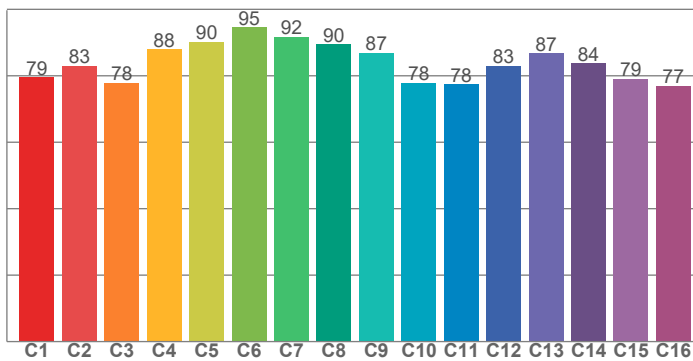

CRI: 82,4 (R1-R8)

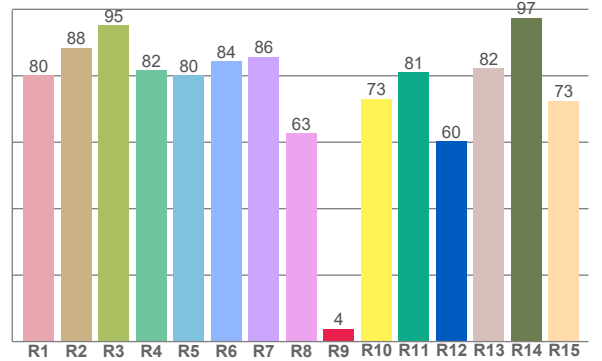

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
80,3	88,5	95,2	81,7	80,3	84,4	85,7	62,7	3,9	73,1	81,0	60,3	82,3	97,5	72,5


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
79,5	83,0	77,9	88,1	90,2	94,5	91,7	89,5	86,9	77,8	77,5	83,0	86,7	83,8	79,2	77,0

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
80,2	98,1	79,5	76,8	81,5	83,1	84,7	88,5	97,6	89,0	85,9	84,2	83,2	70,4	74,0

CQS: 82,2

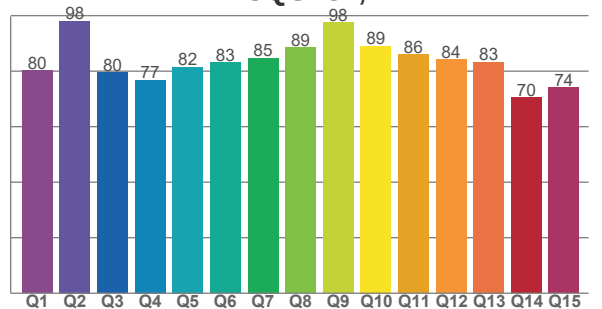

Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
4000 K	82,4	3,9	84,0	95,3	82,2	0,381	0,377	0,225	0,334	0,0021







Rf 84,0


Fidelity index Rf

Rg 95,3

Gamut index Rg

Hue Bin	R _f	Shifts (%)	
		Chroma	Hue
1	79	-12%	-1%
2	83	-8%	6%
3	78	-4%	11%
4	88	0%	7%
5	90	1%	4%
6	95	2%	-2%
7	92	-4%	-3%
8	90	-6%	-1%
9	87	-7%	6%
10	78	-7%	12%
11	78	2%	15%
12	83	7%	6%
13	87	5%	-6%
14	84	11%	-12%
15	79	-1%	-15%
16	77	-6%	-13%

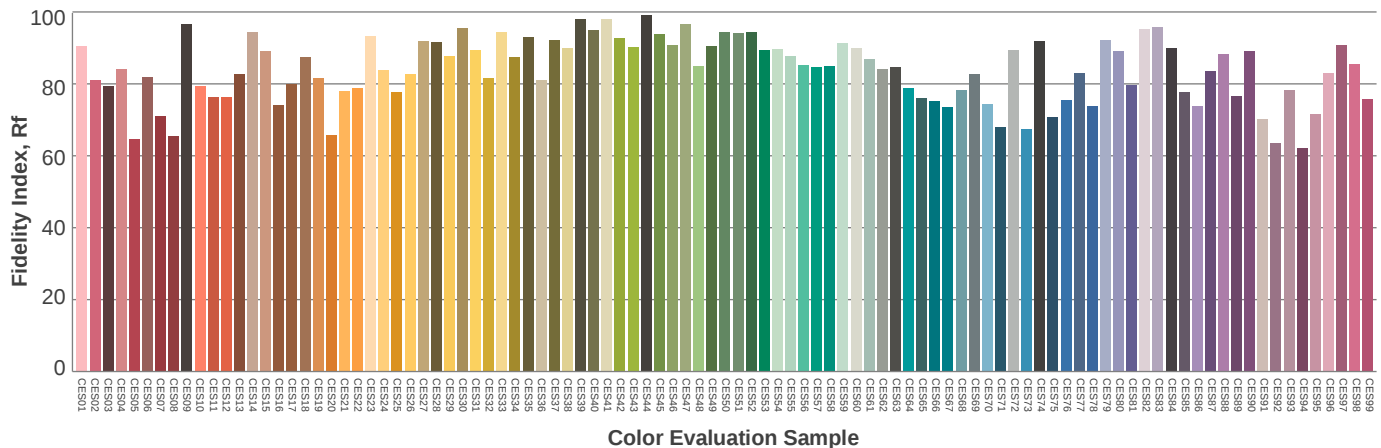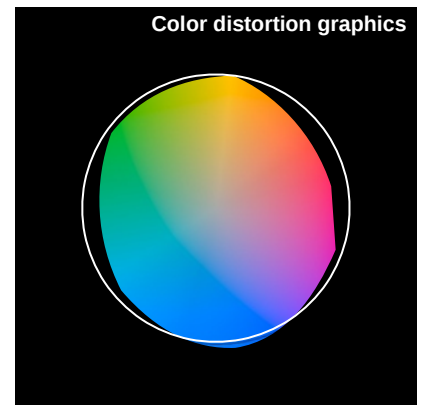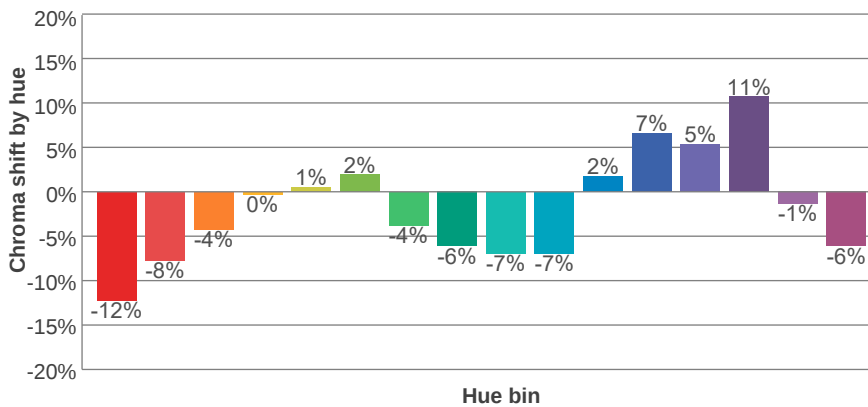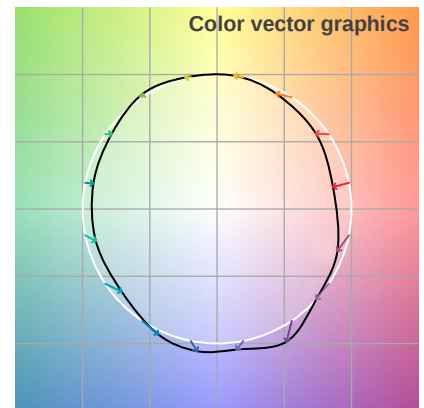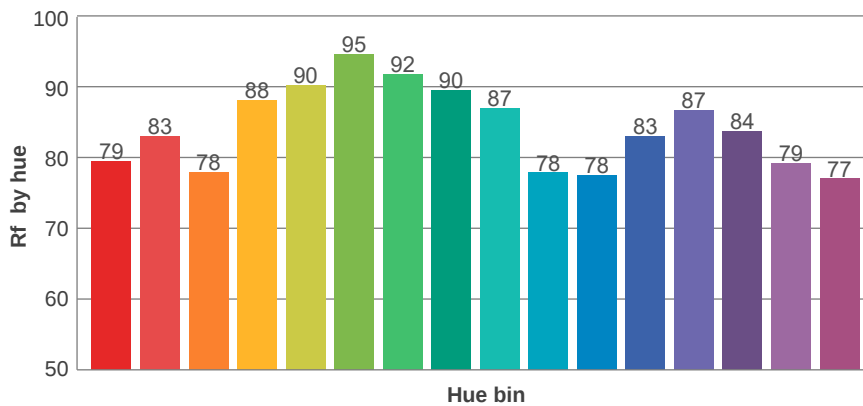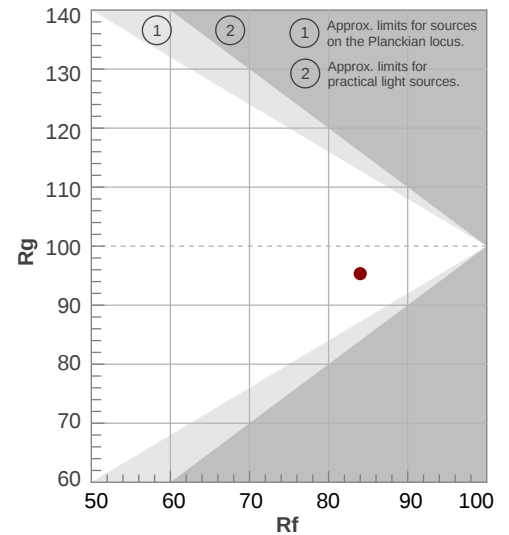

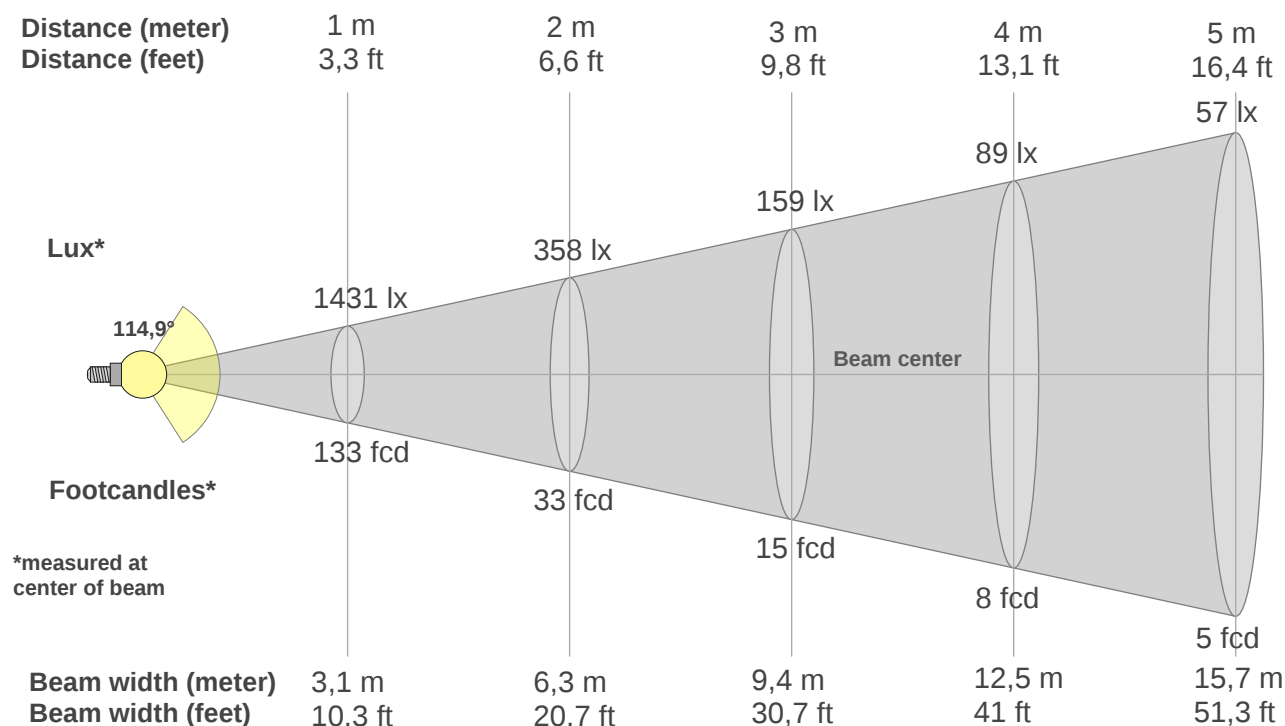
Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	19,7ft	23ft	26,2ft	29,5ft	32,8ft	36,1ft	39,4ft	42,7ft	45,9ft	49,2ft	52,5ft	55,8ft	59,1ft	62,3ft	65,6ft
1431lx	358lx	159lx	89lx	57lx	40lx	29lx	22lx	18lx	14lx	12lx	10lx	8lx	7lx	6lx	6lx	5lx	4lx	4lx	4lx
132,9fc	33,2fcd	14,8fcd	8,3fcd	5,3fcd	3,7fcd	2,7fcd	2,1fcd	1,6fcd	1,3fcd	1,1fcd	0,9fcd	0,8fcd	0,7fcd	0,6fcd	0,5fcd	0,5fcd	0,4fcd	0,4fcd	0,3fcd

Intensities in 0° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
1431	1426	1408	1378	1336	1284	1220	1147	1064	973	874	769	658	544	429	314	203	101	28	5
100%	100%	98%	96%	93%	90%	85%	80%	74%	68%	61%	54%	46%	38%	30%	22%	14%	7%	2%	0%

Intensities in 90° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
1431	1426	1408	1378	1336	1284	1220	1147	1064	973	874	769	658	544	429	314	203	101	28	5
100%	100%	98%	96%	93%	90%	85%	80%	74%	68%	61%	54%	46%	38%	30%	22%	14%	7%	2%	0%


Intensities in 180° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
1431	1426	1408	1378	1336	1284	1220	1147	1064	973	874	769	658	544	429	314	203	101	28	5
100%	100%	98%	96%	93%	90%	85%	80%	74%	68%	61%	54%	46%	38%	30%	22%	14%	7%	2%	0%

Intensities in 270° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
1431	1426	1408	1378	1336	1284	1220	1147	1064	973	874	769	658	544	429	314	203	101	28	5
100%	100%	98%	96%	93%	90%	85%	80%	74%	68%	61%	54%	46%	38%	30%	22%	14%	7%	2%	0%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
114,9°	165,6°	177,8°	76,2%	51,5%

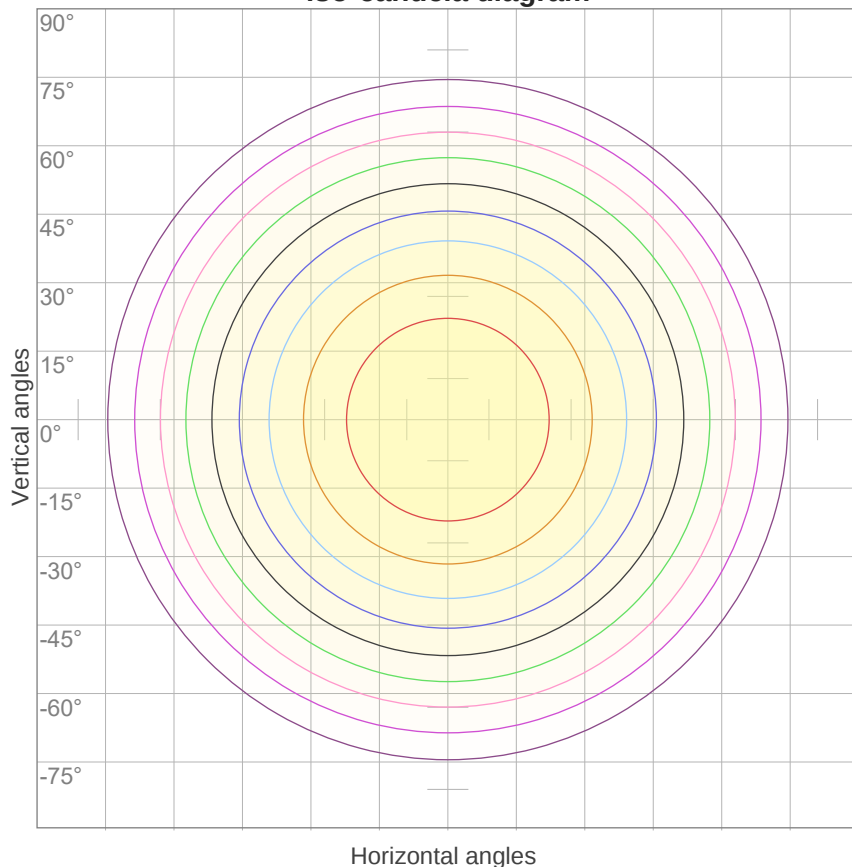
iso-candela diagram


10%	143 cd
20%	286 cd
30%	429 cd
40%	572 cd
50%	716 cd
60%	859 cd
70%	1002 cd
80%	1145 cd
90%	1288 cd

Conditions:

Number of c-planes: 12

Candela at center: 1431 cd

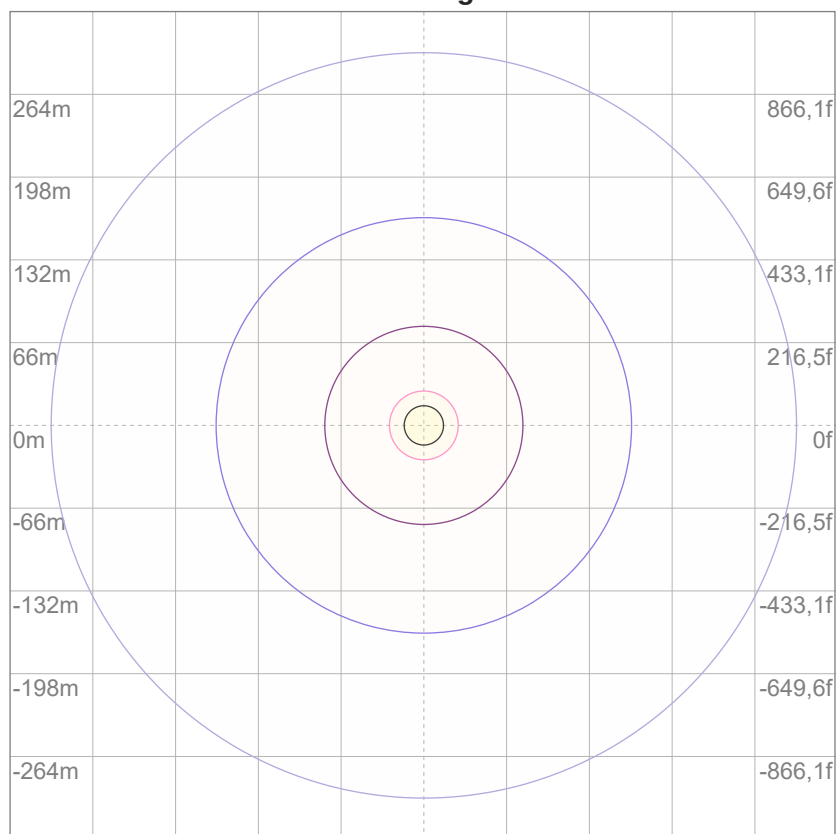iso-lux diagram


3%	0,429 lx
5%	0,716 lx
10%	1,43 lx
30%	4,29 lx
50%	7,16 lx

Conditions:

Number of c-planes: 12

Lux at center: 14,3 lx

*Lux distribution on a surface
when lamp is mounted at 10
meters from the surface.*

Glare evaluation according to UGR


p Ceiling		70	70	50	50	30	70	70	50	50	30
p Walls		50	30	50	30	30	50	30	50	30	30
p Floor		20	20	20	20	20	20	20	20	20	20
Room size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	17,8	19,0	18,1	19,4	19,6	17,9	19,1	18,2	19,5	19,7
	3H	19,3	20,6	19,8	20,9	21,1	19,5	20,8	19,9	21,1	21,3
	4H	20,0	21,2	20,4	21,5	21,8	20,2	21,4	20,6	21,7	22,0
	6H	20,6	21,7	20,9	22,0	22,4	20,8	21,9	21,2	22,2	22,6
	8H	20,8	21,8	21,1	22,2	22,6	21,0	22,1	21,4	22,4	22,8
	12H	20,9	21,9	21,3	22,3	22,7	21,2	22,2	21,6	22,5	23,0
4H	2H	18,4	19,7	18,9	20,0	20,2	18,5	19,7	18,9	20,0	20,3
	3H	20,3	21,3	20,7	21,7	22,1	20,4	21,4	20,8	21,8	22,2
	4H	21,0	22,0	21,5	22,4	23,0	21,2	22,1	21,6	22,5	23,1
	6H	21,7	22,6	22,2	22,9	23,3	21,9	22,8	22,4	23,1	23,5
	8H	21,9	22,7	22,4	23,1	23,5	22,1	23,0	22,7	23,3	23,7
	12H	22,1	22,8	22,6	23,2	23,7	22,3	23,0	22,8	23,5	24,0
8H	4H	21,4	22,2	21,9	22,6	23,0	21,5	22,3	22,0	22,7	23,1
	6H	22,2	22,8	22,7	23,3	23,9	22,4	23,0	22,9	23,5	24,0
	8H	22,5	23,1	23,1	23,6	24,3	22,7	23,3	23,3	23,8	24,5
	12H	22,8	23,2	23,4	23,8	24,4	23,0	23,5	23,6	24,0	24,6
12H	4H	21,4	22,1	21,9	22,5	23,0	21,5	22,2	22,0	22,6	23,1
	6H	22,3	22,8	22,8	23,4	24,0	22,5	23,0	23,0	23,5	24,2
	8H	22,7	23,1	23,2	23,6	24,3	22,9	23,3	23,4	23,8	24,5
Variation of the observer position for the luminaire distance S											
S = 1.0H		0,1 / -0,1					0,1 / -0,1				
S = 1.5H		0,1 / -0,2					0,1 / -0,2				
S = 2.0H		0,3 / -0,4					0,3 / -0,4				
CIE 117-1995. Corrected glare indices referring to 4295 lm total luminous flux											

Coefficients of Utilization

Ceiling reflectance	80				70				50			30			10			0
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio) Room Values are expressed as percentage of Lumens delivered to the task surface																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	101	101	101	99
1	108	103	99	95	105	101	97	93	96	93	90	92	89	87	88	86	84	82
2	98	89	82	76	95	87	81	75	84	78	74	80	76	72	77	73	70	68
3	89	78	70	63	87	77	69	63	73	67	61	71	65	60	68	63	59	57
4	81	69	60	53	79	68	59	53	65	58	52	63	56	51	60	55	50	48
5	75	62	53	46	73	61	52	45	58	51	45	56	50	44	54	48	44	42
6	69	55	46	40	67	54	46	40	53	45	39	51	44	39	49	43	38	36
7	64	50	41	35	62	49	41	35	48	40	35	46	39	34	45	39	34	32
8	60	46	37	31	58	45	37	31	44	36	31	42	36	31	41	35	30	28
9	56	42	34	28	54	41	33	28	40	33	28	39	32	28	38	32	27	26
10	52	39	31	25	51	38	31	25	37	30	25	36	30	25	35	29	25	23

LAMPS (number of lamps)

Luminaire budgetary diagram

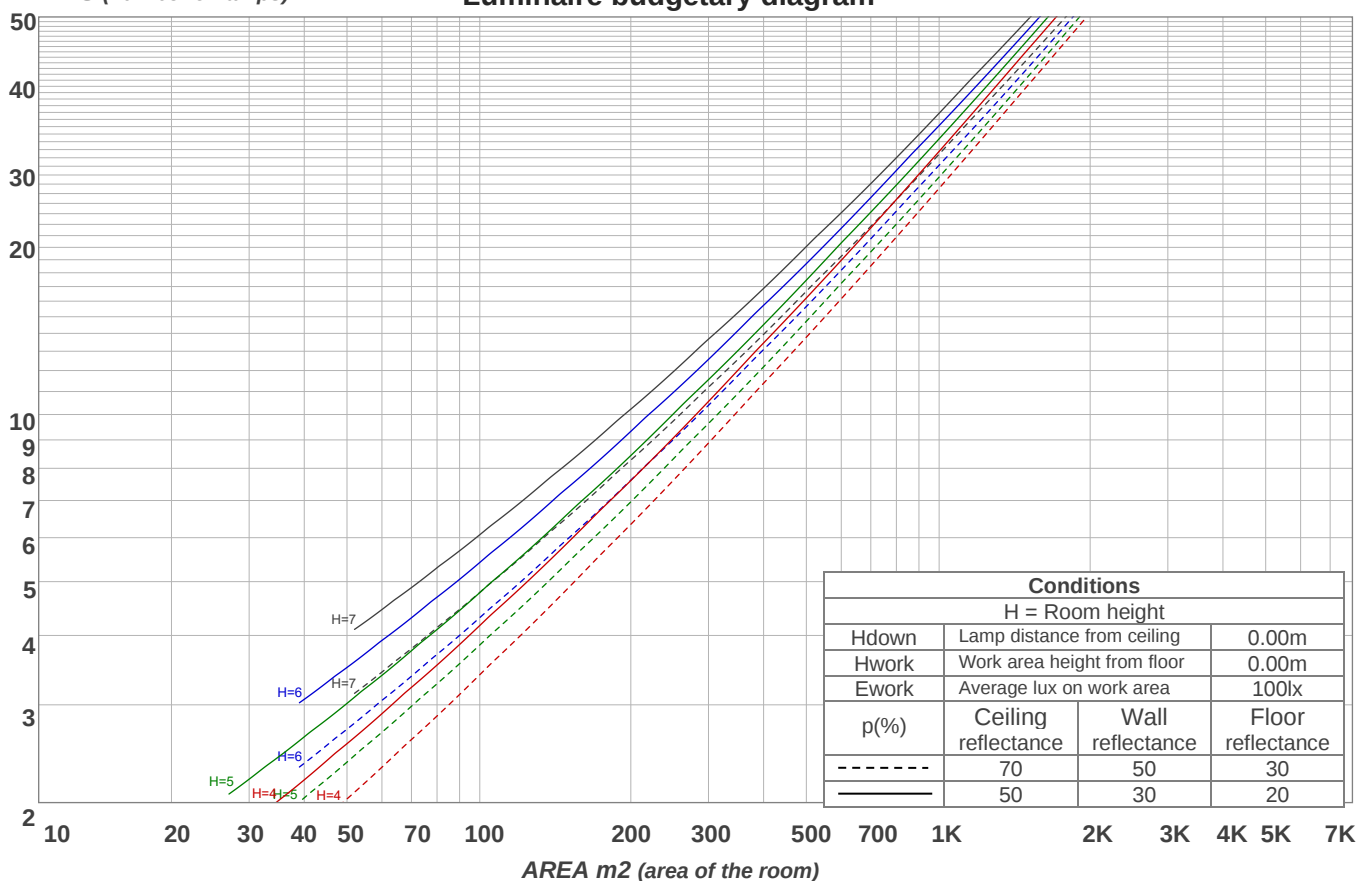


Zonal Lumen Summary


0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
{LUM0-10}	389 lm	592 lm	718 lm	751 lm	688 lm	538 lm	331 lm	110 lm
90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
8,15 lm	5,53 lm	5,65 lm	5,59 lm	5,17 lm	4,46 lm	3,51 lm	2,19 lm	0,741 lm

LCS table

BUG rating:	B2 U2 G1	
Forward light	Lumens	Lumens %
Low(0-30):	558	13%
Medium(30-60):	1077,2	25,1%
High(60-80):	434,7	10,1%
Very high(80-90):	56,6	1,3%
Back light		
Low(0-30):	558	13%
Medium(30-60):	1077,2	25,1%
High(60-80):	434,7	10,1%
Very high(80-90):	56,6	1,3%
Uplight		
Low(90-100):	9,5	0,2%
High(100-180):	32,8	0,8%

LCS graph

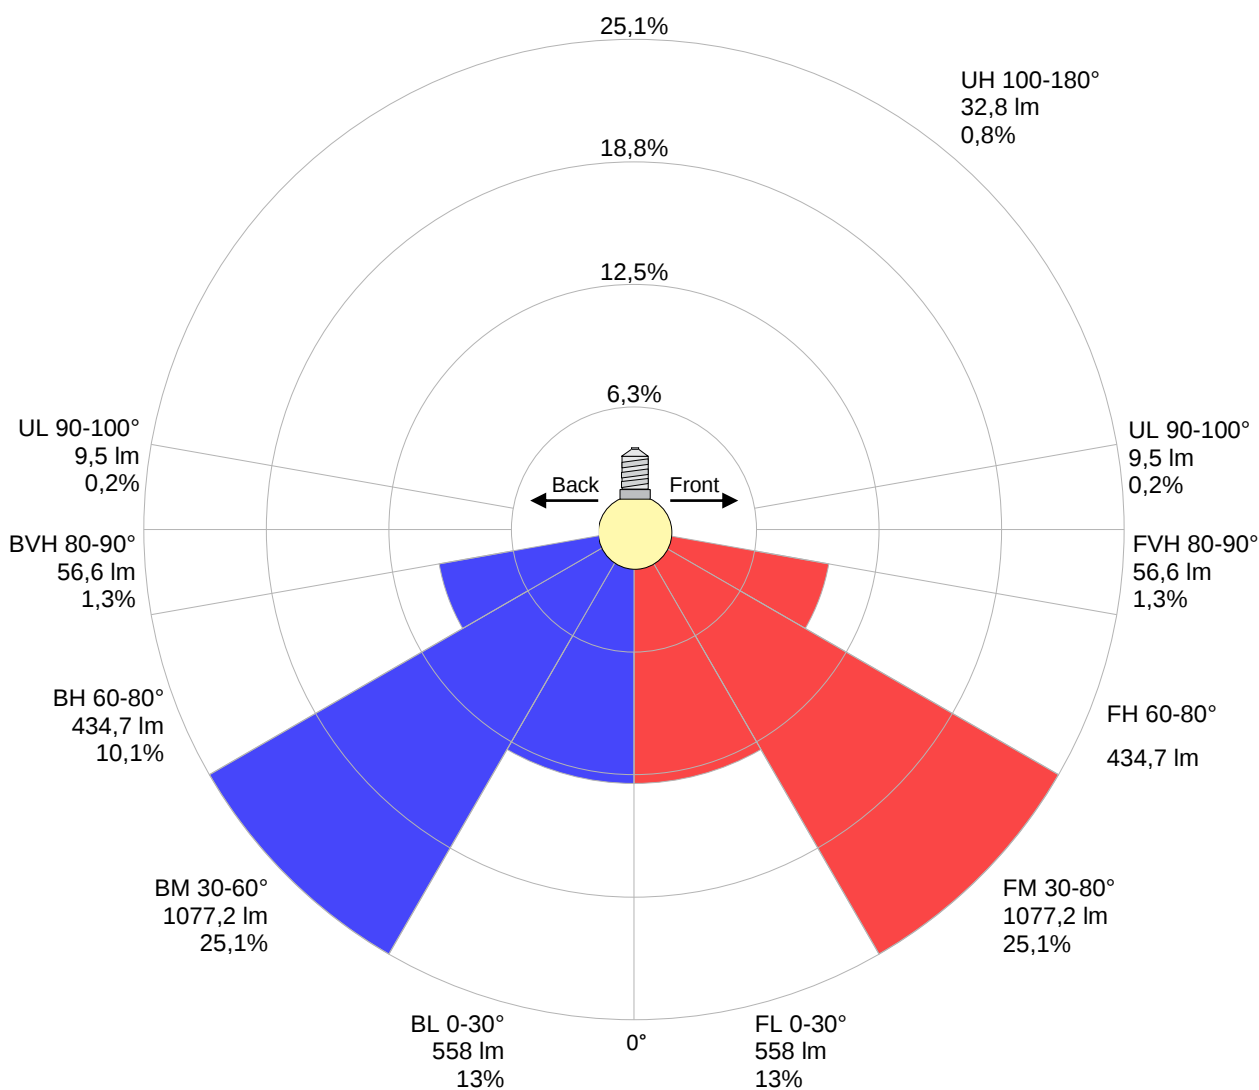

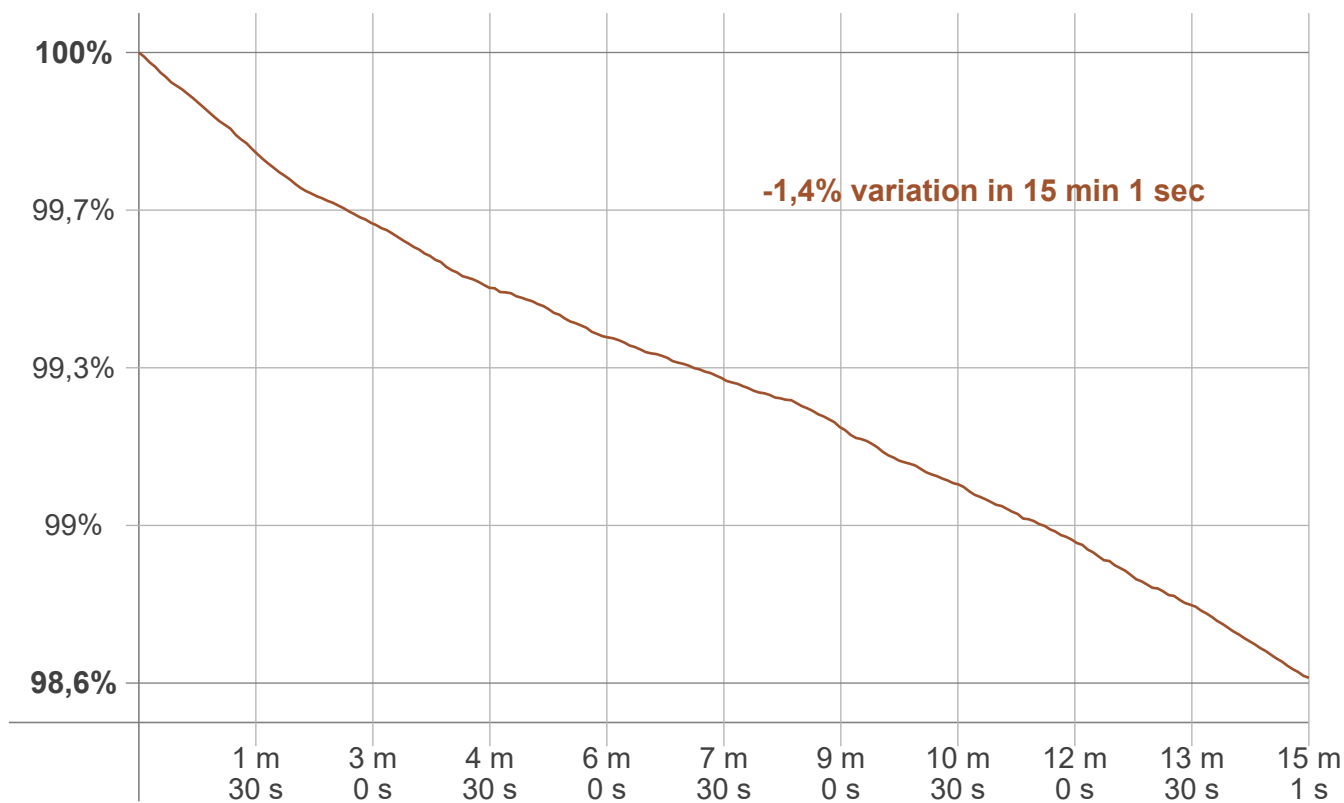Warmup curve

Warmup result

Warmup time:	Lamp stabilized in 15 min 1 sec
Warmup variation	-1,4%

Warmup conditions




Stable period:	15 min
Stable change max:	2,0%
Minimum time:	15 min

Color temperature change

CCT start	CCT change	CCT end
3990 K	+10 K	4000 K

Output change

Output start	Output change	Output end
4353 lm	-58 lm	4295 lm

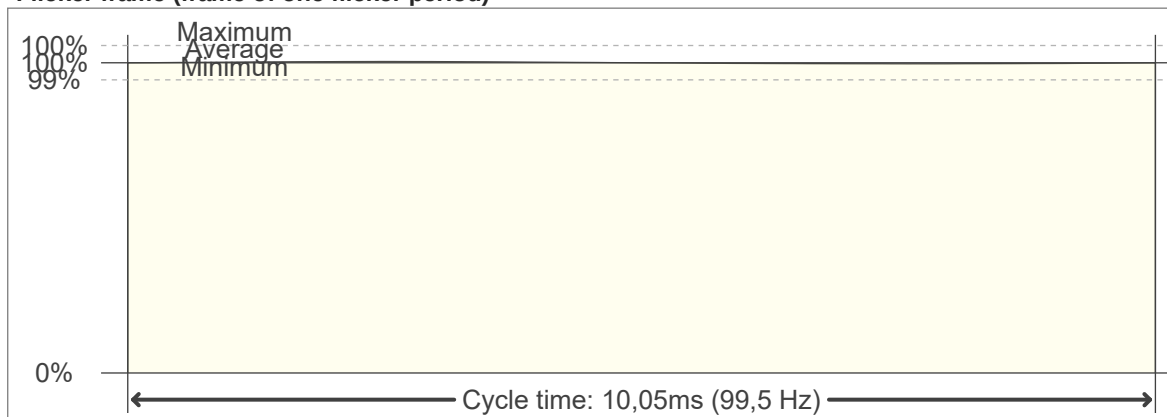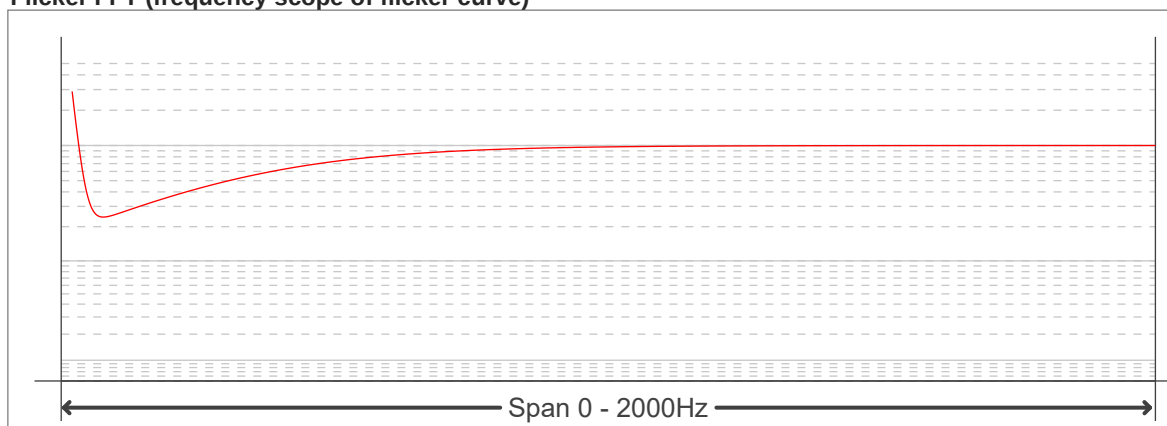Flicker curve (complete sampled flicker signal)

Flicker frame (frame of one flicker period)

Flicker FFT (frequency scope of flicker curve)

Flicker results:

Flicker frequency:		99,5 Hz	
Flicker index:	0	JA8/10 40Hz	0,03 %
Flicker percentage:	0,41 %	JA8/10 90Hz	0,04 %
SVM: (Visual flicker)	0,01	JA8/10 200Hz	0,39 %
PstLM	0,03	JA8/10 400Hz	0,4 %
Mp	0,02	JA8/10 1000Hz	0,4 %

Flicker conditions:

Sample rate:	20000 samples/second
--------------	----------------------