

BG Series LED Batten installation instructions (Color scheme)

Specifications

Power	15W	20W	30W	40W	40W	50W
Input voltage	AC220-240V 50/60Hz					
Input current	0.065A	0.087A	0.13A	0.174A	0.174A	0.218A
Power factor	>0.9	>0.9	>0.9	>0.9	>0.9	>0.9
Lifetime:	Up to 25000 hours					
IP Rating:	IP20					

Tools Required: Cross screwdriver

Notice



Read thoroughly before installing. the luminaire shall be installed by a qualified electrician, and hand over these introductions to user for maintenance afterwards. Once turn on the luminaire, after about 1 second the lamp will light. The delay is normal and is due to the soft start circuitry of the Driver.

Warning



Turn off the main power before maintenance. If not, may cause the risk of electric shock and fire. Check the strength of installation material. If installed incorrectly, may cause the luminaire to drop down. Terminal block not included. Installation may require advice from a qualified person.

It is recommended to use a supply box with a minimum IP rating of IP 20. The requirement of connect light using 2P terminal. The terminal's rated voltage is 450 V, rated capacity (current) is 15 A, the capacity wire of terminal cannot less than 2 x 0,75mm².


The external flexible cable or cord of this luminaire cannot be replaced; if the cord is damaged, the luminaire shall be destroyed. The light source of this luminaire is not replaceable; when the light source reaches its end of life the whole luminaire shall be replaced. The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person. Having issued this warning the company accepts NO responsibility for issues arising from any failure to comply with this clear instruction. The Corp will not accept responsibility for any other issues arising from improper use or fitting of this product as these matters are beyond our control.

Warrenty

This product is under warranty from manufacturing defects only. The warranty is valid for two (2) years from the date of purchase. This warranty does not apply to damage caused by improper installation or abnormal wear and tear. There is no warranty against damage to any surface due to incorrect removal or installation.

Dimensions

	L(mm)	W(mm)	H(mm)
Model 15W	300	75	28
Model 20W	600	75	28
Model 40W	1200	75	28
Model 50W	1500	75	28

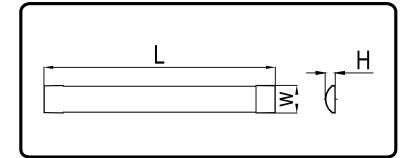


Installation

Strictly follow these instructions for installing.


1. Installing the brackets




2. Use tools to remove the bottom

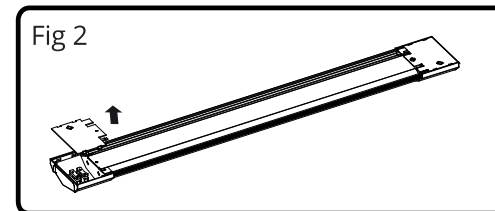


3. Connect the connecting lead to the cover terminal post

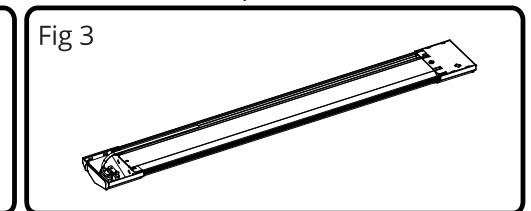

4. Install the bottem cover and secure the screws with tools

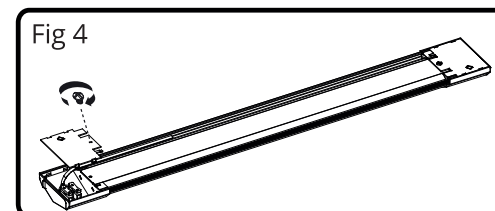

5. Putting the bracket into the mounting slot of the light and pushing the light to fixing

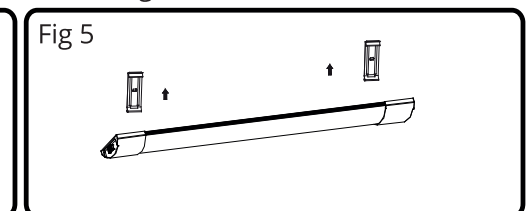

6. Turning on the power to make sure the light is working