

Please read the instruction manual before installation.

Features:

- ✧ Equipped with foam silicone seal and protective plastic shell and the lampshade
- ✧ Suitable for ceiling mounting
- ✧ IP Rating: IP54.
- ✧ Wattage: 15W,20W
- ✧ Working Voltage/Frequency: AC175-265V / 50Hz/60Hz.

Application:

- ✧ Indoor and damp environment.

Safety tips:

- ✧ The installation, inspection and maintenance work shall be carried out by authorized electrician only acc.to national wiring rules.
- ✧ It is strictly prohibited to touch the light source when the lamp work.
- ✧ While fault occurs, please cut off the power supply, do not repair the lamp by yourself.
- ✧ The purpose of lighting maintenance work must be done by electrical and professional maintenance staff to complete.

Specifications

model	LED-BU05-15W-R	LED-BU05-15W-E	LED-BU05-20W-R
Voltage	175-265V~50/60Hz		
Rated power	15W	15W	20W
lumen	1175lm	1175lm	1700lm
LED	6000K		


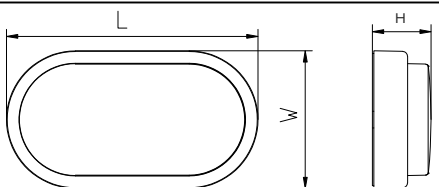



Remark:

The bulkhead is without terminal box. We kindly advise you to use a IP44 waterproof terminal box.

Environment protection:

Please do not treat the waste electrical products as the same as the domestic waste. Obey to the advice of the local government and vendors to recycle the waste electrical products.

1 . Installation:

				
	Model	L	W	H
	LED-BU05-15W-E	220mm	110mm	62mm
				
	Model	D	H	
	LED-BU05-15W-R	170mm	65mm	
	LED-BU05-20W-R	220mm	65mm	

2 . Connection

