

Light efficiency:



Light quality:



Color temperature:



Output: 3641 lm

Peak: 1748 cd

Power: 24,7 W

PF: 0,96



Tracking number: [VT241001-007241](#)

Product name:

802233-3000K

Item number:


802233-3000K

Date and time:

1-10-2024 09:46:38

Description:

**BACK-LIT LED PANEEL | CUPID |
120X30CM | 25W**

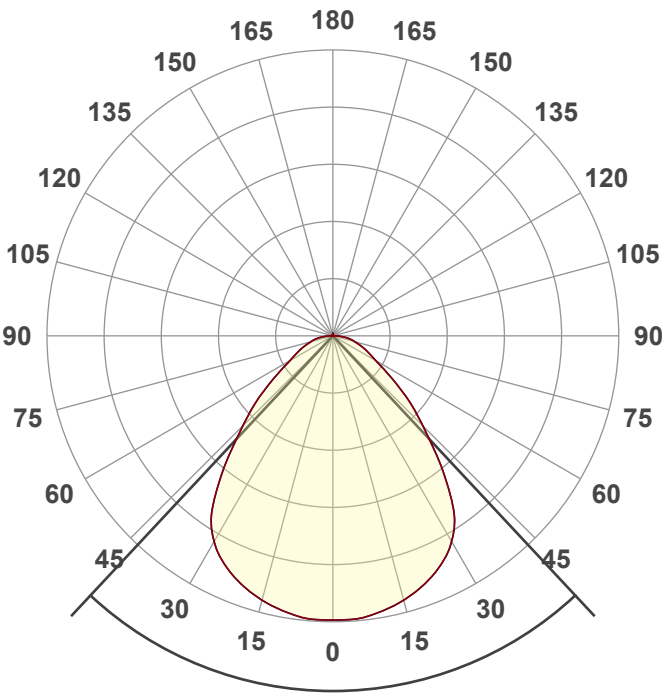


Beam angle

86,1°






CIE 1931
x: 0,437
y: 0,404

Spectra

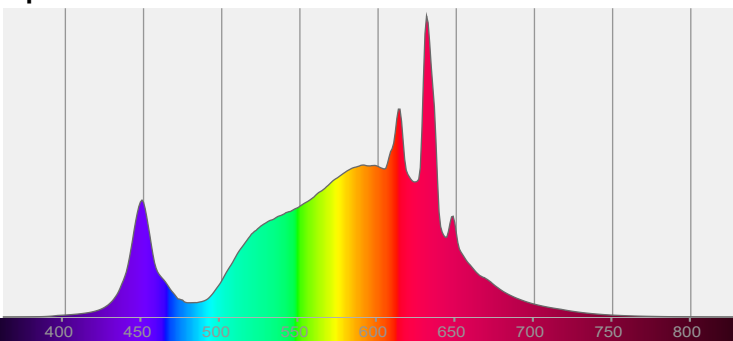



Power

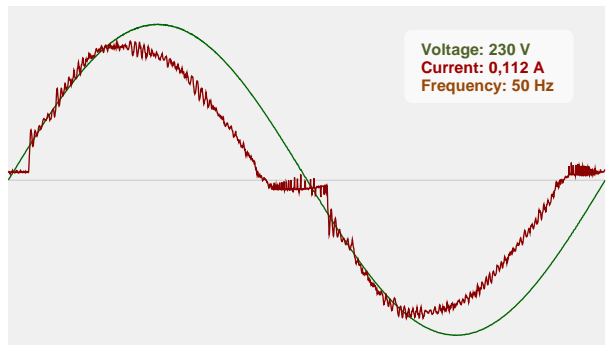

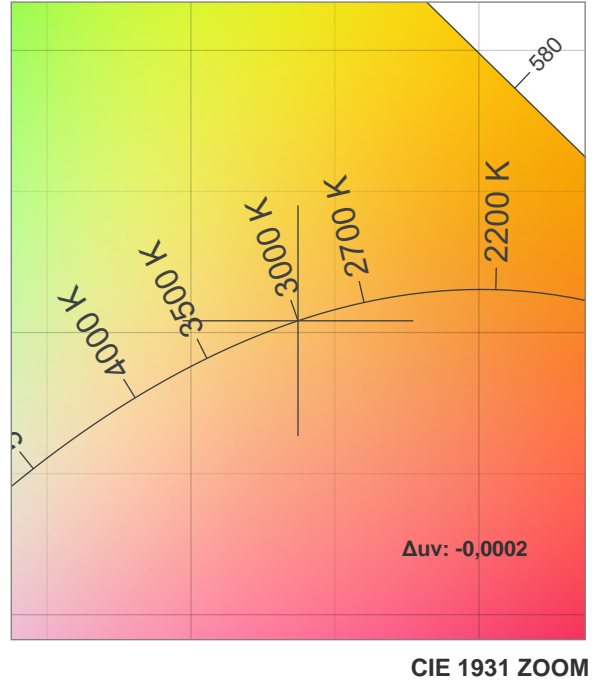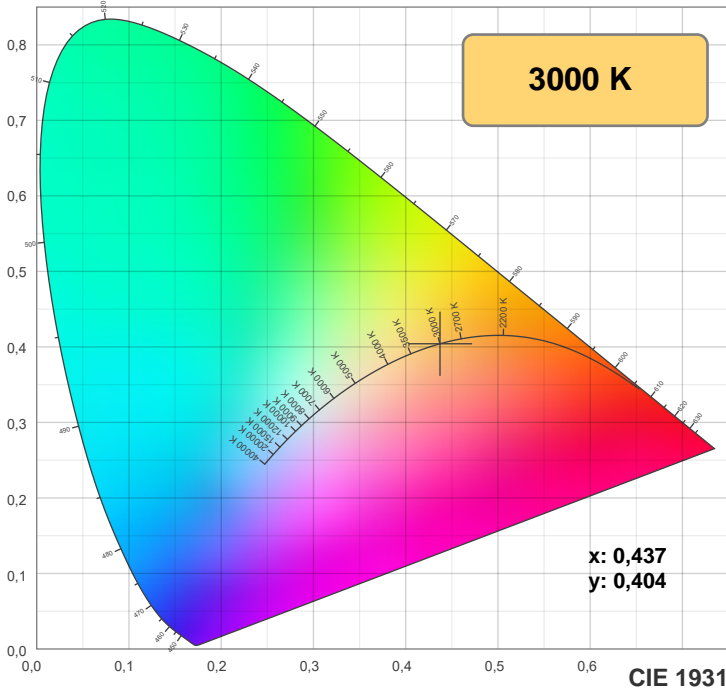


TM-30: 81,2

CRI: 82,6 (R1-R8)

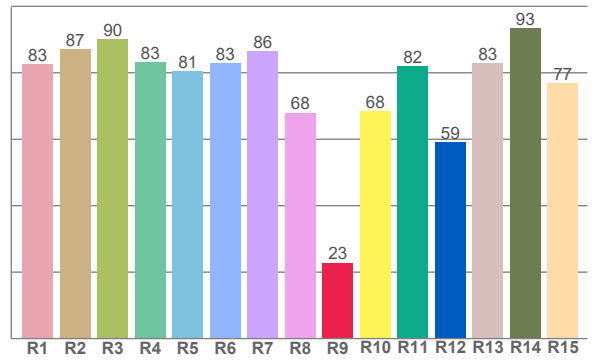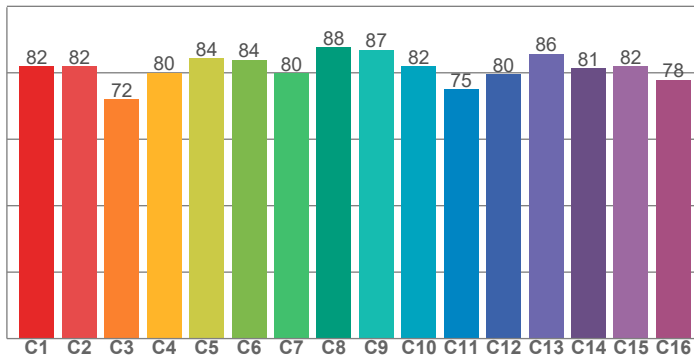

CQS: 80,3

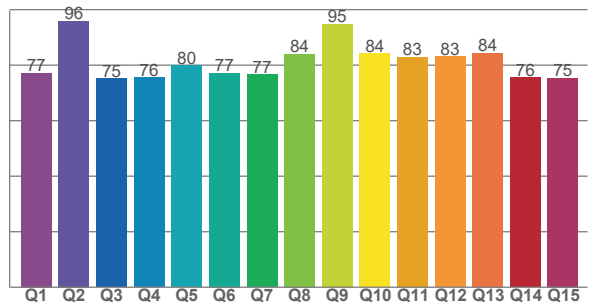

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
82,5	87,1	90,1	83,1	80,5	82,8	86,4	68,0	22,9	68,3	81,9	59,1	82,9	93,3	76,9

TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
82,0	81,9	72,0	80,0	84,4	83,9	79,8	87,6	86,9	81,9	75,1	79,6	85,8	81,4	81,9	77,9

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
77,2	95,9	75,1	75,6	79,8	77,1	76,6	84,0	94,9	84,1	83,0	83,2	84,3	75,6	75,4







Color parameters


Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
3000 K	82,6	22,9	81,2	100,7	80,3	0,437	0,404	0,251	0,348	-0,0002

Rf 81,2
Fidelity index Rf

Rg 100,7
Gamut index Rg

Hue Bin	R _f	Shifts (%)	
		Chroma	Hue
1	82	-10%	-3%
2	82	-8%	7%
3	72	-2%	15%
4	80	5%	12%
5	84	10%	9%
6	84	10%	-2%
7	80	4%	-12%
8	88	-1%	-8%
9	87	-7%	-3%
10	82	-9%	7%
11	75	-4%	17%
12	80	7%	9%
13	86	9%	-2%
14	81	10%	-11%
15	82	3%	-11%
16	78	-4%	-17%

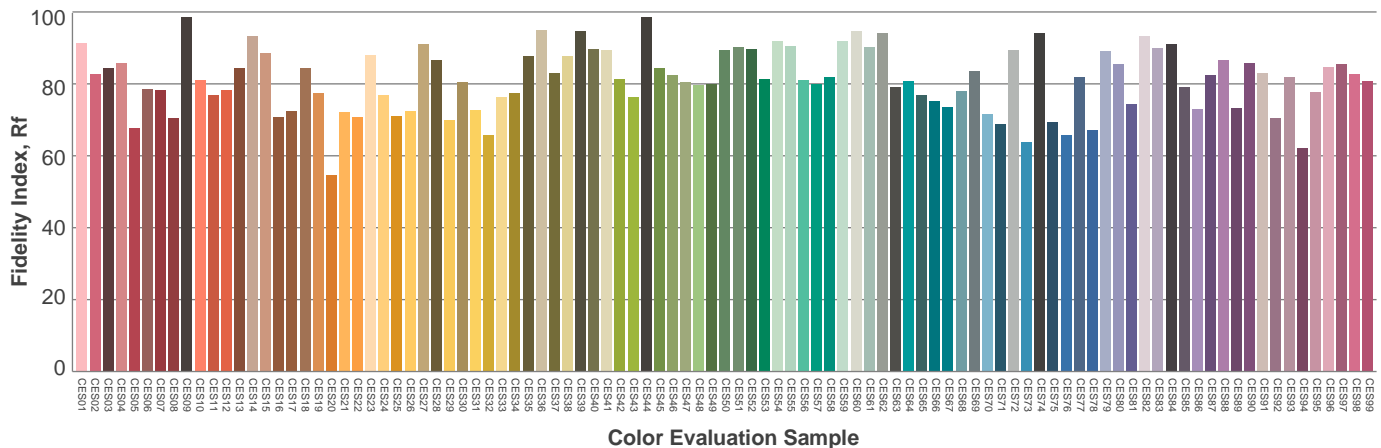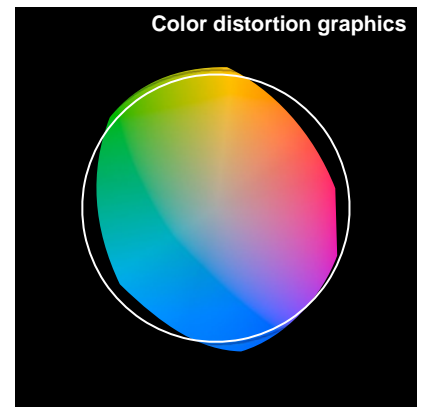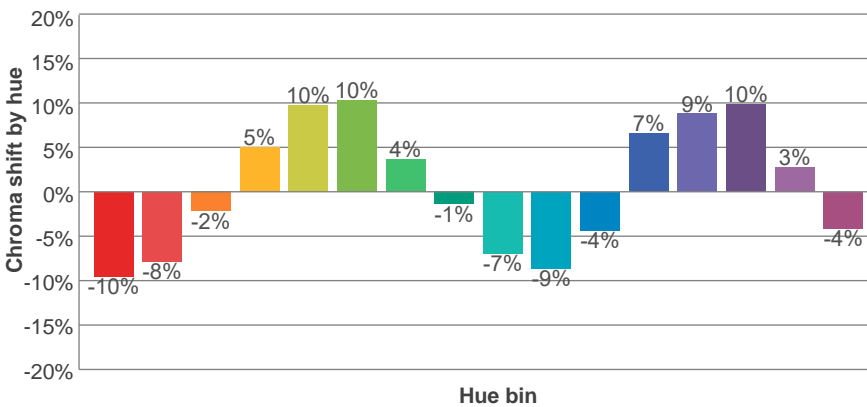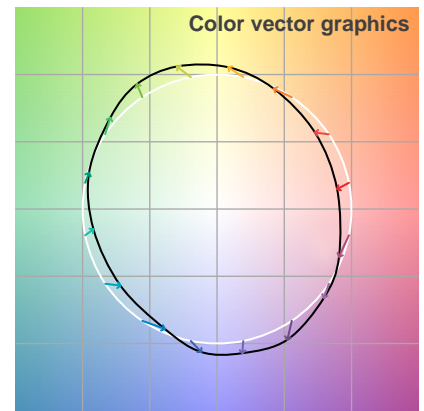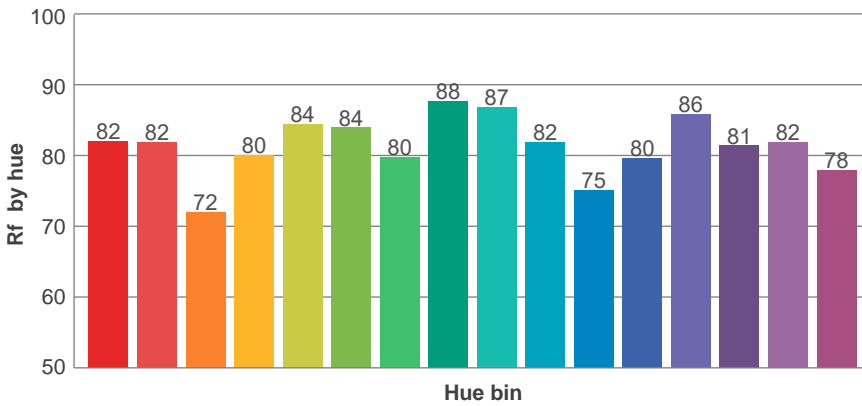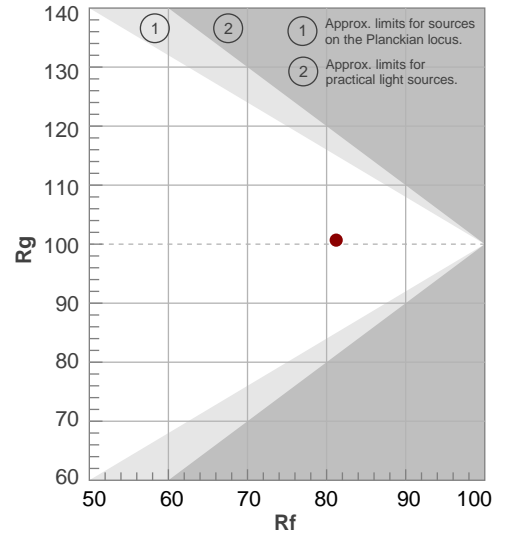

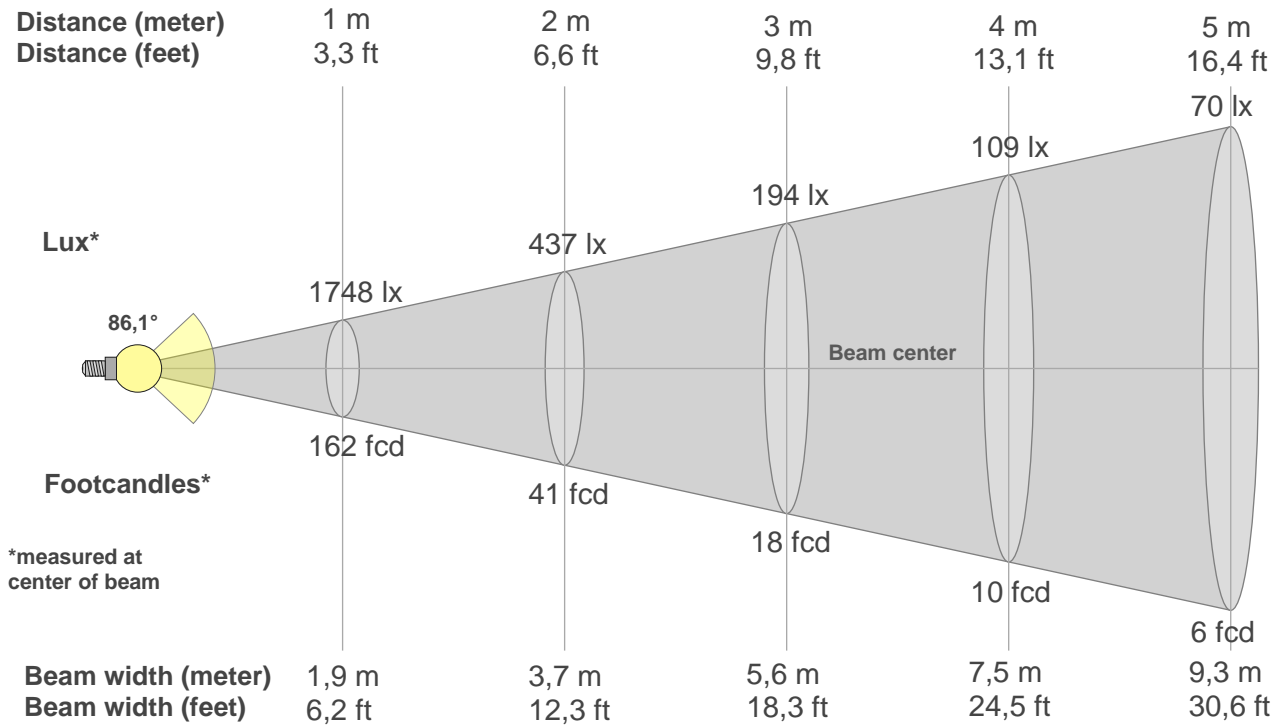

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	19,7ft	23ft	26,2ft	29,5ft	32,8ft	36,1ft	39,4ft	42,7ft	45,9ft	49,2ft	52,5ft	55,8ft	59,1ft	62,3ft	65,6ft
1748lx	437lx	194lx	109lx	70lx	49lx	36lx	27lx	22lx	17lx	14lx	12lx	10lx	9lx	8lx	7lx	6lx	5lx	5lx	4lx
162,4fc	40,6fcd	18fcd	10,1fcd	6,5fcd	4,5fcd	3,3fcd	2,5fcd	2fcd	1,6fcd	1,3fcd	1,1fcd	1fcd	0,8fcd	0,7fcd	0,6fcd	0,6fcd	0,5fcd	0,4fcd	0,4fcd

Intensities in 0° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
1748	1744	1720	1682	1629	1559	1456	1286	1029	786	598	429	308	240	187	139	103	58	17	5
100%	100%	98%	96%	93%	89%	83%	74%	59%	45%	34%	25%	18%	14%	11%	8%	6%	3%	1%	0%

Intensities in 90° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
1748	1744	1720	1682	1629	1559	1456	1286	1029	786	598	429	308	240	187	139	103	58	17	5
100%	100%	98%	96%	93%	89%	83%	74%	59%	45%	34%	25%	18%	14%	11%	8%	6%	3%	1%	0%

Intensities in 180° c-plane


0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
1748	1744	1720	1682	1629	1559	1456	1286	1029	786	598	429	308	240	187	139	103	58	17	5
100%	100%	98%	96%	93%	89%	83%	74%	59%	45%	34%	25%	18%	14%	11%	8%	6%	3%	1%	0%

Intensities in 270° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
1748	1744	1720	1682	1629	1559	1456	1286	1029	786	598	429	308	240	187	139	103	58	17	5
100%	100%	98%	96%	93%	89%	83%	74%	59%	45%	34%	25%	18%	14%	11%	8%	6%	3%	1%	0%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
86,1°	142,4°	173,1°	86,5%	68,2%

iso-candela diagram

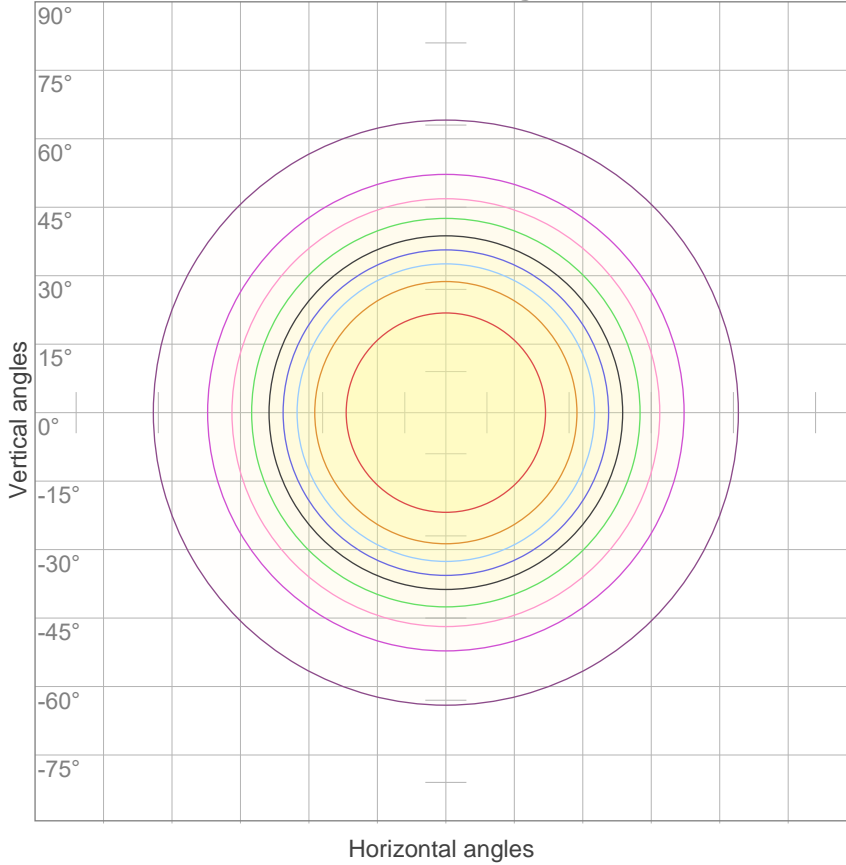


10%	175 cd
20%	350 cd
30%	524 cd
40%	699 cd
50%	874 cd
60%	1049 cd
70%	1224 cd
80%	1398 cd
90%	1573 cd

Conditions:

Number of c-planes: 12

Candela at center: 1748 cd

iso-lux diagram

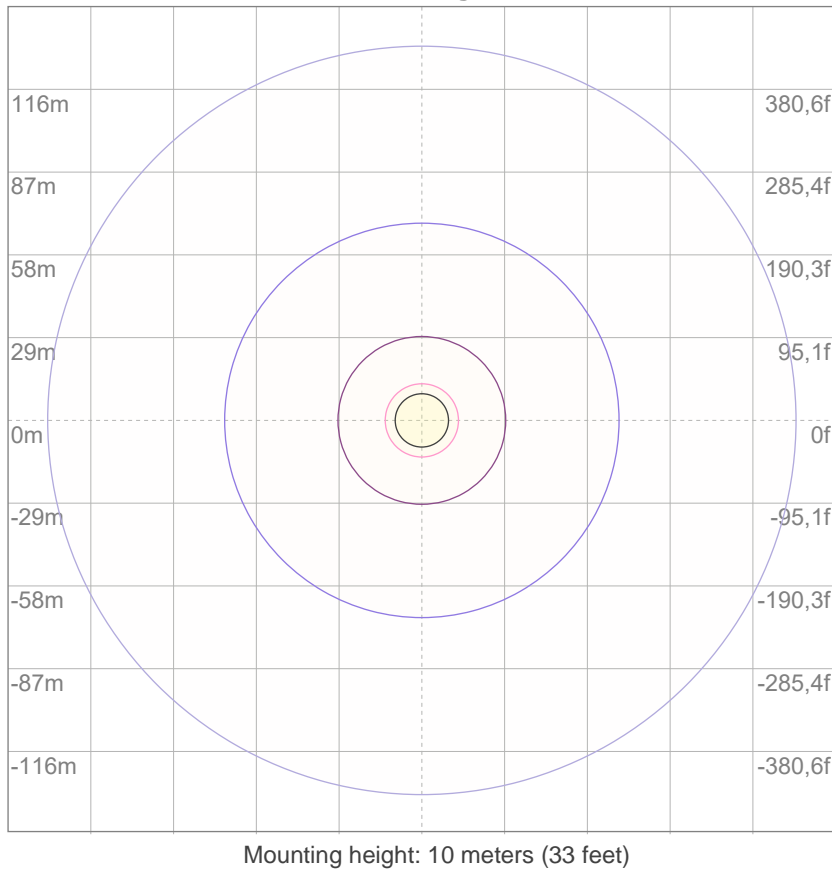

3%	0,524 lx
5%	0,874 lx
10%	1,75 lx
30%	5,24 lx
50%	8,74 lx

Conditions:

Number of c-planes: 12

Lux at center: 17,5 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.

Glare evaluation according to UGR


p Ceiling	70	70	50	50	30	70	70	50	50	30	
p Walls	50	30	50	30	30	50	30	50	30	30	
p Floor	20	20	20	20	20	20	20	20	20	20	
Room size X Y	Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	15,1	16,1	15,3	16,4	16,7	15,0	16,1	15,2	16,4	16,6
	3H	15,9	17,0	16,3	17,3	17,5	15,8	16,9	16,2	17,1	17,4
	4H	16,3	17,4	16,8	17,7	17,9	16,2	17,2	16,6	17,5	17,8
	6H	16,9	17,8	17,2	18,1	18,5	16,7	17,6	17,0	17,9	18,3
	8H	17,1	18,0	17,4	18,3	18,7	16,9	17,8	17,2	18,1	18,5
12H	17,2	18,1	17,6	18,5	18,9	17,0	17,9	17,4	18,2	18,7	
4H	2H	15,3	16,4	15,7	16,6	16,9	15,3	16,3	15,7	16,6	16,9
	3H	16,5	17,3	16,9	17,7	18,2	16,4	17,2	16,8	17,6	18,1
	4H	17,0	17,8	17,5	18,2	18,8	16,9	17,7	17,3	18,1	18,7
	6H	17,7	18,4	18,2	18,8	19,2	17,5	18,3	18,0	18,6	19,0
	8H	17,9	18,6	18,5	19,0	19,4	17,7	18,4	18,3	18,8	19,2
12H	18,2	18,8	18,7	19,2	19,7	17,9	18,5	18,5	19,0	19,4	
8H	4H	17,2	17,9	17,8	18,3	18,7	17,1	17,8	17,7	18,2	18,6
	6H	18,1	18,6	18,6	19,1	19,6	17,9	18,4	18,4	18,9	19,5
	8H	18,5	18,9	19,0	19,5	20,1	18,3	18,7	18,8	19,3	19,9
	12H	18,9	19,2	19,5	19,8	20,4	18,6	19,0	19,2	19,5	20,1
12H	4H	17,3	17,8	17,8	18,3	18,8	17,1	17,7	17,7	18,2	18,7
	6H	18,2	18,6	18,7	19,2	19,8	18,0	18,5	18,6	19,0	19,7
	8H	18,6	19,0	19,2	19,5	20,1	18,4	18,8	19,0	19,3	20,0
Variation of the observer position for the luminaire distance S											
S = 1.0H	0,2 / -0,3					0,2 / -0,3					
S = 1.5H	0,5 / -0,5					0,5 / -0,6					
S = 2.0H	1,1 / -0,8					1,1 / -0,9					
CIE 117-1995. Corrected glare indices referring to 3641 lm total luminous flux											

Coefficients of Utilization

Ceiling reflectance	80				70				50			30			10			0			
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0			
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio)																				
	Room Values are expressed as percentage of Lumens delivered to the task surface																				
0	119	119	119	119	116	116	116	116	110	110	110	106	106	106	101	101	101	99			
1	110	106	102	99	107	103	100	97	99	96	94	95	93	91	91	89	88	86			
2	101	94	88	83	99	92	87	82	89	84	80	85	82	78	82	79	76	74			
3	94	84	77	72	91	83	76	71	80	74	70	77	72	68	74	70	67	65			
4	87	76	68	62	85	75	68	62	72	66	61	70	64	60	68	63	59	57			
5	81	69	61	55	79	68	60	55	66	59	54	64	58	53	62	57	53	51			
6	75	63	55	49	73	62	54	49	60	53	48	58	52	48	57	51	47	45			
7	70	58	50	44	68	57	49	44	55	48	43	54	48	43	52	47	43	41			
8	65	53	45	40	64	52	45	40	51	44	39	50	44	39	48	43	39	37			
9	61	49	41	36	60	48	41	36	47	41	36	46	40	36	45	39	35	34			
10	58	45	38	33	56	45	38	33	44	37	33	43	37	33	42	36	33	31			

LAMPS (number of lamps)

Luminaire budgetary diagram

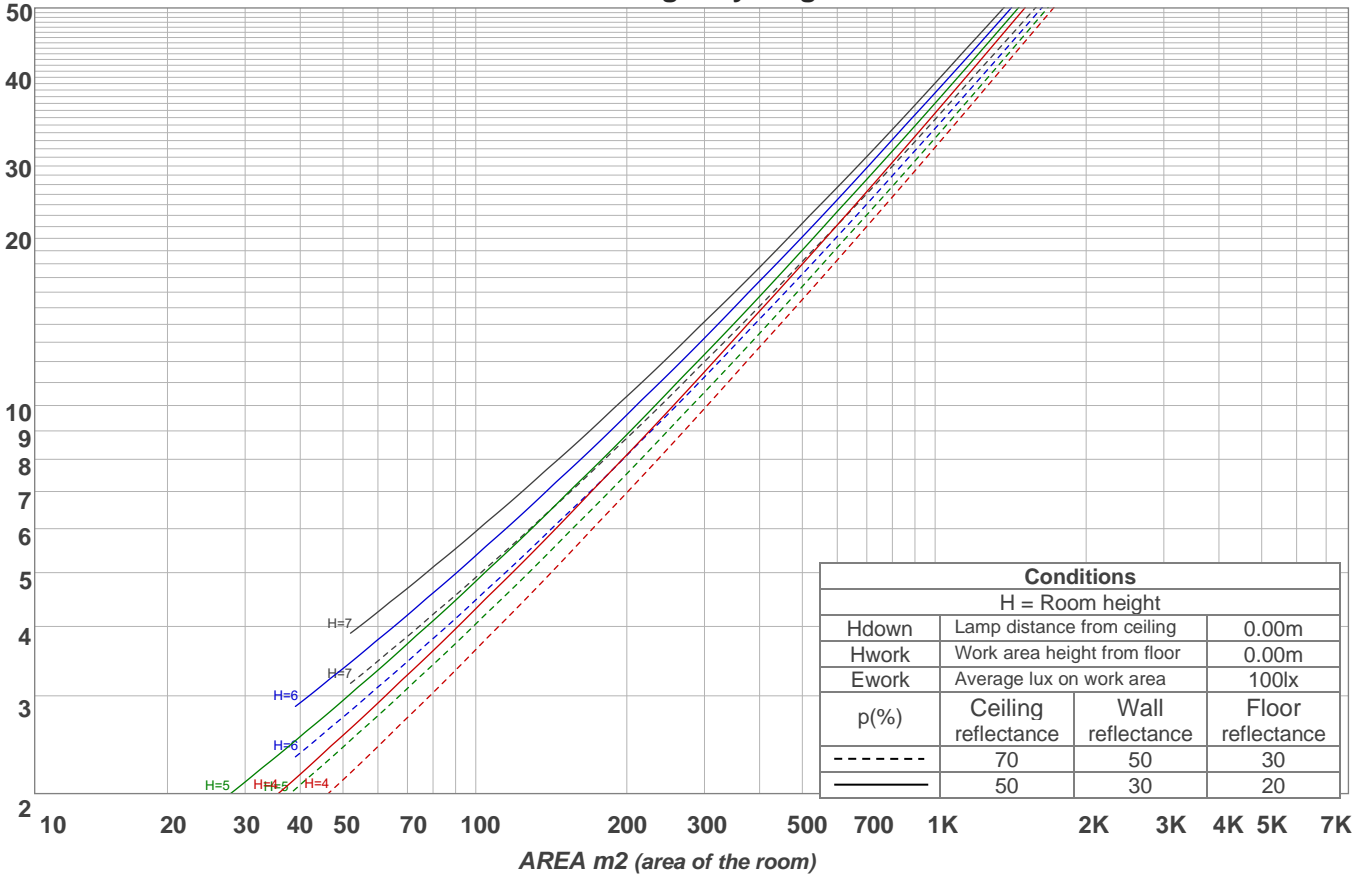


Zonal Lumen Summary

0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
{LUM0-10}	475 lm	717 lm	791 lm	611 lm	388 lm	240 lm	150 lm	63,1 lm
90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
8,03 lm	5,28 lm	5,46 lm	5,45 lm	5,17 lm	4,42 lm	3,42 lm	2,18 lm	0,757 lm


LCS table

BUG rating:	B2 U2 G1	
Forward light	Lumens	Lumens %
Low(0-30):	678,1	18,6%
Medium(30-60):	895,7	24,6%
High(60-80):	194,8	5,4%
Very high(80-90):	31,7	0,9%
Back light		
Low(0-30):	678,1	18,6%
Medium(30-60):	895,7	24,6%
High(60-80):	194,8	5,4%
Very high(80-90):	31,7	0,9%
Uplight		
Low(90-100):	8,2	0,2%
High(100-180):	32,1	0,9%

LCS graph

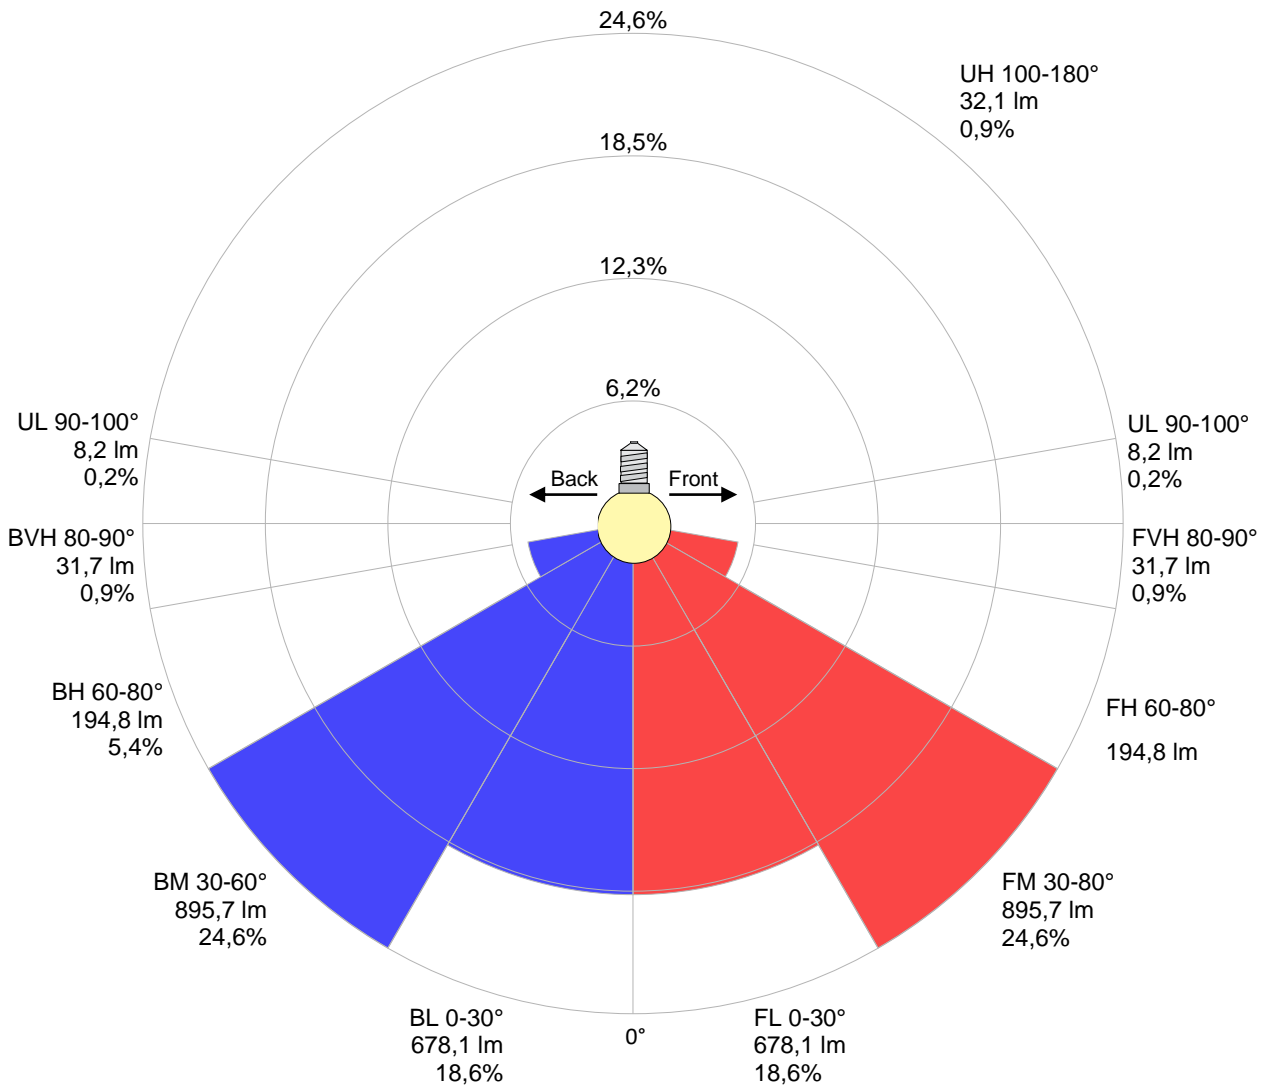

Warmup curve

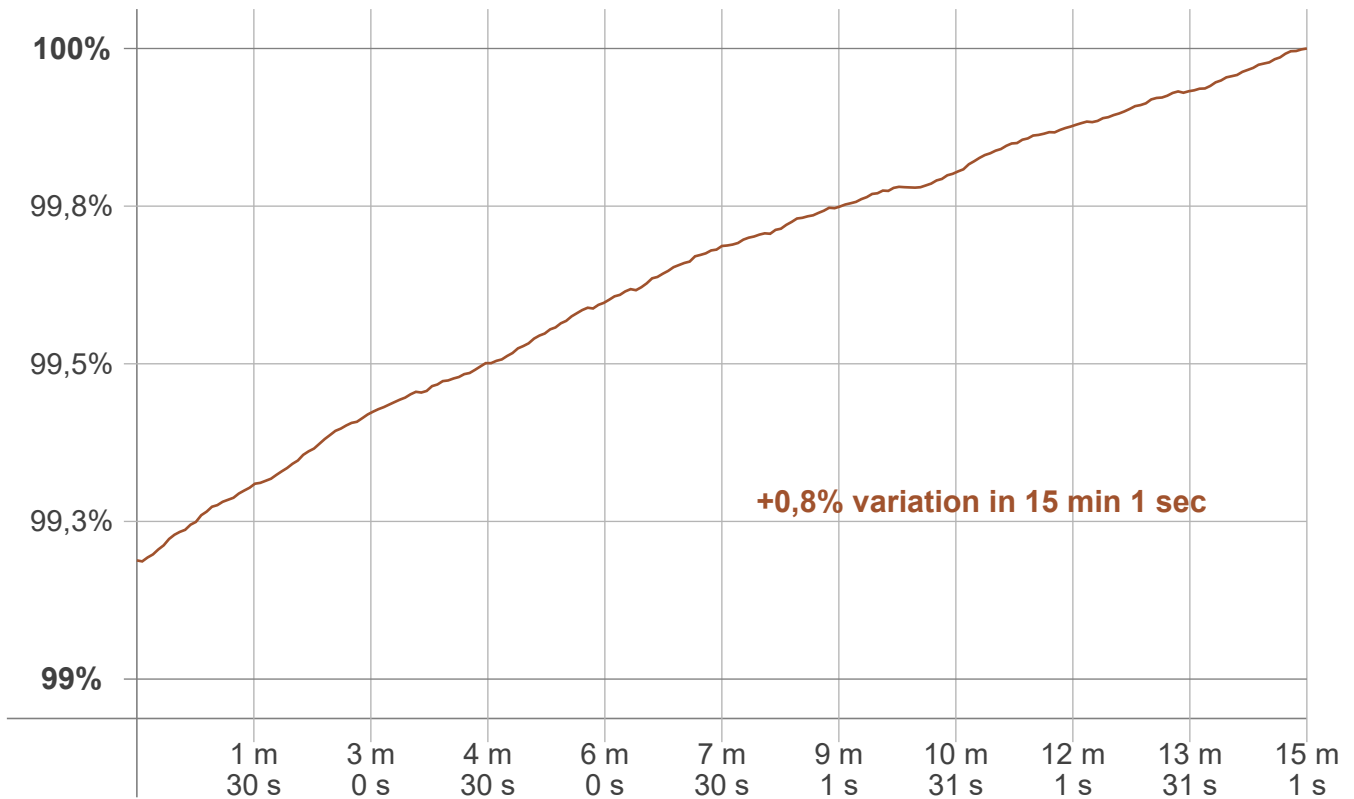

Warmup result

Warmup time:	Lamp stabilized in 15 min 1 sec
Warmup variation	+0,8%

Warmup conditions

Stable period:	15 min
Stable change max:	2,0%
Minimum time:	15 min

Color temperature change

CCT start	CCT change	CCT end
2999 K	+1 K	3000 K


Output change

Output start	Output change	Output end
3612 lm	+29 lm	3641 lm

Flicker curve (complete sampled flicker signal)



Flicker frame (frame of one flicker period)

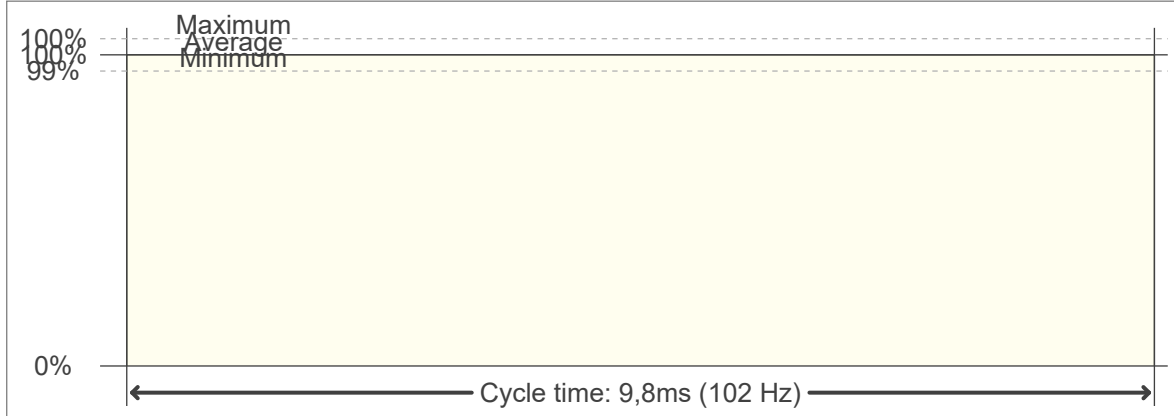

Flicker FFT (frequency scope of flicker curve)



Flicker results:

Flicker frequency:		102,04 Hz	
Flicker index:	0	JA8/10 40Hz	0,02 %
Flicker percentage:	0,1 %	JA8/10 90Hz	0,02 %
SVM: (Visual flicker)	0	JA8/10 200Hz	0,08 %
PstLM	0,01	JA8/10 400Hz	0,09 %
Mp	0,01	JA8/10 1000Hz	0,09 %

Flicker conditions:

Sample rate:	20000 samples/second
--------------	----------------------