

Light Measurement Report

Print date: 11-2-2025

Measurement date and time: 10-2-2025 17:10:27 – Measurement no. VFR-250210-3343-MS

Measurement tracking No. and Link: [VT250210-001499](#)

Operator:



Laboratory and Equipment

Laboratory Owner and Location

Goniospectrometer System and Type

Sensor Name, Calibr. Date and Serial No.

Spectrometer Manufacturer and Model

Viso Systems, Copenhagen V, Denmark

LabSpion – Type C, horizontal

LabSensor Model2 – 11-1-2024 – 3130191315

Ibsen Photonics, Denmark – Freedom VIS (Custom Viso)

Measurement Conditions

Number of C-planes and Resolution

γ (gamma)-Resolution

Test Distance

Input Power, Power and Displ. Factors

Input RMS Voltage and Current

Frequency of Input Power

Warm-up Time and Variation

12 planes – 30°

5°

4,24 m

23,8 W – PF 0,95 – DPF 0,98

230 V – 0,109 A

50 Hz

Lamp stabilized in 15 min 1 sec – 2,0%

Tested Light Source

Product Name

Item No. and Manufacturer

Product Description (line 1)

DZ-M150-5000K-25W

DZ-M150-5000K-25W – Dutchfulfillment

LED DOWNLIGHT | RAINBOW | 18/25W | CCT SWITCH

Main Light Measurement Results

Output – Total Lumen (Up% / Down%)

Efficiency

Peak Intensity and Beam Angle

Correlated Color Temperature, Target/Measured

Color Rendering Index

Color Rendering TM30-18

Color Shift, CIE duv and MacAdam Steps

Flicker

2157 lm – 0,31% / 99,69%

90 lm/W

756 cd – 111,5°



CCT = 5000 K / 4591 K

CRI 84,2

R_f 84,0 – R_g 92,8

Duv 0,0038 – SDCM 8,2

SVM 1,15 – PstLM 0,11

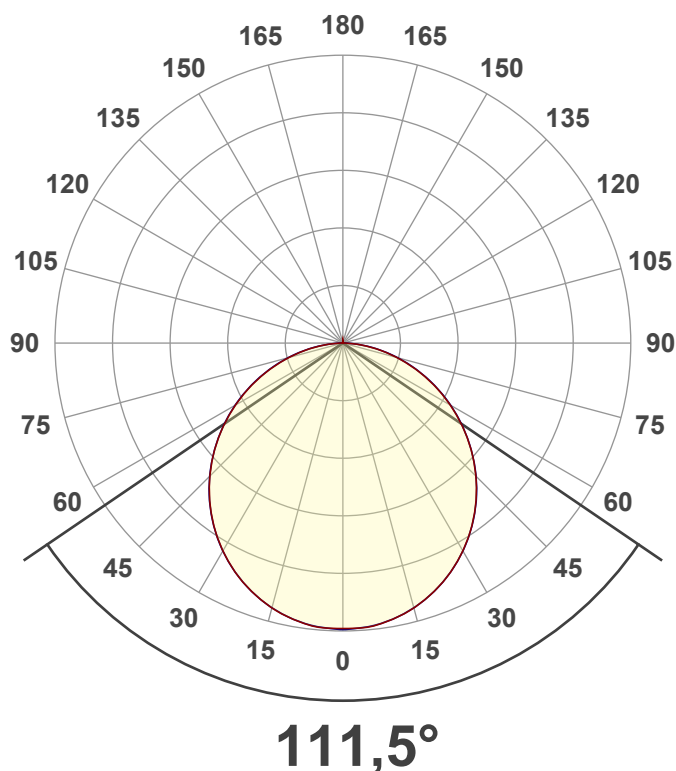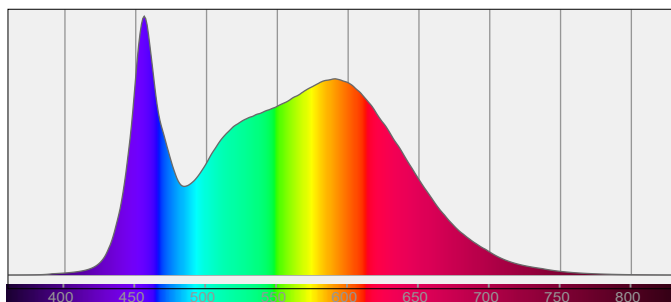

Light Measurement Report

Print date: 11-2-2025

Measurement date and time: 10-2-2025 17:10:27 – Measurement no. VFR-250210-3343-MS


Measurement tracking No. and Link: [VT250210-001499](#)

Operator:



Luminous Intensity diagram

Unit: 0-100% of peak intensity

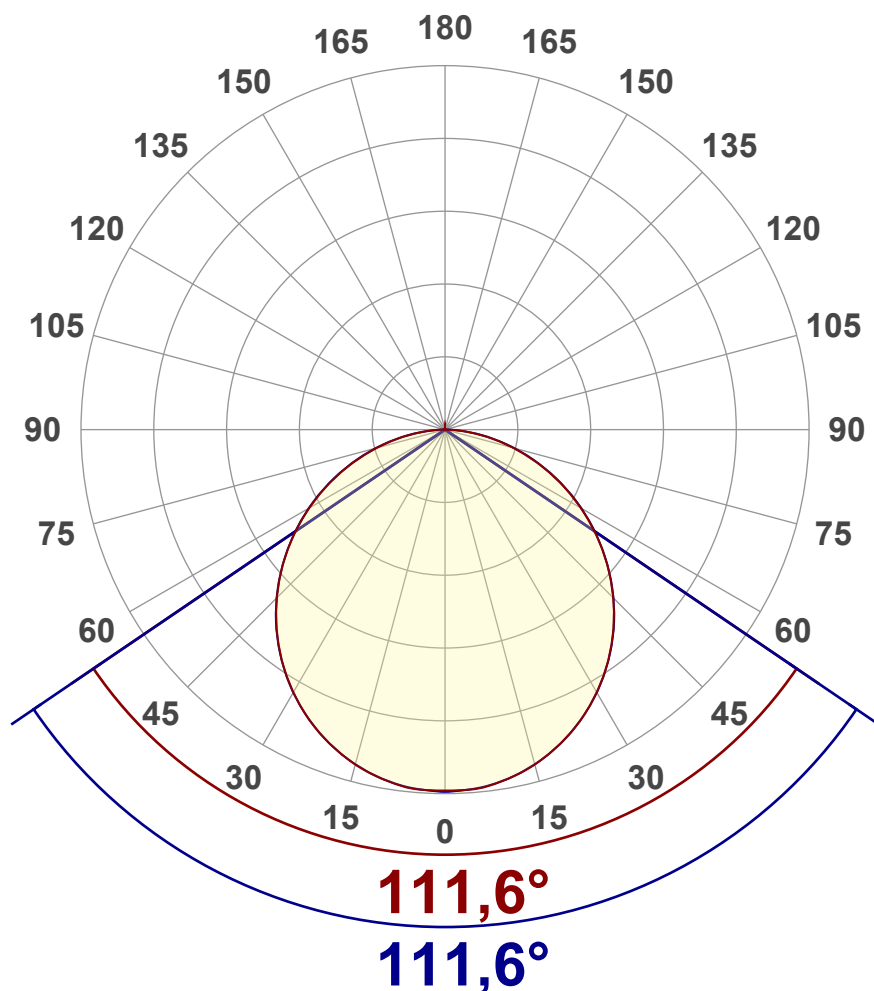

Main Values

Output (total Lumen)	2157 lm
Lumen Up% / Down%	0,31% / 99,69%
Peak Intensity	756 cd
Beam Angle (50%)	111,5°
Beam Angle (90%)	111,6°
Beam Angle (10%)	111,6°

Cut-off Angle

Average 2,5%	175,6°
--------------	--------

Field Angle

Average 10%	163,2°
-------------	--------


Intensity Ratio

In 120° cone	77,9%
In 90° cone	53,2%

C000-C180

C090-C270

Linear distribution diagram - Intensity (candela) vs γ-angle

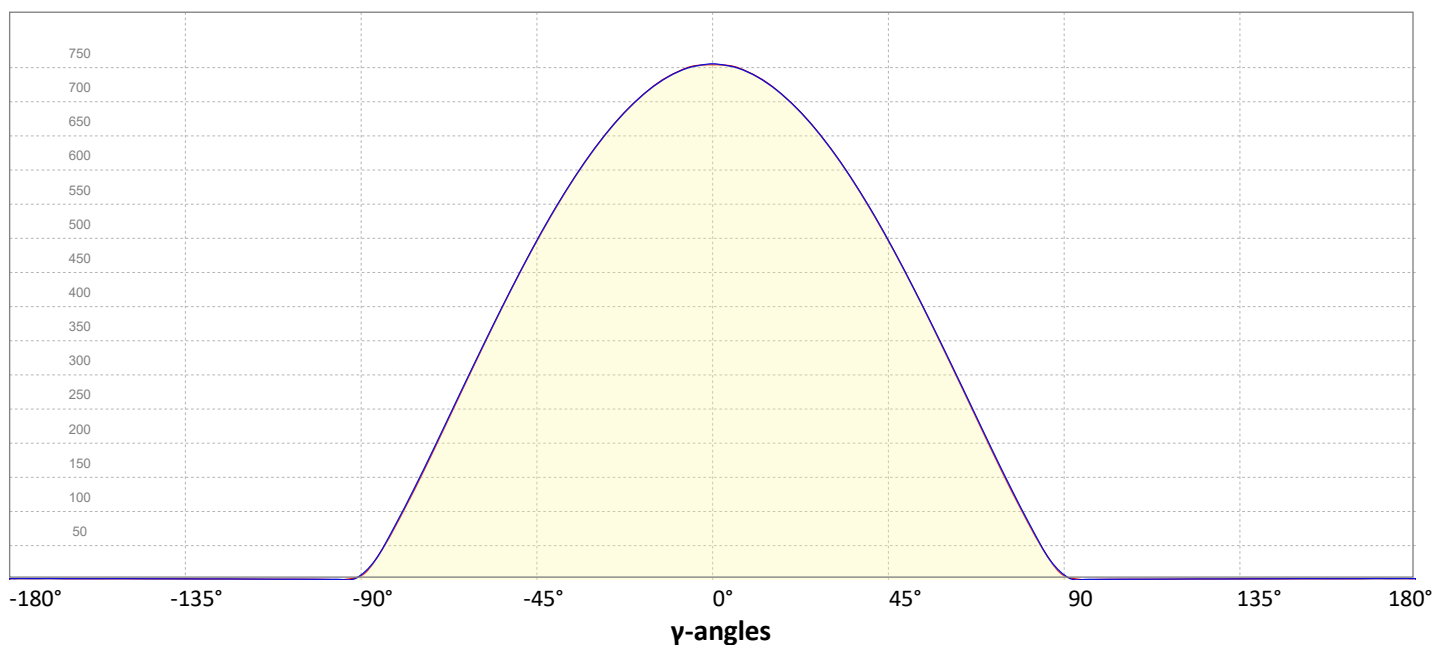


Light Measurement Report


Print date: 11-2-2025
Measurement date and time: 10-2-2025 17:10:27 – Measurement no. VFR-250210-3343-MS
Measurement tracking No. and Link: [VT250210-001499](#)
Operator:



Iso-intensity Diagram (Iso-candela)

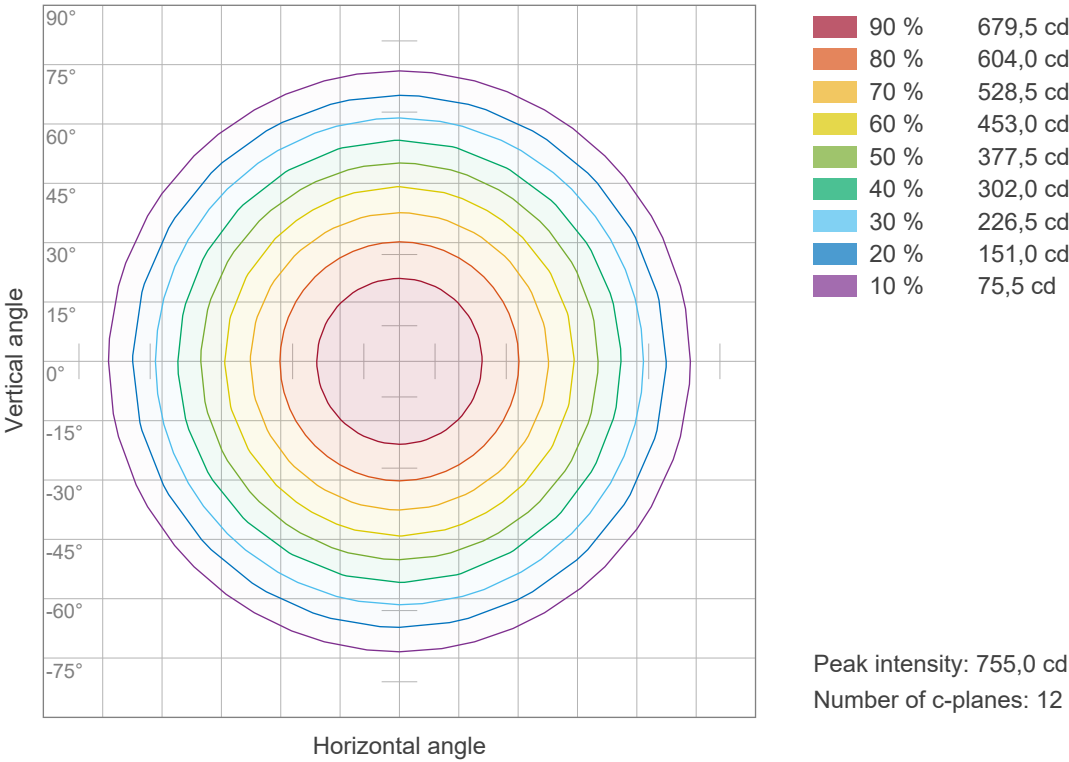

Iso-illuminance Diagram (Iso-lux)

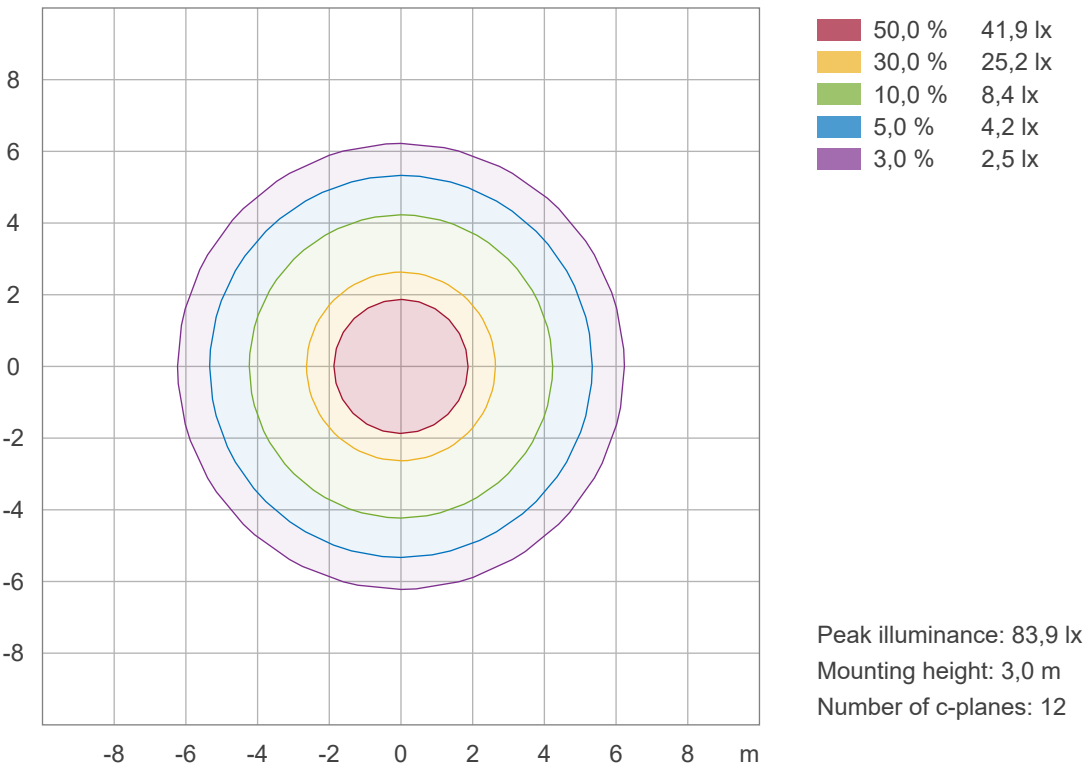

Light Measurement Report

Print date: 11-2-2025

Measurement date and time: 10-2-2025 17:10:27 – Measurement no. VFR-250210-3343-MS

Measurement tracking No. and Link: [VT250210-001499](#)

Operator:




Color details


Correlated Color Temperature, Target CCT = 5000 K
Correlated Color Temperature, Measured CCT = 4591 K
Color Rendering Index CRI 84,2
Color Rendering Index, R9 (red component) R9 = 11,9
Color Rendering TM30-18 R_f 84,0 – R_g 92,8
Color Quality Scale CQS = 83,1

MacAdam Steps
Color coordinates CIE 1931 (x;y) = (0,345;0,352)
Color coordinate CIEs 1960 (u;v) = (0,211;0,323)
Color deviation from BBL Duv = 0,0038
Color coordinate CIEs 1976 (CIELUV) (u';v') = (0,211;0,485)


CIE 1931

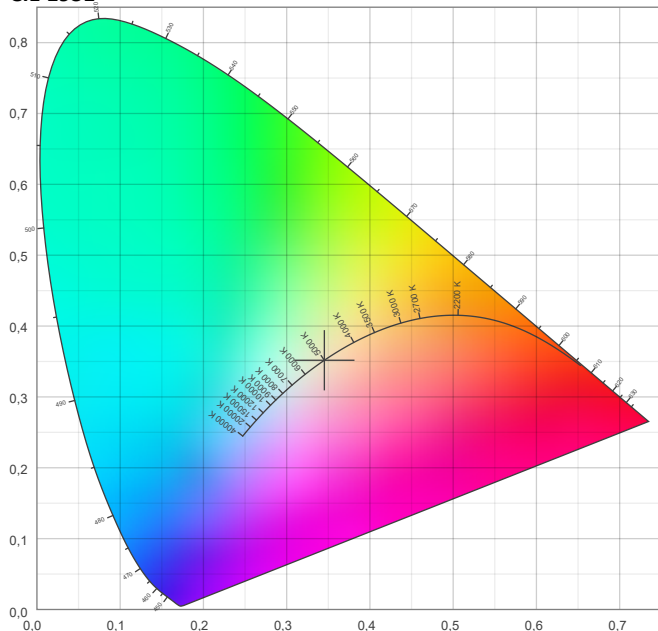

CIE 1931 – zoomed on Planckian locus

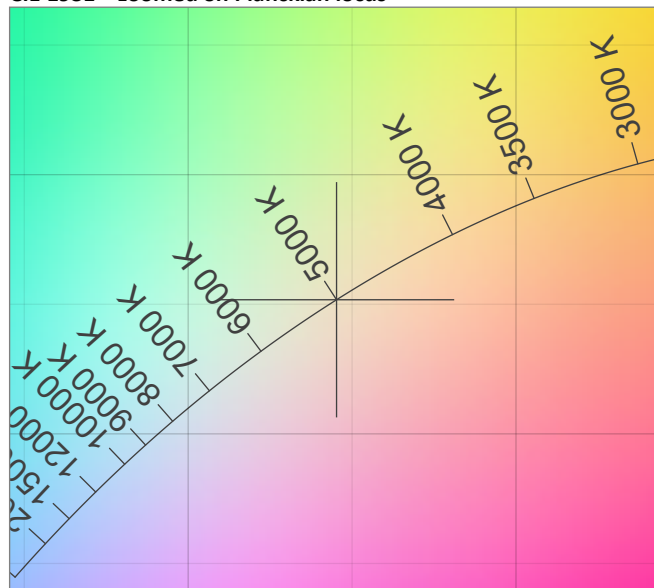


Color Rendering Index per reference color (CIE 1995)

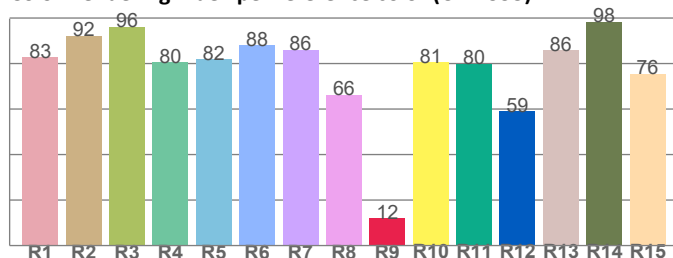


CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
82,8	92,1	96,1	80,5	81,9	88,1	86,1	66,2	11,9	80,5	80,0	59,0	85,8	98,3	75,5

Spectral power distribution (SPD) / W/nm – 0-100%

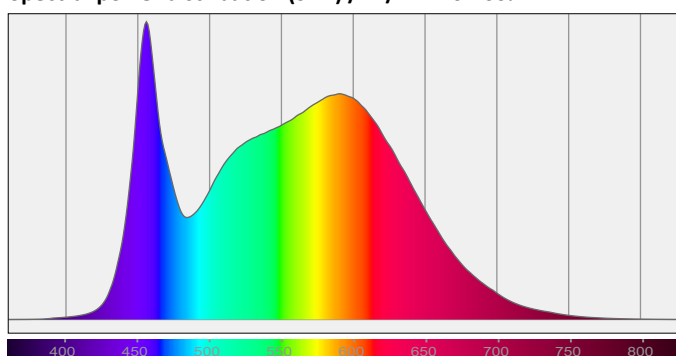


TM30-18 Rf-values per hue bin

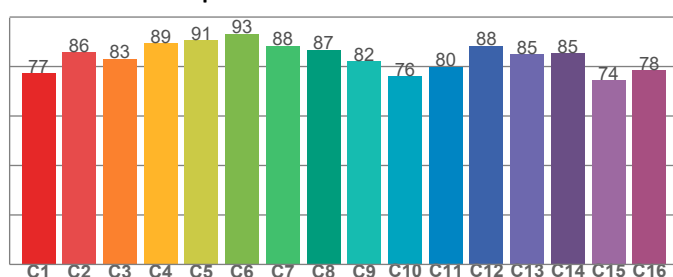

TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
77,2	85,9	83,1	89,3	90,5	93,3	88,4	86,8	82,2	76,1	79,8	88,5	84,9	85,4	74,4	78,5

Color Quality Scale by reference color

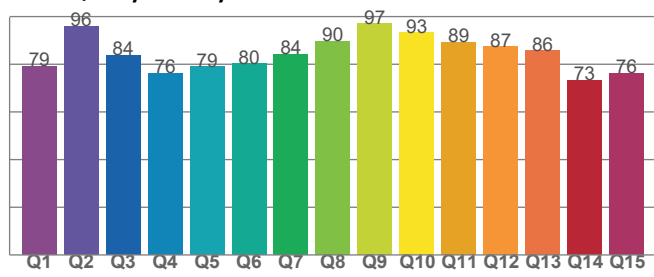

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
79,2	95,9	83,8	76,4	79,0	80,1	84,3	89,6	97,0	93,3	89,3	87,3	85,8	73,2	76,2

Light Measurement Report

Print date: 11-2-2025


Measurement date and time: 10-2-2025 17:10:27 – Measurement no. VFR-250210-3343-MS

Measurement tracking No. and Link: [VT250210-001499](#)

Operator:



Beam Details

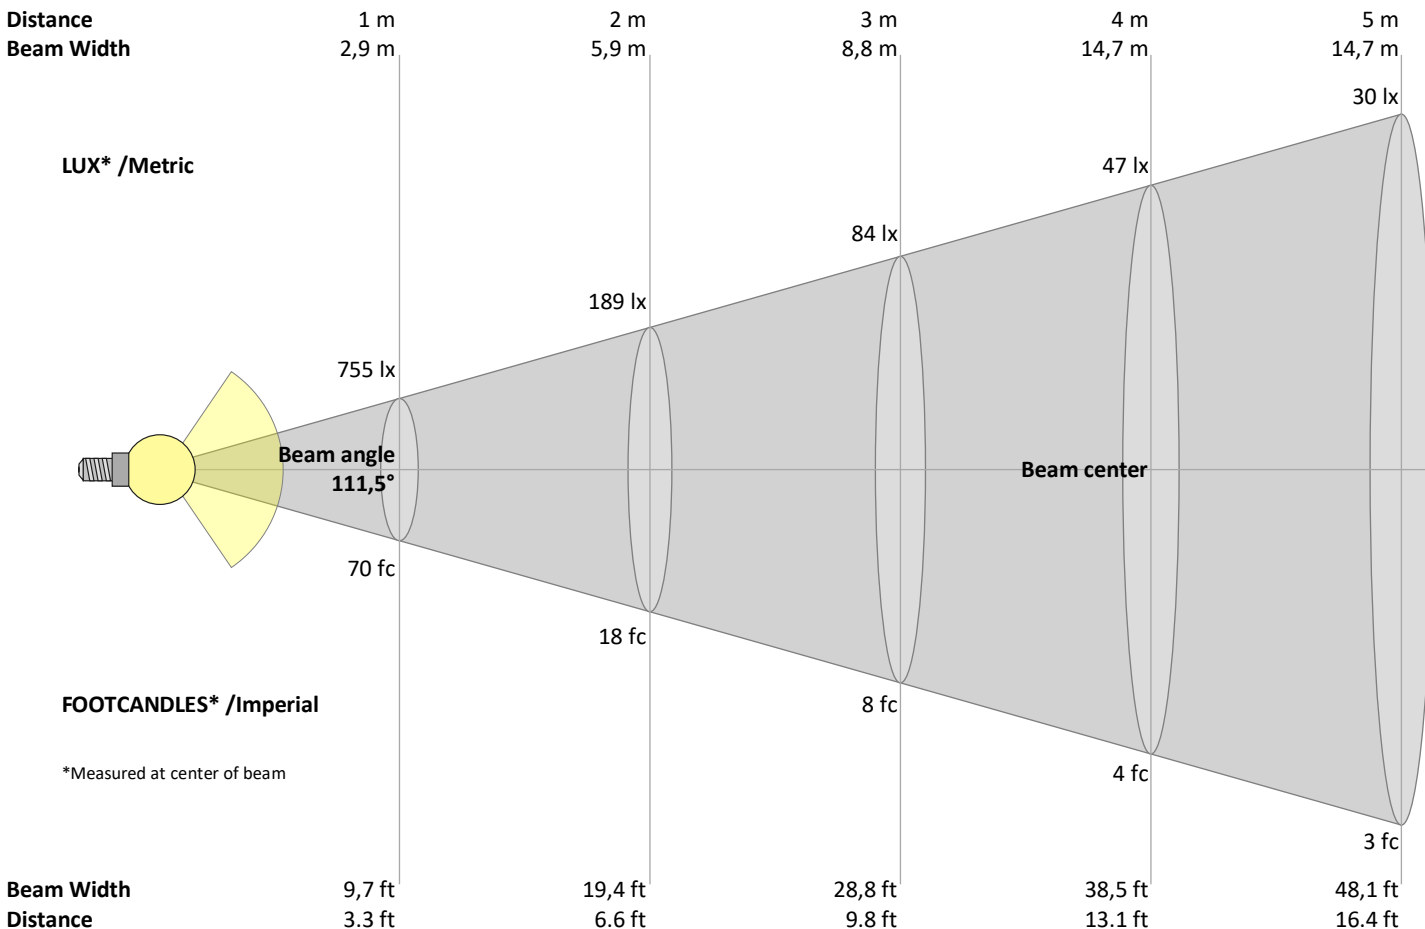

Beam intensities from 1 – 20 m

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	m
3,3	6,6	9,8	13,1	16,4	19,7	23	26,2	29,5	32,8	36,1	39,4	42,7	45,9	49,2	52,5	55,8	59,1	62,3	65,6	ft
755	189	84	47	30	21	15	12	9	8	6	5	4	4	3	3	3	2	2	2	lux
70,1	17,5	7,8	4,4	2,8	1,9	1,4	1,1	0,9	0,7	0,6	0,5	0,4	0,4	0,3	0,3	0,2	0,2	0,2	0,2	fc

Intensities in 0° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°	γ
755	751	741	723	698	669	633	592	546	496	442	386	327	267	207	148	92	42	8	0	cd
100%	100%	98%	96%	93%	89%	84%	78%	72%	66%	59%	51%	43%	35%	27%	20%	12%	6%	1%	0%	of 0°val

Intensities in 90° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°	γ
755	751	740	722	698	668	633	592	546	496	443	386	328	269	209	150	94	42	9	1	cd
100%	99%	98%	96%	93%	89%	84%	78%	72%	66%	59%	51%	43%	36%	28%	20%	12%	6%	1%	0%	of 0°val

Intensities in 180° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°	γ
755	751	741	723	698	669	633	592	546	496	442	386	327	267	207	148	92	42	8	0	cd
100%	100%	98%	96%	93%	89%	84%	78%	72%	66%	59%	51%	43%	35%	27%	20%	12%	6%	1%	0%	of 0°val

Intensities in 270° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°	γ
755	751	740	722	698	668	633	592	546	496	443	386	328	269	209	150	94	42	9	1	cd
100%	99%	98%	96%	93%	89%	84%	78%	72%	66%	59%	51%	43%	36%	28%	20%	12%	6%	1%	0%	of 0°val

Light Measurement Report

Print date: 11-2-2025

Measurement date and time: 10-2-2025 17:10:27 – Measurement no. VFR-250210-3343-MS

Measurement tracking No. and Link: [VT250210-001499](#)

Operator:



Light Planning – UGR table

Uncorrected, comprehensive UGR table according to 117-1995

Reflectances											
	ρ Ceiling	70	70	50	50	30	70	70	50	50	30
	ρ Walls	50	30	50	30	30	50	30	50	30	30
	ρ Floor	20	20	20	20	20	20	20	20	20	20
Room size		Viewed Crosswise					Viewed Endwise				
H = mounting height above eye level		(Viewing direction orthogonal to lamp length axis)					(Viewing direction parallel to lamp length axis)				
X	Y										
2H	2H	21,4	22,7	21,7	23,0	23,2	21,4	22,7	21,7	23,0	23,2
	3H	22,9	24,1	23,3	24,4	24,6	22,9	24,2	23,3	24,5	24,7
	4H	23,5	24,7	23,9	25,0	25,2	23,5	24,7	23,9	25,0	25,3
	6H	24,0	25,1	24,3	25,4	25,7	24,1	25,1	24,4	25,4	25,8
	8H	24,1	25,2	24,5	25,5	25,9	24,2	25,2	24,5	25,5	26,0
	12H	24,2	25,2	24,6	25,6	26,0	24,3	25,3	24,6	25,6	26,1
4H	2H	22,0	23,2	22,4	23,5	23,8	22,0	23,3	22,5	23,5	23,8
	3H	23,8	24,8	24,2	25,1	25,6	23,8	24,8	24,2	25,2	25,6
	4H	24,4	25,4	24,9	25,8	26,3	24,5	25,4	24,9	25,8	26,4
	6H	25,0	25,9	25,5	26,3	26,6	25,1	26,0	25,6	26,3	26,7
	8H	25,2	26,0	25,7	26,4	26,8	25,3	26,1	25,8	26,4	26,8
	12H	25,3	26,0	25,8	26,4	26,9	25,4	26,1	25,9	26,5	27,0
8H	4H	24,7	25,5	25,3	25,9	26,3	24,8	25,6	25,3	26,0	26,3
	6H	25,5	26,1	26,0	26,6	27,1	25,5	26,1	26,0	26,6	27,2
	8H	25,8	26,3	26,3	26,8	27,5	25,8	26,4	26,3	26,9	27,5
	12H	25,9	26,4	26,5	26,9	27,5	26,0	26,5	26,6	27,0	27,6
12H	4H	24,8	25,4	25,3	25,9	26,3	24,8	25,5	25,3	25,9	26,4
	6H	25,5	26,1	26,1	26,6	27,3	25,6	26,1	26,1	26,7	27,3
	8H	25,9	26,3	26,4	26,8	27,4	25,9	26,4	26,5	26,9	27,5
Variations with the observer position for the luminaire spacings, S:											
S = 1.0H		0,1 / -0,1					0,1 / -0,1				
S = 1.5H		0,1 / -0,2					0,1 / -0,2				
S = 2.0H		0,4 / -0,5					0,4 / -0,5				

Coefficients of Utilization

Ceiling reflectance	80			70			50			30			10			0		
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR		(RCR: Room Cavity Ratio)			Room Values are expressed as percentage of Lumen delivered to the task surface													
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	108	104	99	95	106	101	97	94	97	94	91	93	90	88	89	87	85	83
2	99	90	83	77	96	88	82	76	85	79	75	81	77	73	78	74	71	69
3	90	79	71	64	87	77	70	64	74	68	62	72	66	61	69	64	60	58
4	82	70	61	54	80	69	60	54	66	59	53	64	57	52	61	56	52	49
5	75	62	53	47	73	61	53	46	59	52	46	57	51	45	55	49	45	43
6	70	56	47	41	68	55	47	41	53	46	40	52	45	40	50	44	39	37
7	65	51	42	36	63	50	42	36	49	41	35	47	40	35	46	40	35	33
8	60	46	38	32	59	46	38	32	44	37	32	43	36	31	42	36	31	29
9	56	43	34	29	55	42	34	29	41	34	29	40	33	28	39	33	28	26
10	53	39	31	26	51	39	31	26	38	31	26	37	30	26	36	30	26	24

Light Measurement Report


Print date: 11-2-2025
Measurement date and time: 10-2-2025 17:10:27 – Measurement no. VFR-250210-3343-MS
Measurement tracking No. and Link: [VT250210-001499](#)
Operator:



Luminaire budgetary diagram

Uncorrected, comprehensive UGR table according to 117-1995

LAMPS (number of lamps)

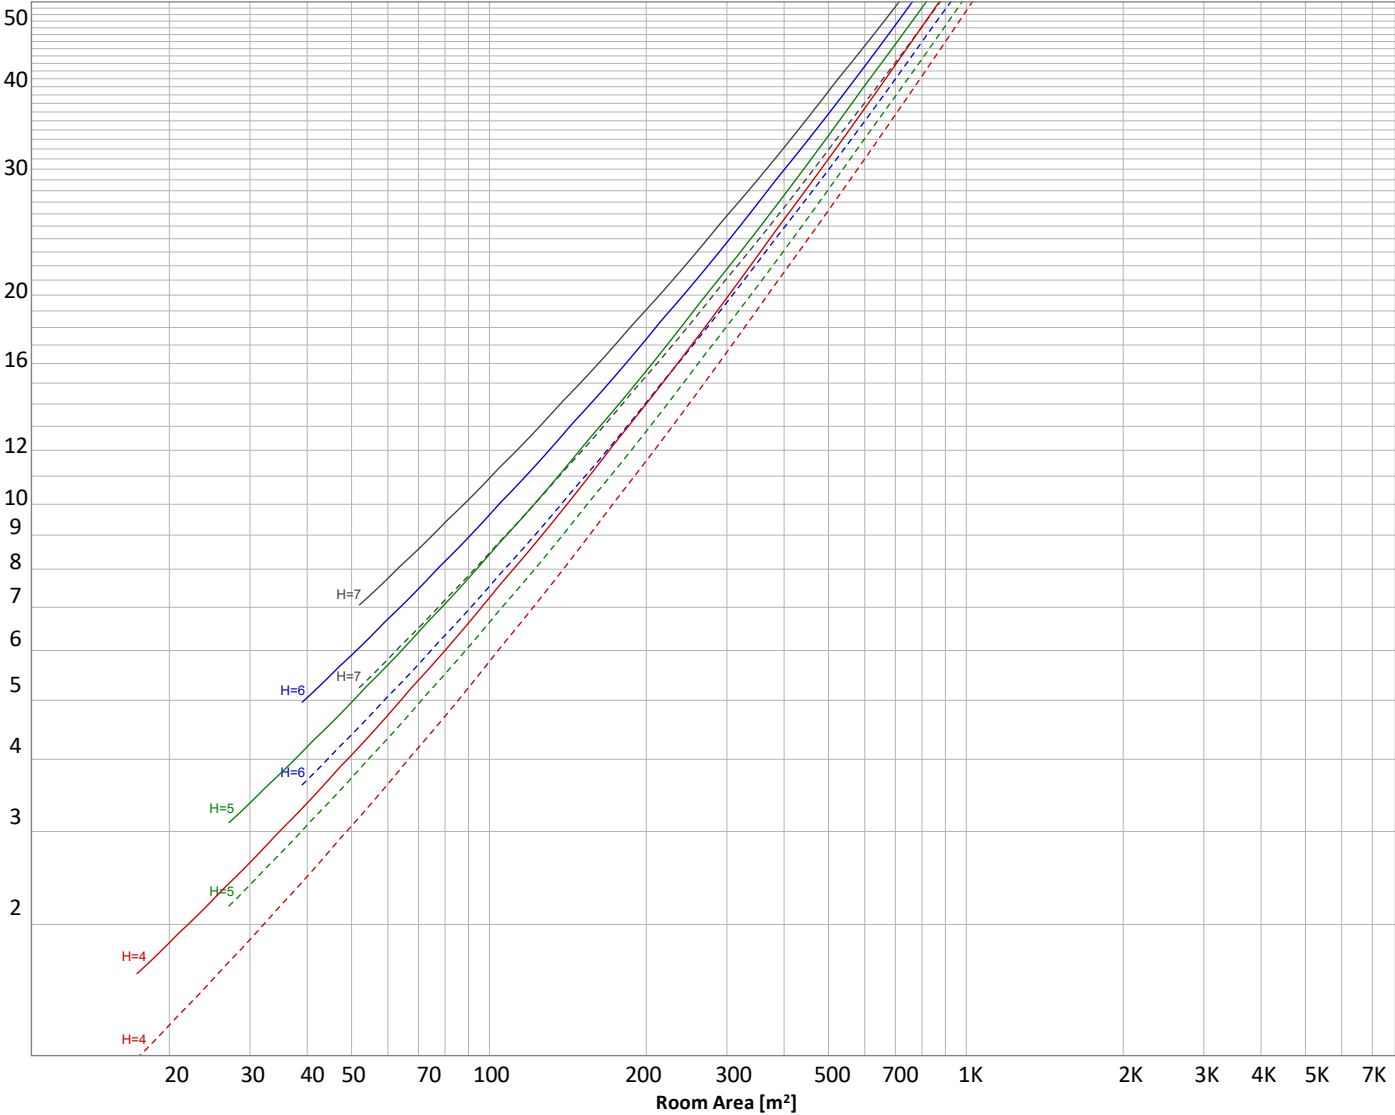

Conditions

H = Room height	Flux = 2157 lm	p(%)		
H _{down} = Lamp distance from ceiling =	0.00 m	Line type	Ceiling reflectance	Wall reflectance
H _{work} = Work area height from floor =	0.00 m	-----	70	50
E _{work} = Average lux on work area =	100 lx	-----	50	30
				Floor reflectance
				20

Zonal Lumen Summary

0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
71,4 lm	204 lm	308 lm	370 lm	383 lm	345 lm	265 lm	157 lm	47,2 lm
90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
1,21 lm	0,682 lm	0,795 lm	0,898 lm	0,893 lm	0,813 lm	0,684 lm	0,445 lm	0,160 lm

Light Measurement Report

Print date: 11-2-2025

Measurement date and time: 10-2-2025 17:10:27 – Measurement no. VFR-250210-3343-MS

Measurement tracking No. and Link: [VT250210-001499](#)

Operator:



Outdoor Light Planning

Lumen per Zone

Zone (γ)	Lumen	% Total
0-10°	71 lm	3,3%
10-20°	204 lm	9,5%
20-30°	308 lm	14,3%
30-40°	370 lm	17,2%
40-50°	383 lm	17,7%
50-60°	345 lm	16,0%
60-70°	265 lm	12,3%
70-80°	157 lm	7,3%
80-90°	47 lm	2,2%
90-100°	1 lm	0,1%
100-110°	1 lm	0,0%
110-120°	1 lm	0,0%
120-130°	1 lm	0,0%
130-140°	1 lm	0,0%
140-150°	1 lm	0,0%
150-160°	1 lm	0,0%
160-170°	0 lm	0,0%
170-180°	0 lm	0,0%
Total	2157 lm	100,0%

Intensity peaks

Max intensity	756 cd
Intensity, 90°	8 cd
Intensity, 0°	755 cd

Zonal Lumen summary


Zone (γ)	Lumen	% Total
0-30°	584 lm	27,0%
0-40°	954 lm	44,2%
0-60°	1682 lm	77,9%
60-90°	469 lm	21,8%
70-100°	206 lm	9,5%
90-120°	3 lm	0,1%
0-90°	2151 lm	99,7%
90-180°	7 lm	0,3%
0-180°	2157 lm	100,0%

BUG rating

	Lumen	% Total
Forward light		
Low(0-30°)	292 lm	13,5%
Medium(30-60°)	549 lm	25,4%
High(60-80°)	211 lm	9,8%
Very high(80-90°)	24 lm	1,1%
Back light		
Low(0-30°)	292 lm	13,5%
Medium(30-60°)	549 lm	25,4%
High(60-80°)	211 lm	9,8%
Very high(80-90°)	24 lm	1,1%
Uplight		
Low(90-100°)	2 lm	0,1%
High(100-180°)	5 lm	0,2%

IESNA TM-15-07 Luminaire Classification System For Outdoor Luminaires

BUG rating B1 U1 G1

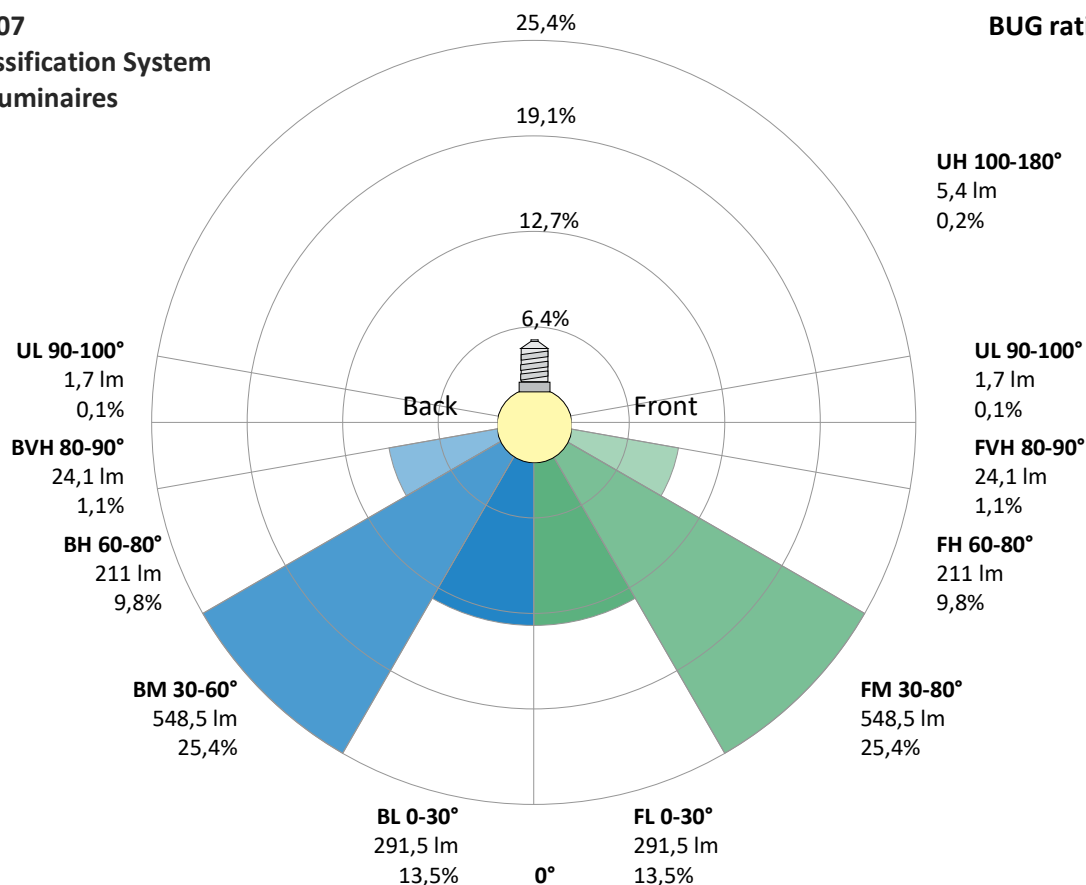

Light Measurement Report

Print date: 11-2-2025
Measurement date and time: 10-2-2025 17:10:27 – Measurement no. VFR-250210-3343-MS
Measurement tracking No. and Link: [VT250210-001499](#)
Operator:




Power Details


Input Power

Power feed to light source	23,8 W
Frequency of input power	50 Hz
RMS Input voltage feed, V_{RMS}	230 V
RMS Input current feed, I_{RMS}	0,109 A
Volt-Ampere or apparent power = $V_{RMS} * I_{RMS}$	25,03 VA
Displacement factor of AC power feed	0,98
Power factor of AC current feed	0,95
Total harmonic distortion of the current	23,6%
Total harmonic distortion of the voltage	0,07%

Input Power Curve

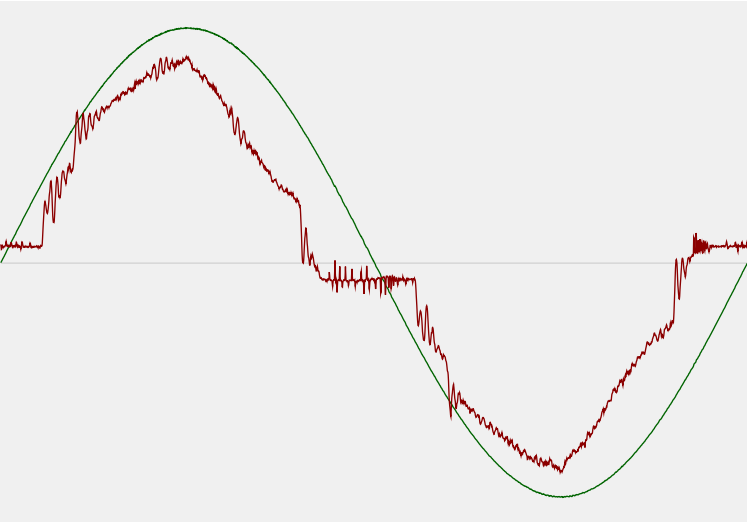

Efficiency

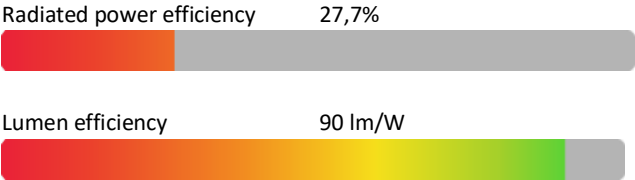

Stabilization Details

Warmup Conditions

Stable period	15 min
Stable change max	2,0%
Minimum time	15 min

Color Temperature Change

CCT start	4996 K
CCT shift	+4 K
CCT end	5000 K


Warmup Result

Total warmup time	Lamp stabilized in 15 min 1 sec
Warmup variation	-0,2%

Output Change

Output start	2161 lm
Output change	-3 lm
Output end	2157 lm

Stabilization Curve

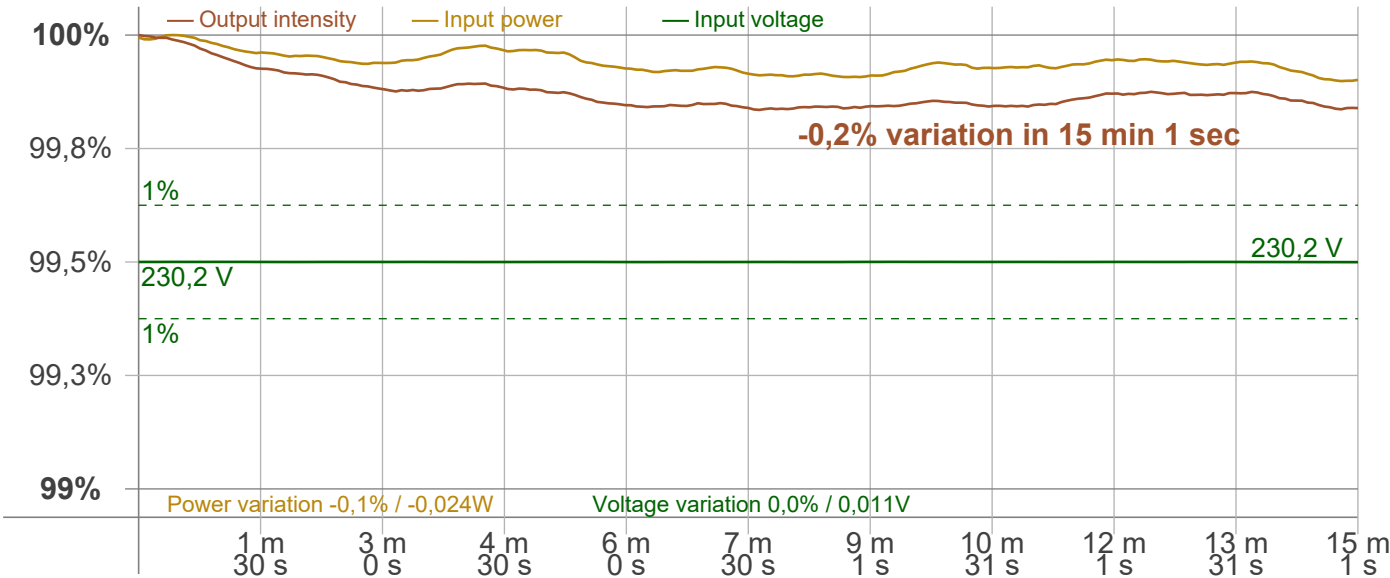

Light Measurement Report

Print date: 11-2-2025
Measurement date and time: 10-2-2025 17:10:27 – Measurement no. VFR-250210-3343-MS
Measurement tracking No. and Link: [VT250210-001499](#)
Operator:



Flicker /TLA details

Flicker Meter Type Viso Systems LabFlicker
Frequency of input power 50 Hz
Flicker/TLA sample rate 20000 samples/s

Measurement time
PstLM 180 sec
All other indices 1,2 sec


Flicker indices according to Illuminating Engineering Society (IES)
Flicker frequency 100 Hz
Percent Flicker 30,08 %
Flicker index 0,09

Flicker indices according to California Energy Commission (CEC) 2016b
JA8/10 40 Hz 0,13 %
JA8/10 90 Hz 0,3 %
JA8/10 200 Hz 29,78 %
JA8/10 400 Hz 30,03 %
JA8/10 1000 Hz 30,1 %


TLA indices (re IEC TR 61547-1, IEC 61000-3-3 and IEC 61000-4-15)
PstLM value (F < 80 Hz) 0,11
SVM value (80 < F < 2000 Hz) 1,15

Flicker indices according to Lighting Research Center (2015)
Perception metric, Assist Mp 0,08

Flicker frame (frame of one flicker period in time domain)

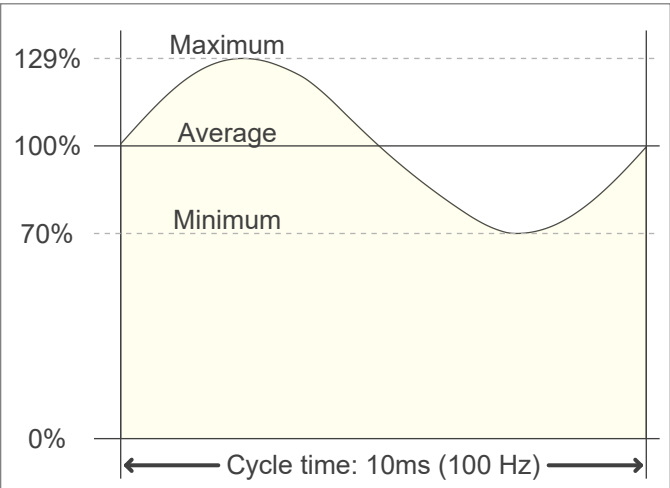

Flicker FFT (flicker curve in frequency domain)

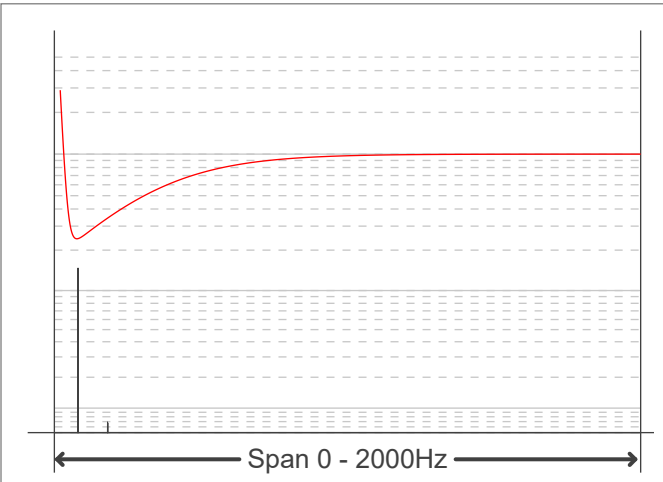

IEEE 1789 Frequency/modulation plot

