

Light Measurement Report

Print date: 16-5-2025

Measurement date and time: 16-5-2025 11:42:49 – Measurement no. VFR-250516-1296-MS

Measurement tracking No. and Link: [VT250516-008514](#)

Operator:



Laboratory and Equipment

Laboratory Owner and Location
Goniospectrometer System and Type
Sensor Name, Calibr. Date and Serial No.
Spectrometer Manufacturer and Model

Viso Systems, Copenhagen V, Denmark
LabSpion – Type C, horizontal
LabSensor Model2 – 11-1-2024 – 3130191315
Ibsen Photonics, Denmark – Freedom VIS (Custom Viso)

Measurement Conditions

Number of C-planes and Resolution
 γ (gamma)-Resolution
Test Distance
Input Power, Power and Displ. Factors
Input RMS Voltage and Current
Frequency of Input Power
Warm-up Time and Variation

16 planes – 22,5°
5°
2,57 m
41,0 W – PF 0,97 – DPF 0,99
230 V – 0,183 A
50 Hz
Lamp stabilized in 19 min 6 sec – 2,0%

Tested Light Source



Product Name
Item No. and Manufacturer
Product Description (line 1)

RPD-W40-4000K
RPD-W40-4000K – Dutchfulfillment
3-FASE RAILSPOT 38° WIT 40W DIMBAAR CRI>97

Main Light Measurement Results

Output – Total Lumen (Up% / Down%)
Efficiency
Peak Intensity and Beam Angle
Correlated Color Temperature, Target/Measured
Color Rendering Index
Color Rendering TM30-18
Color Shift, CIE duv and MacAdam Steps
Flicker

3410 lm – 0,08% / 99,92%
83 lm/W
6850 cd – 32,6°
CCT = 4000 K / 4057 K
CRI 97,3
 R_f 92,4 – R_g 99,2
Duv 0,0011 – SDCM 1,4
SVM 0,03 – PstLM 0,33

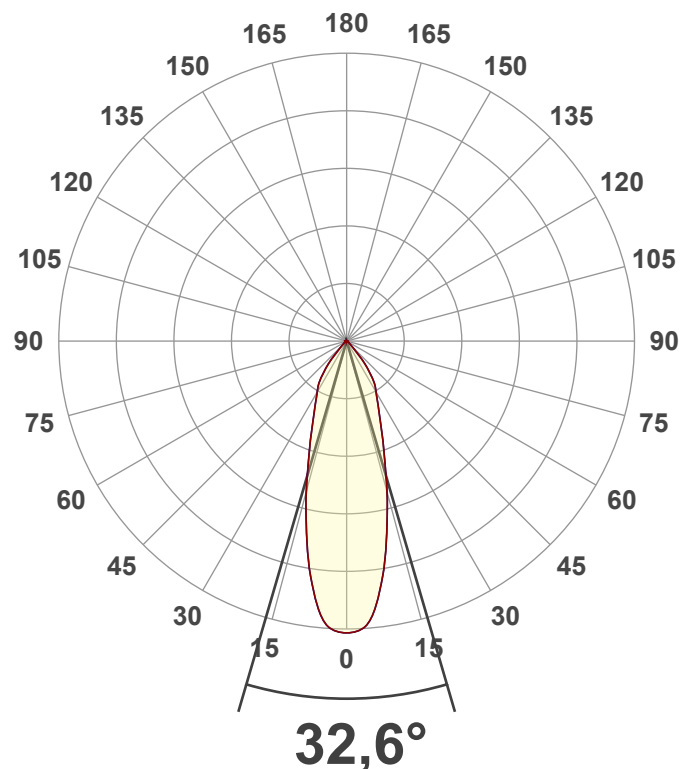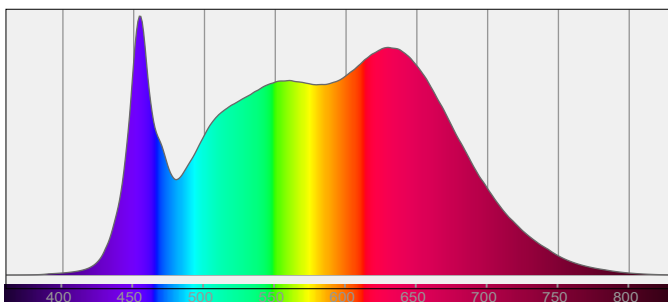

Light Measurement Report

Print date: 16-5-2025

Measurement date and time: 16-5-2025 11:42:49 – Measurement no. VFR-250516-1296-MS


Measurement tracking No. and Link: [VT250516-008514](#)

Operator:



Luminous Intensity diagram

Unit: 0-100% of peak intensity

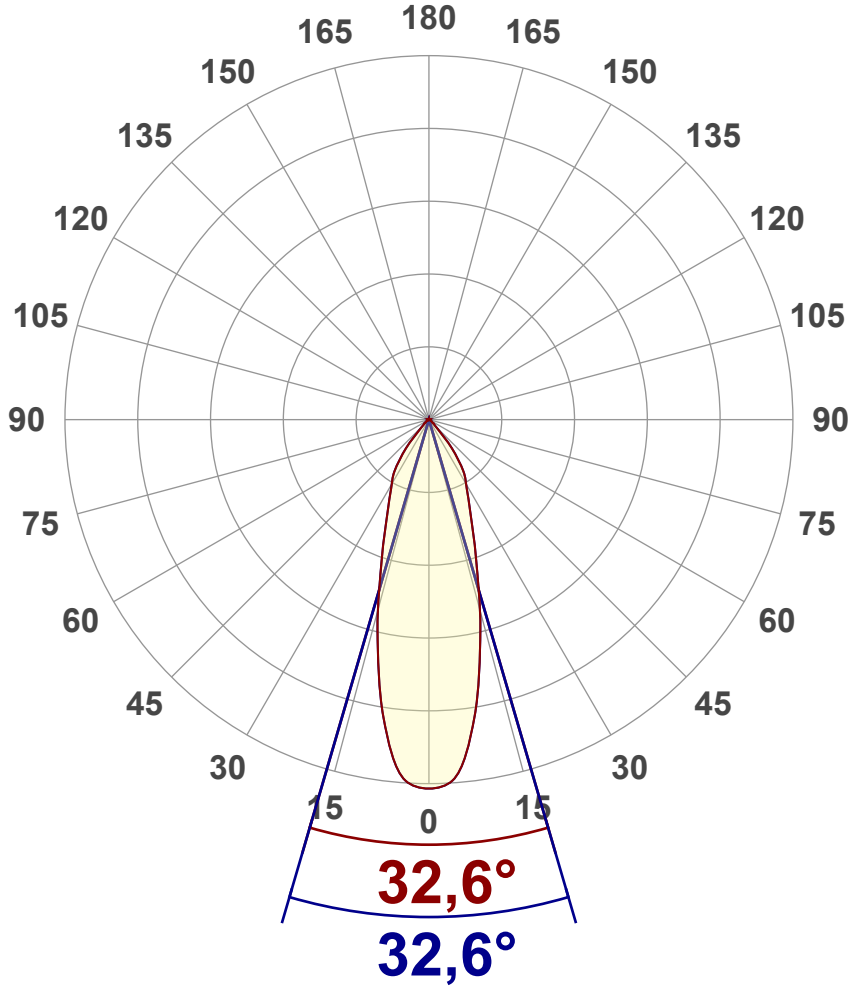

Main Values

Output (total Lumen)	3410 lm
Lumen Up% / Down%	0,08% / 99,92%
Peak Intensity	6850 cd
Beam Angle (50%)	32,6°
Beam Angle (90%)	32,6°
Beam Angle (10%)	32,6°

Cut-off Angle

Average 2,5%	91,1°
--------------	-------

Field Angle

Average 10%	77,6°
-------------	-------


Intensity Ratio

In 120° cone	97,9%
In 90° cone	94,8%

C000-C180

C090-C270

Linear distribution diagram - Intensity (candela) vs γ -angle

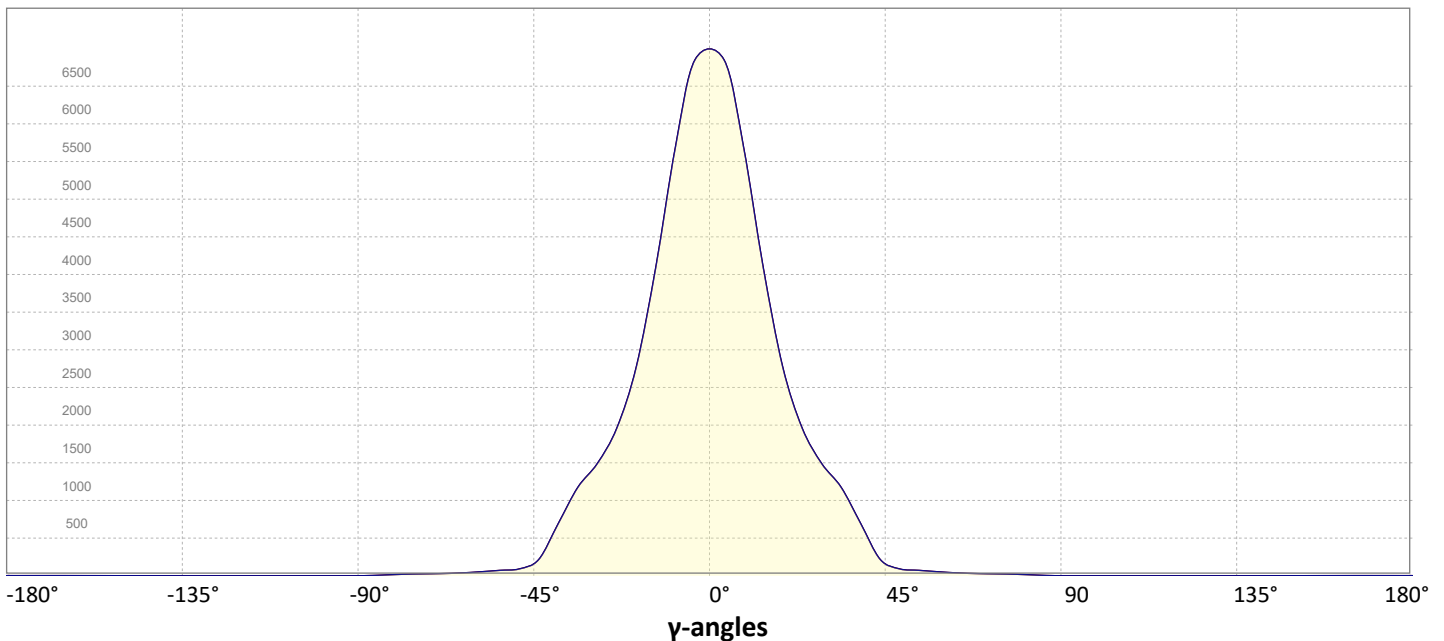

Light Measurement Report

Print date: 16-5-2025


Measurement date and time: 16-5-2025 11:42:49 – Measurement no. VFR-250516-1296-MS

Measurement tracking No. and Link: [VT250516-008514](#)

Operator:



Iso-intensity Diagram (Iso-candela)

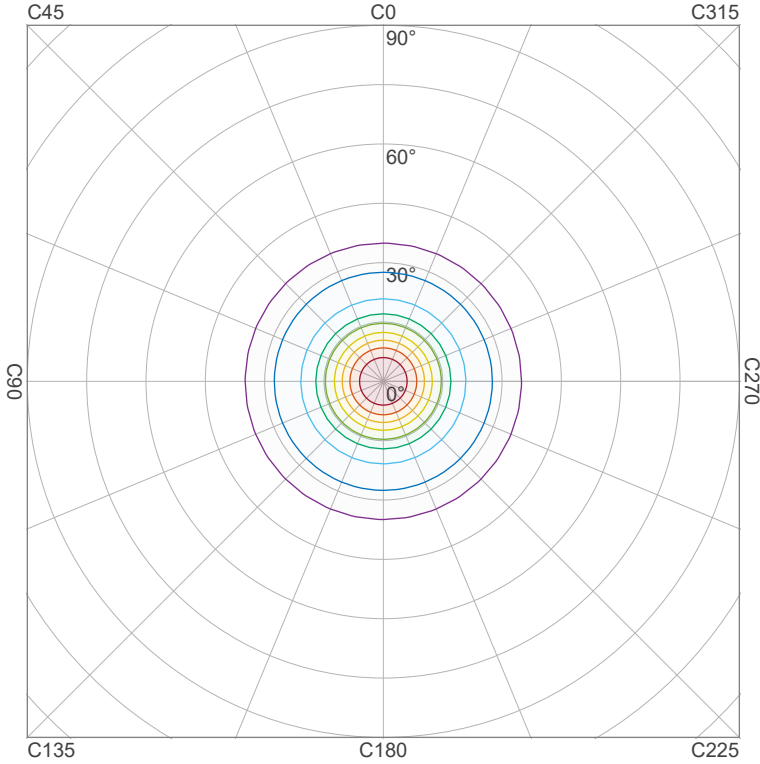


90 %	6165,1 cd
80 %	5480,1 cd
70 %	4795,1 cd
60 %	4110,1 cd
50 %	3425,1 cd
40 %	2740,1 cd
30 %	2055,0 cd
20 %	1370,0 cd
10 %	685,0 cd

Peak intensity: 6850,1 cd

Number of c-planes: 16

Iso-illuminance Diagram (Iso-lux)

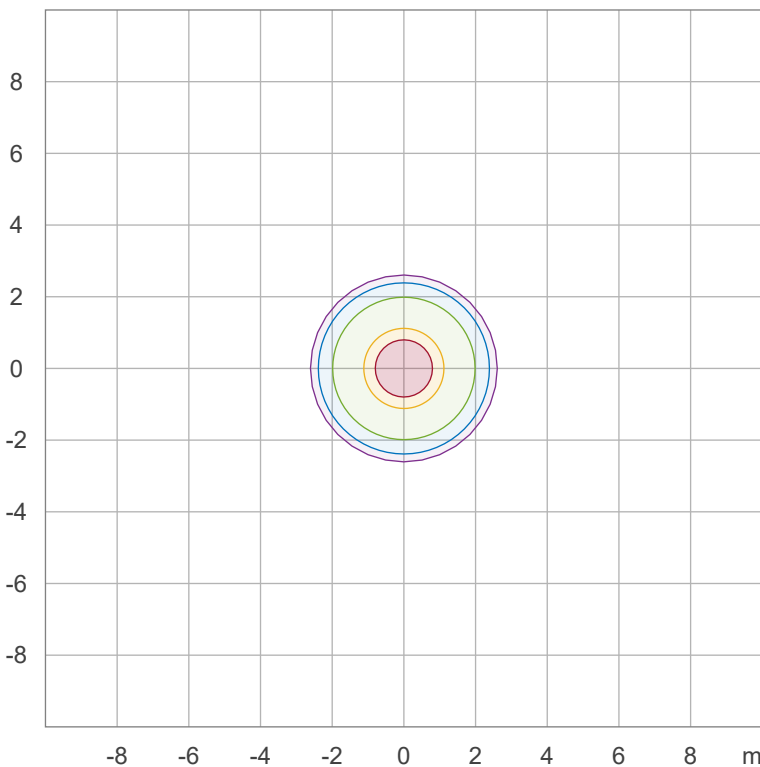

50,0 %	380,6 lx
30,0 %	228,3 lx
10,0 %	76,1 lx
5,0 %	38,1 lx
3,0 %	22,8 lx

Peak illuminance: 761,1 lx

Mounting height: 3,0 m

Number of c-planes: 16

Light Measurement Report

Print date: 16-5-2025

Measurement date and time: 16-5-2025 11:42:49 – Measurement no. VFR-250516-1296-MS

Measurement tracking No. and Link: [VT250516-008514](#)

Operator:



Color details


Correlated Color Temperature, Target CCT = 4000 K
 Correlated Color Temperature, Measured CCT = 4057 K
 Color Rendering Index CRI 97,3
 Color Rendering Index, R9 (red component) R9 = 95,8
 Color Rendering TM30-18 R_f 92,4 – R_g 99,2
 Color Quality Scale CQS = 95,1

MacAdam Steps SDCM = 1,4
 Color coordinates CIE 1931 (x;y) = (0,381;0,377)
 Color coordinate CIEs 1960 (u;v) = (0,225;0,334)
 Color deviation from BBL Duv = 0,0011
 Color coordinate CIEs 1976 (CIELUV) (u';v') = (0,225;0,502)


CIE 1931



CIE 1931 – zoomed on Planckian locus

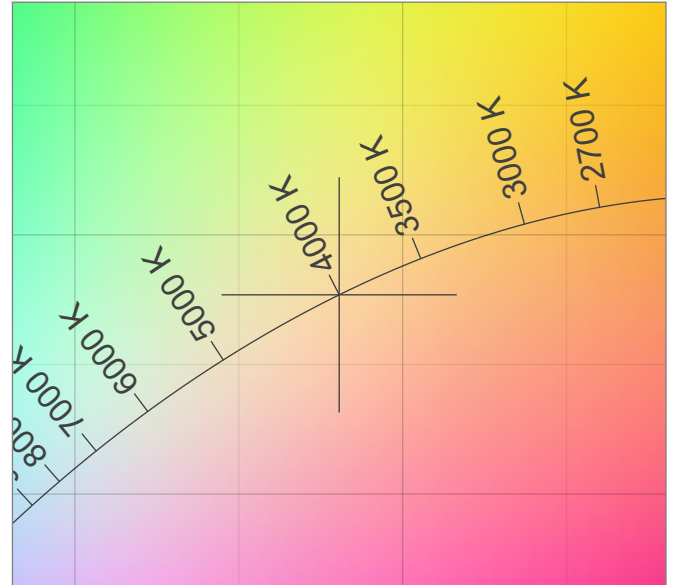


Color Rendering Index per reference color (CIE 1995)

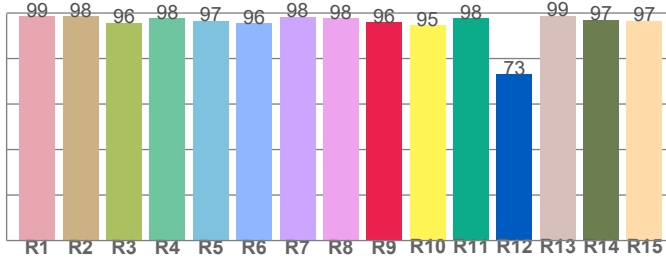


CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
98,6	98,5	95,7	97,7	96,5	95,5	98,4	97,7	95,8	94,6	97,8	73,1	98,7	97,1	96,6

Spectral power distribution (SPD) / W/nm – 0-100%

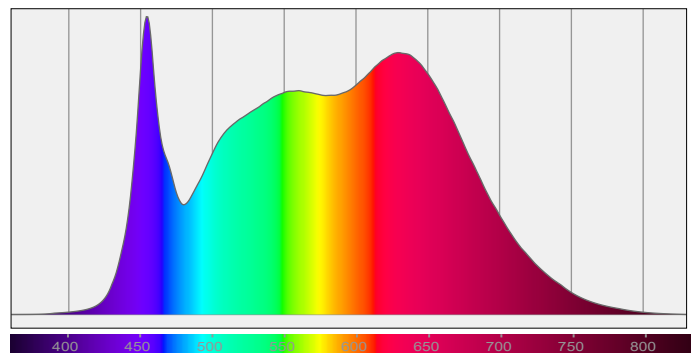


TM30-18 Rf-values per hue bin

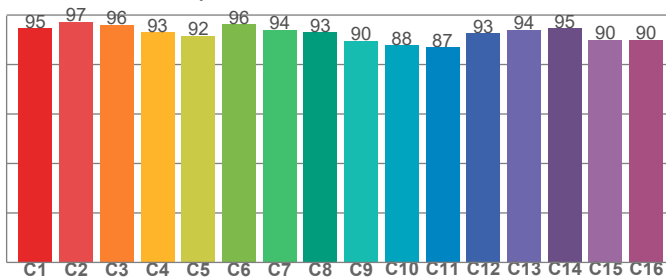

TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
94,7	97,3	96,1	93,1	91,7	96,3	94,0	92,9	89,6	87,7	86,9	92,7	94,0	94,8	89,9	90,0

Color Quality Scale by reference color

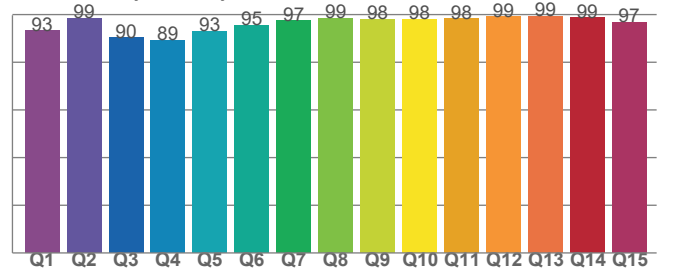

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
93,2	98,5	90,2	89,3	93,0	95,5	97,4	98,6	98,2	98,1	98,4	99,1	99,3	98,7	96,8

Light Measurement Report

Print date: 16-5-2025


Measurement date and time: 16-5-2025 11:42:49 – Measurement no. VFR-250516-1296-MS

Measurement tracking No. and Link: [VT250516-008514](https://www.viso-systems.com/VT250516-008514)

Operator:



Beam Details

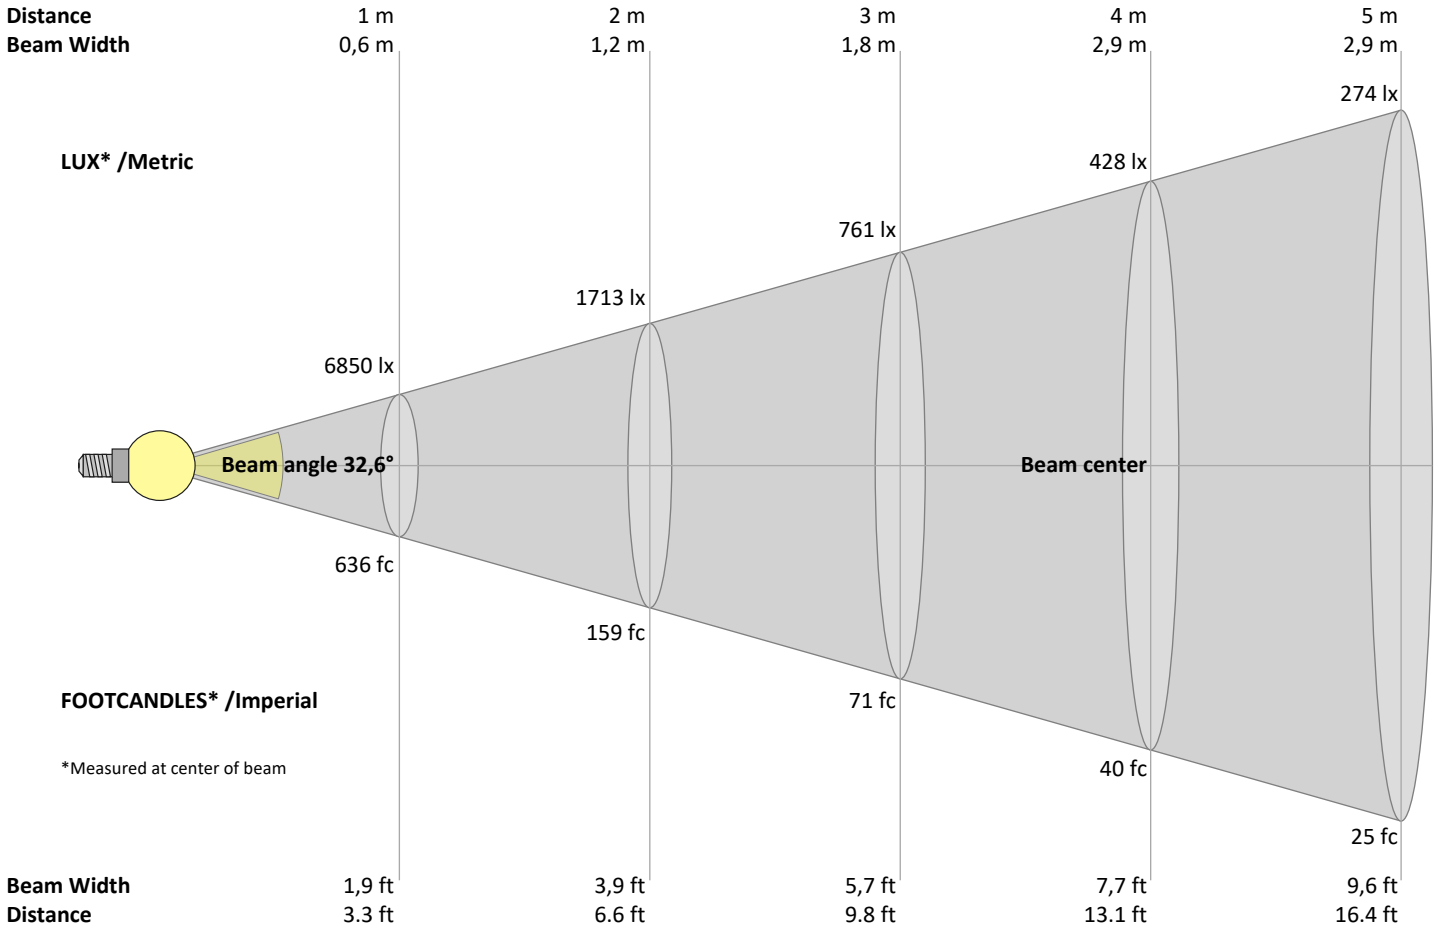

Beam intensities from 1 – 20 m

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	m
3,3	6,6	9,8	13,1	16,4	19,7	23	26,2	29,5	32,8	36,1	39,4	42,7	45,9	49,2	52,5	55,8	59,1	62,3	65,6	ft
6850	1713	761	428	274	190	140	107	85	69	57	48	41	35	30	27	24	21	19	17	lux
636,4	159,1	70,7	39,8	25,5	17,7	13	9,9	7,9	6,4	5,3	4,4	3,8	3,2	2,8	2,5	2,2	2	1,8	1,6	fc

Intensities in 0° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°	γ
6850	6850	6785	6322	5859	5286	4651	4031	3501	2970	2570	2243	1936	1747	1559	1410	1283	1147	955	763	cd
100%	100%	99%	92%	86%	77%	68%	59%	51%	43%	38%	33%	28%	26%	23%	21%	19%	17%	14%	11%	of 0°val

Intensities in 90° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°	γ
6850	6850	6785	6322	5859	5286	4651	4031	3501	2970	2570	2243	1936	1747	1559	1410	1283	1147	955	763	cd
100%	100%	99%	92%	86%	77%	68%	59%	51%	43%	38%	33%	28%	26%	23%	21%	19%	17%	14%	11%	of 0°val

Intensities in 180° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°	γ
6850	6850	6785	6322	5859	5286	4651	4031	3501	2970	2570	2243	1936	1747	1559	1410	1283	1147	955	763	cd
100%	100%	99%	92%	86%	77%	68%	59%	51%	43%	38%	33%	28%	26%	23%	21%	19%	17%	14%	11%	of 0°val

Intensities in 270° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°	γ
6850	6850	6785	6322	5859	5286	4651	4031	3501	2970	2570	2243	1936	1747	1559	1410	1283	1147	955	763	cd
100%	100%	99%	92%	86%	77%	68%	59%	51%	43%	38%	33%	28%	26%	23%	21%	19%	17%	14%	11%	of 0°val

Light Measurement Report

Print date: 16-5-2025

Measurement date and time: 16-5-2025 11:42:49 – Measurement no. VFR-250516-1296-MS

Measurement tracking No. and Link: [VT250516-008514](#)

Operator:



Light Planning – UGR table

Uncorrected, comprehensive UGR table according to 117-1995

Reflectances		70	70	50	50	30	70	70	50	50	30
	ρ Ceiling	70	70	50	50	30	70	70	50	50	30
	ρ Walls	50	30	50	30	30	50	30	50	30	30
	ρ Floor	20	20	20	20	20	20	20	20	20	20
Room size		Viewed Crosswise					Viewed Endwise				
H = mounting height above eye level		(Viewing direction orthogonal to lamp length axis)					(Viewing direction parallel to lamp length axis)				
X	Y										
2H	2H	21,0	21,7	21,1	21,9	22,1	21,0	21,7	21,1	21,9	22,1
	3H	20,9	21,6	21,2	21,8	22,0	20,9	21,6	21,2	21,8	22,0
	4H	20,9	21,6	21,2	21,8	22,0	20,9	21,6	21,2	21,8	22,0
	6H	20,9	21,5	21,2	21,8	22,2	20,9	21,5	21,2	21,8	22,2
	8H	20,9	21,5	21,2	21,8	22,2	20,9	21,5	21,2	21,8	22,2
	12H	20,9	21,4	21,2	21,8	22,2	20,9	21,4	21,2	21,8	22,2
4H	2H	20,7	21,5	21,1	21,7	21,9	20,7	21,5	21,1	21,7	21,9
	3H	20,8	21,4	21,1	21,7	22,1	20,8	21,4	21,1	21,7	22,1
	4H	20,8	21,3	21,2	21,7	22,2	20,8	21,3	21,2	21,7	22,2
	6H	20,8	21,4	21,3	21,7	22,0	20,8	21,4	21,3	21,7	22,0
	8H	20,8	21,3	21,3	21,6	22,0	20,8	21,3	21,3	21,6	22,0
	12H	20,8	21,2	21,3	21,6	22,0	20,8	21,2	21,3	21,6	22,0
8H	4H	20,7	21,2	21,2	21,6	21,9	20,7	21,2	21,2	21,6	21,9
	6H	20,8	21,1	21,3	21,6	22,1	20,8	21,1	21,3	21,6	22,1
	8H	20,9	21,1	21,4	21,6	22,3	20,9	21,1	21,4	21,6	22,3
	12H	20,8	21,1	21,4	21,6	22,2	20,8	21,1	21,4	21,6	22,2
12H	4H	20,6	21,0	21,1	21,5	21,9	20,6	21,0	21,1	21,5	21,9
	6H	20,8	21,1	21,3	21,6	22,2	20,8	21,1	21,3	21,6	22,2
	8H	20,8	21,0	21,4	21,6	22,2	20,8	21,0	21,4	21,6	22,2

Variations with the observer position for the luminaire spacings, S:

S = 1.0H	3,8 / -4,6	3,8 / -4,6
S = 1.5H	6,3 / -5,2	6,3 / -5,2
S = 2.0H	8,2 / -5,7	8,2 / -5,7

Coefficients of Utilization

Ceiling reflectance	80			70			50			30			10			0		
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio)																	
	Room Values are expressed as percentage of Lumen delivered to the task surface																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	111	108	106	111	109	106	104	105	103	101	101	99	98	97	96	95	93
2	108	103	99	96	106	102	98	95	98	95	93	95	93	91	93	91	89	87
3	103	97	92	88	101	95	91	87	93	89	86	90	87	84	88	85	83	82
4	98	91	85	81	96	90	85	81	87	83	80	85	82	79	84	81	78	77
5	93	85	80	76	92	85	79	75	83	78	75	81	77	74	80	76	73	72
6	89	81	75	71	88	80	75	71	78	74	70	77	73	70	76	72	69	68
7	85	76	71	67	84	76	70	66	74	70	66	73	69	66	72	68	65	64
8	82	72	67	63	80	72	67	63	71	66	63	70	65	62	69	65	62	61
9	78	69	63	60	77	68	63	59	68	63	59	67	62	59	66	62	59	58
10	75	66	60	57	74	65	60	57	65	60	56	64	59	56	63	59	56	55

Light Measurement Report

Print date: 16-5-2025

Measurement date and time: 16-5-2025 11:42:49 – Measurement no. VFR-250516-1296-MS

Measurement tracking No. and Link: [VT250516-008514](#)


Operator:



Luminaire budgetary diagram

Uncorrected, comprehensive UGR table according to 117-1995

LAMPS (number of lamps)

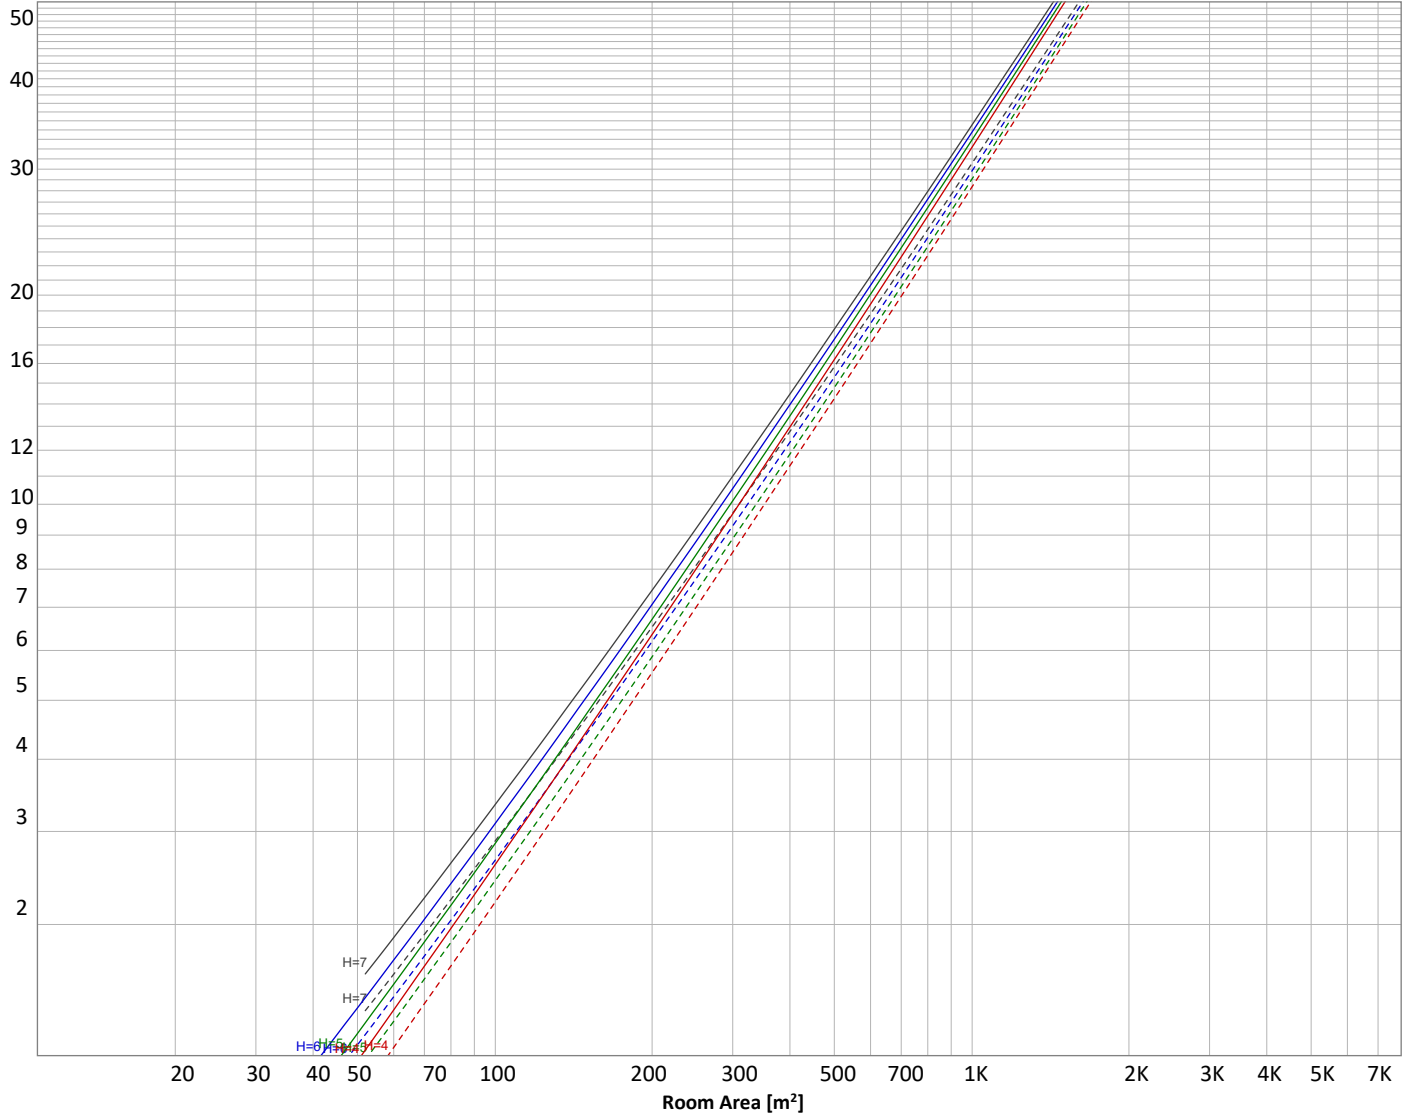

Conditions

H = Room height	Flux = 3410 lm				
H _{down} = Lamp distance from ceiling =	0.00 m	Line type	Ceiling reflectance	ρ(%) Wall reflectance	Floor reflectance
H _{work} = Work area height from floor =	0.00 m	-----	70	50	30
E _{work} = Average lux on work area =	100 lx	—————	50	30	20

Zonal Lumen Summary

0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
586 lm	1032 lm	855 lm	636 lm	170 lm	59,6 lm	35,5 lm	24,3 lm	8,00 lm
90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
0,163 lm	0,002 lm	0,003 lm	0,058 lm	0,215 lm	0,540 lm	0,770 lm	0,653 lm	0,222 lm

Light Measurement Report

Print date: 16-5-2025

Measurement date and time: 16-5-2025 11:42:49 – Measurement no. VFR-250516-1296-MS

Measurement tracking No. and Link: [VT250516-008514](#)

Operator:



Outdoor Light Planning

Lumen per Zone

Zone (γ)	Lumen	% Total
0-10°	586 lm	17,2%
10-20°	1032 lm	30,3%
20-30°	855 lm	25,1%
30-40°	636 lm	18,7%
40-50°	170 lm	5,0%
50-60°	60 lm	1,7%
60-70°	36 lm	1,0%
70-80°	24 lm	0,7%
80-90°	8 lm	0,2%
90-100°	0 lm	0,0%
100-110°	0 lm	0,0%
110-120°	0 lm	0,0%
120-130°	0 lm	0,0%
130-140°	0 lm	0,0%
140-150°	1 lm	0,0%
150-160°	1 lm	0,0%
160-170°	1 lm	0,0%
170-180°	0 lm	0,0%
Total	3410 lm	100,0%

Intensity peaks

Max intensity	6850 cd
Intensity, 90°	1 cd
Intensity, 0°	6850 cd

Zonal Lumen summary


Zone (γ)	Lumen	% Total
0-30°	2473 lm	72,5%
0-40°	3109 lm	91,2%
0-60°	3339 lm	97,9%
60-90°	68 lm	2,0%
70-100°	32 lm	1,0%
90-120°	0 lm	0,0%
0-90°	3407 lm	99,9%
90-180°	3 lm	0,1%
0-180°	3410 lm	100,0%

BUG rating

	Lumen	% Total
Forward light		
Low(0-30°)	1235 lm	36,2%
Medium(30-60°)	434 lm	12,7%
High(60-80°)	30 lm	0,9%
Very high(80-90°)	4 lm	0,1%
Back light		
Low(0-30°)	1235 lm	36,2%
Medium(30-60°)	434 lm	12,7%
High(60-80°)	30 lm	0,9%
Very high(80-90°)	4 lm	0,1%
Uplight		
Low(90-100°)	0 lm	0,0%
High(100-180°)	2 lm	0,1%

IESNA TM-15-07 Luminaire Classification System For Outdoor Luminaires

BUG rating B3 U1 G0

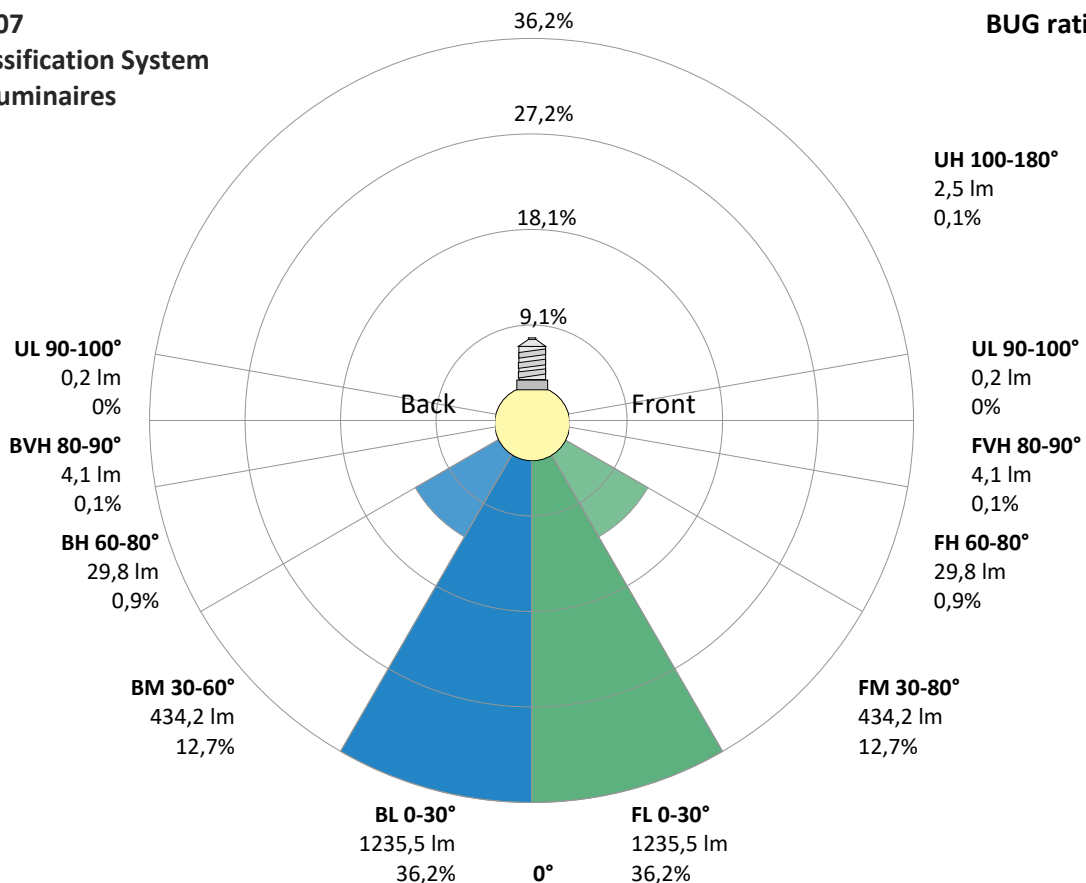

Light Measurement Report

Print date: 16-5-2025

Measurement date and time: 16-5-2025 11:42:49 – Measurement no. VFR-250516-1296-MS

Measurement tracking No. and Link: [VT250516-008514](#)

Operator:




Power Details


Input Power

Power feed to light source	41,0 W
Frequency of input power	50 Hz
RMS Input voltage feed, V_{RMS}	230 V
RMS Input current feed, I_{RMS}	0,183 A
Volt-Ampere or apparent power = $V_{RMS} * I_{RMS}$	42,23 VA
Displacement factor of AC power feed	0,99
Power factor of AC current feed	0,97
Total harmonic distortion of the current	18,34%
Total harmonic distortion of the voltage	0,06%

Input Power Curve

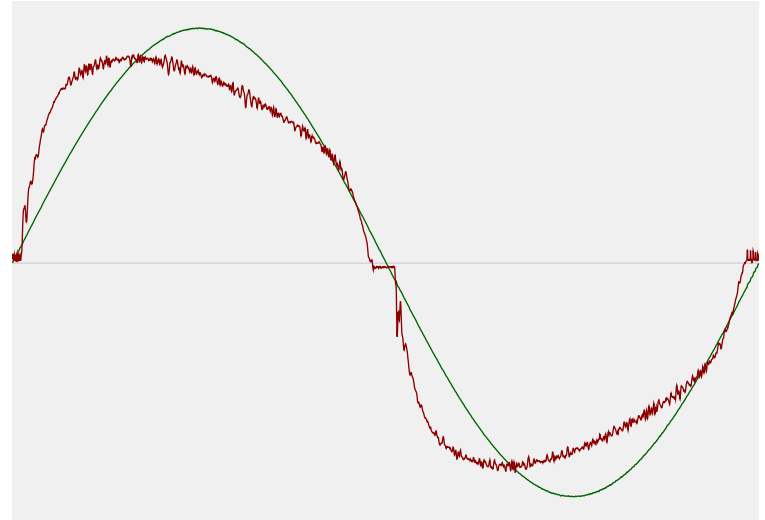

Efficiency

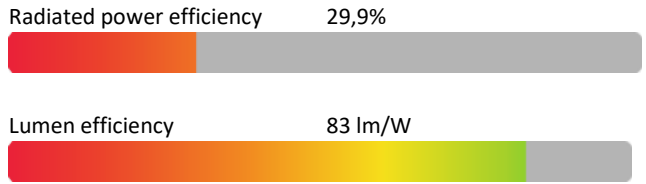

Stabilization Details

Warmup Conditions

Stable period	15 min
Stable change max	2,0%
Minimum time	15 min

Color Temperature Change

CCT start	4007 K
CCT shift	-7 K
CCT end	4000 K


Warmup Result

Total warmup time	Lamp stabilized in 19 min 6 sec
Warmup variation	-3,0%

Output Change

Output start	3513 lm
Output change	-103 lm
Output end	3410 lm

Stabilization Curve

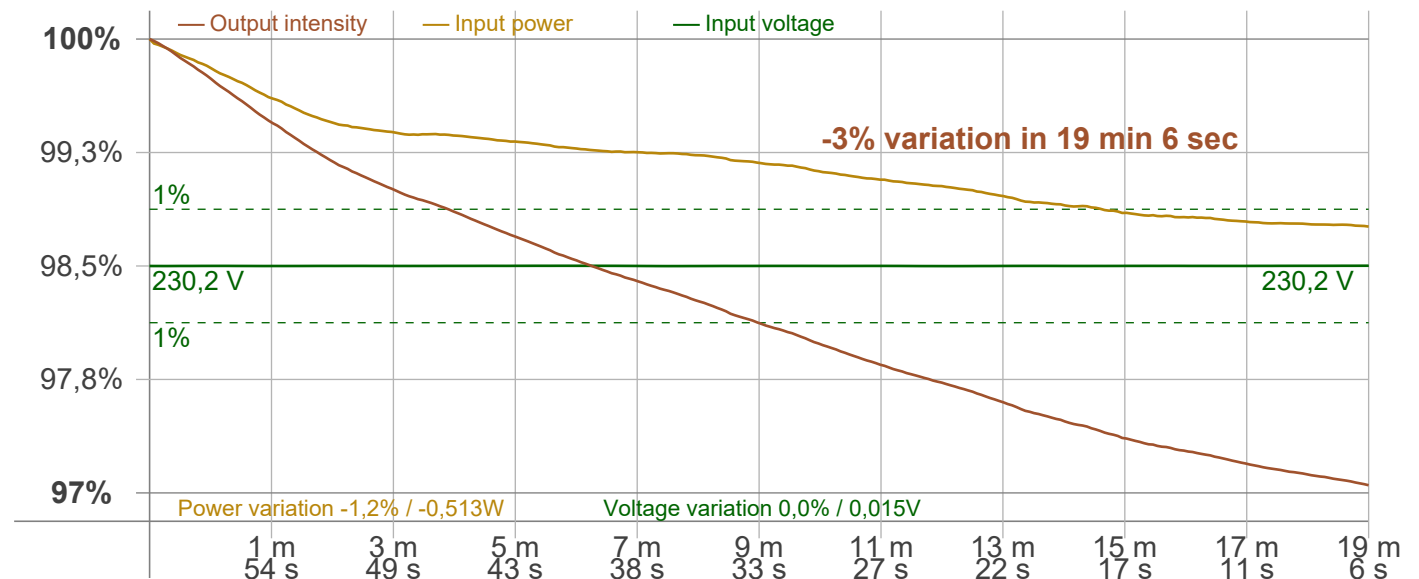

Light Measurement Report

Print date: 16-5-2025

Measurement date and time: 16-5-2025 11:42:49 – Measurement no. VFR-250516-1296-MS

Measurement tracking No. and Link: [VT250516-008514](#)

Operator:



Flicker /TLA details

Flicker Meter Type: Viso Systems LabFlicker
 Frequency of input power: 50 Hz
 Flicker/TLA sample rate: 20000 samples/s

Measurement time
 PstLM: 180 sec
 All other indices: 1,2 sec

Flicker indices according to Illuminating Engineering Society (IES)

Flicker frequency: 97,56 Hz
 Percent Flicker: 1,05 %
 Flicker index: 0

Flicker indices according to California Energy Commission (CEC) 2016b

JA8/10 40 Hz: 0,29 %
 JA8/10 90 Hz: 0,29 %
 JA8/10 200 Hz: 1,04 %
 JA8/10 400 Hz: 1,03 %
 JA8/10 1000 Hz: 1,04 %


TLA indices (re IEC TR 61547-1, IEC 61000-3-3 and IEC 61000-4-15)

PstLM value (F < 80 Hz): 0,33
 SVM value (80 < F < 2000 Hz): 0,03

Flicker indices according to Lighting Research Center (2015)

Perception metric, Assist Mp: 0,22

Flicker frame (frame of one flicker period in time domain)

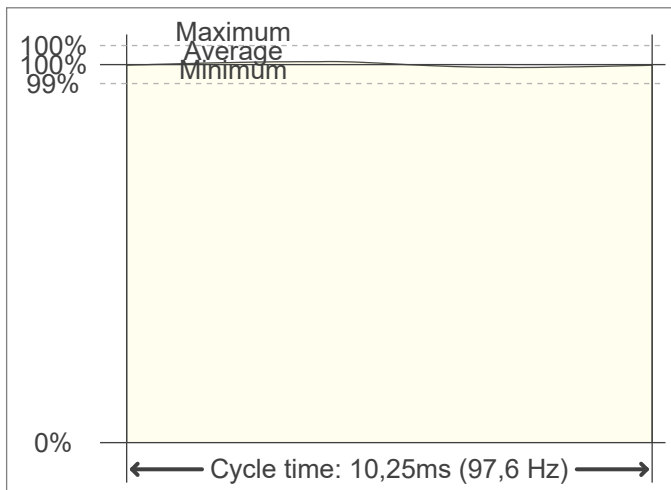

Flicker FFT (flicker curve in frequency domain)



IEEE 1789 Frequency/modulation plot

