

Light efficiency:



Light quality:



Color temperature:



Output: 599 lm

Peak: 106 cd

Power: 5,4 W

PF: 0,55



Tracking number: [VT240926-001597](#)

Product name:

807665-6000K

Item number:


807665-6000K

Date and time:

26-9-2024 14:01:40

Description:

LED E27 LAMP 6W 6000K

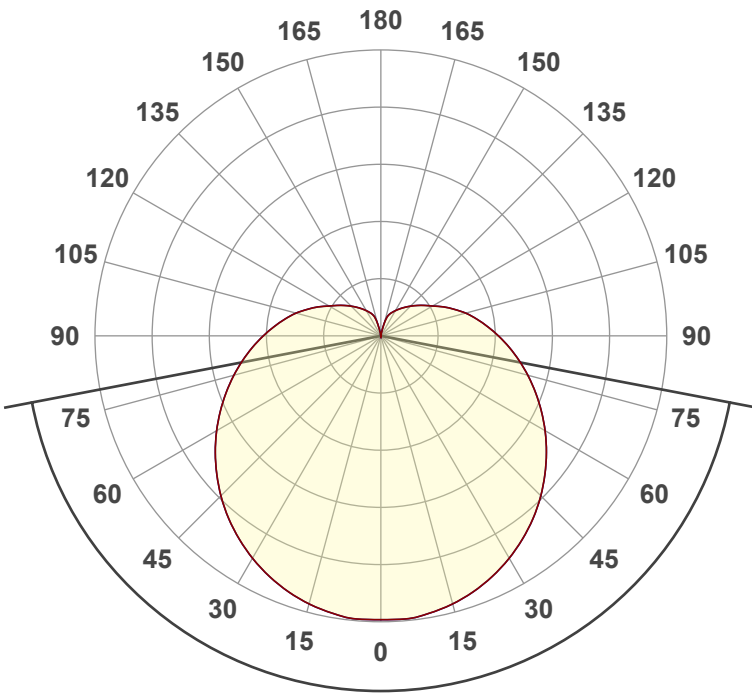


Beam angle **158,4°**






CIE 1931
x: 0,322
y: 0,332

Spectra

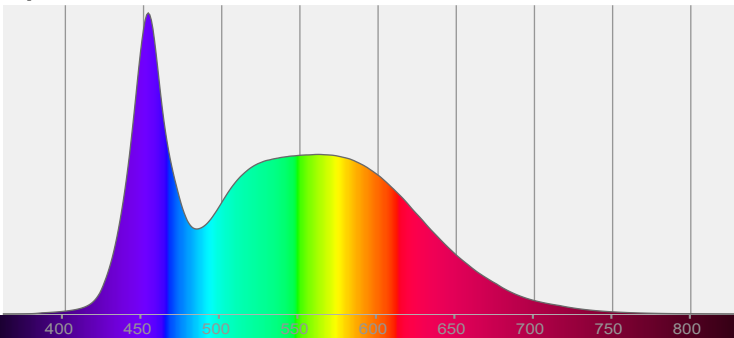



Power

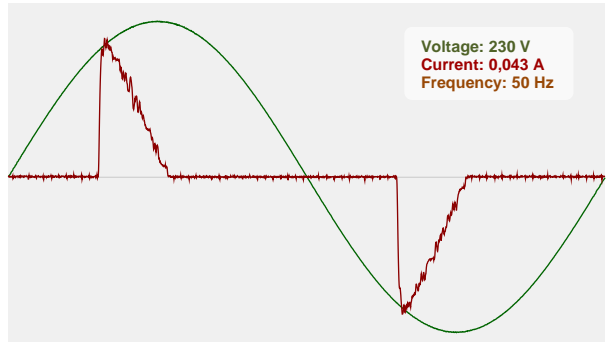

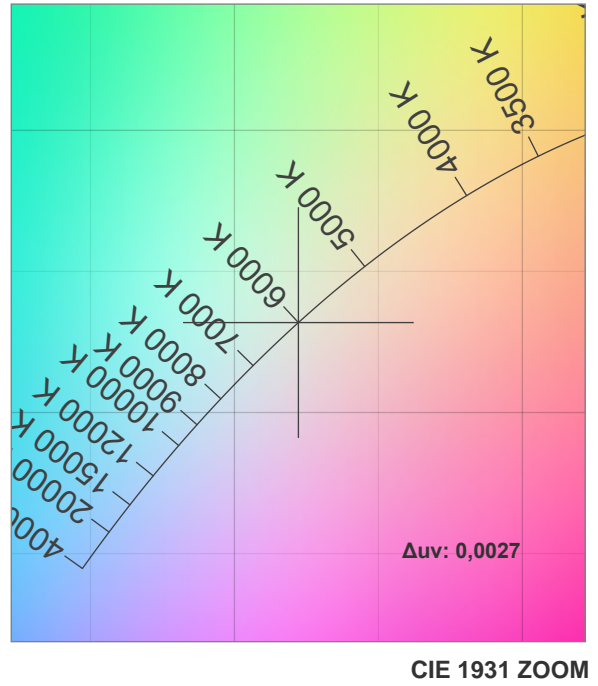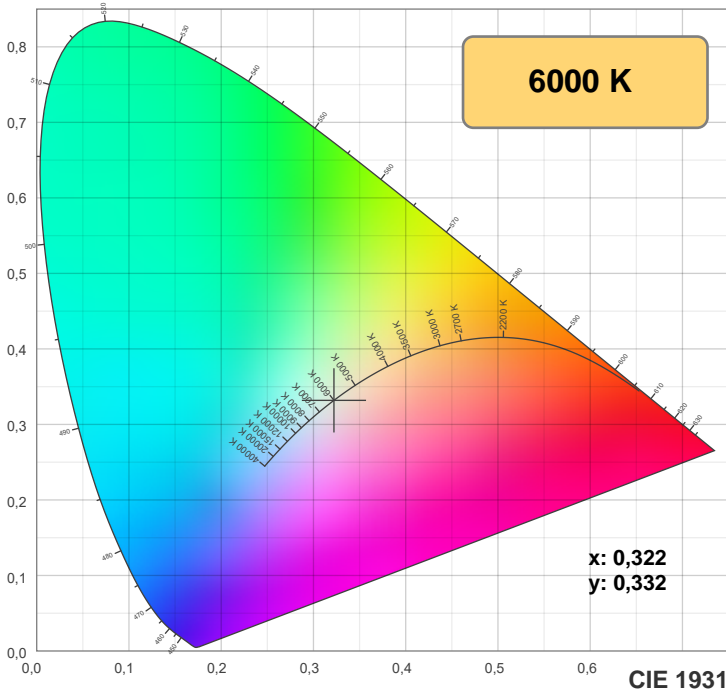

TM-30: 82,8

CRI: 82,1 (R1-R8)

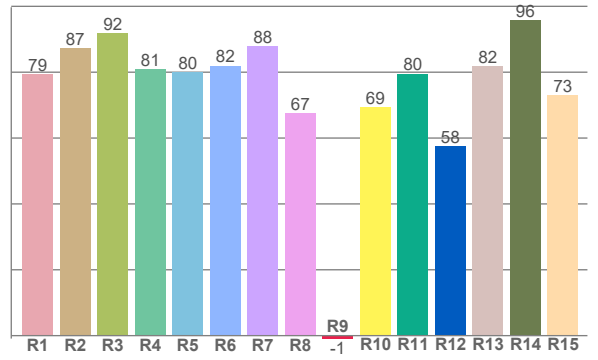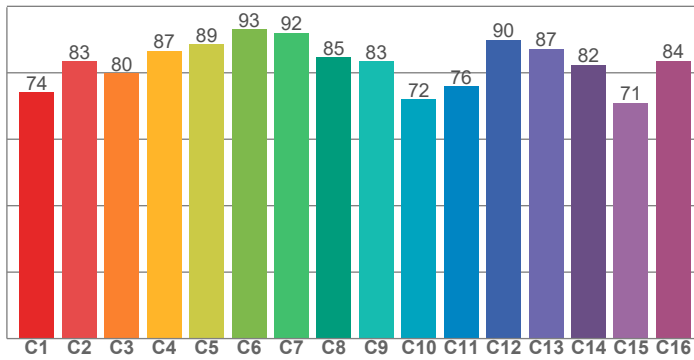

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
79,4	87,3	91,8	80,8	80,0	82,0	87,8	67,4	-0,9	69,3	79,5	57,6	81,8	95,8	73,1


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
74,1	83,4	79,8	86,6	88,5	93,2	92,0	84,6	83,5	71,9	75,9	90,0	87,2	82,5	70,9	83,7

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
82,1	98,5	78,2	71,6	77,1	79,7	83,8	88,8	96,7	86,7	82,2	81,2	80,9	67,8	73,6

CQS: 80,2

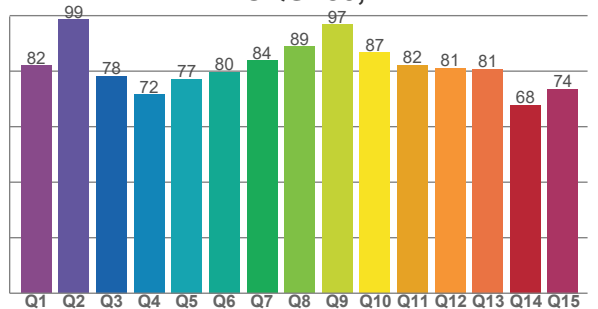







Color parameters


Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
6000 K	82,1	-0,9	82,8	93,2	80,2	0,322	0,332	0,203	0,314	0,0027

Rf 82,8
Fidelity index Rf

Rg 93,2
Gamut index Rg

Hue Bin	R _f	Shifts (%)	
		Chroma	Hue
1	74	-14%	-1%
2	83	-8%	6%
3	80	-5%	10%
4	87	0%	7%
5	89	-1%	3%
6	93	-1%	-2%
7	92	-4%	-3%
8	85	-9%	1%
9	83	-10%	11%
10	72	-6%	17%
11	76	2%	15%
12	90	5%	4%
13	87	8%	-6%
14	82	3%	-10%
15	71	4%	-26%
16	84	-7%	-7%

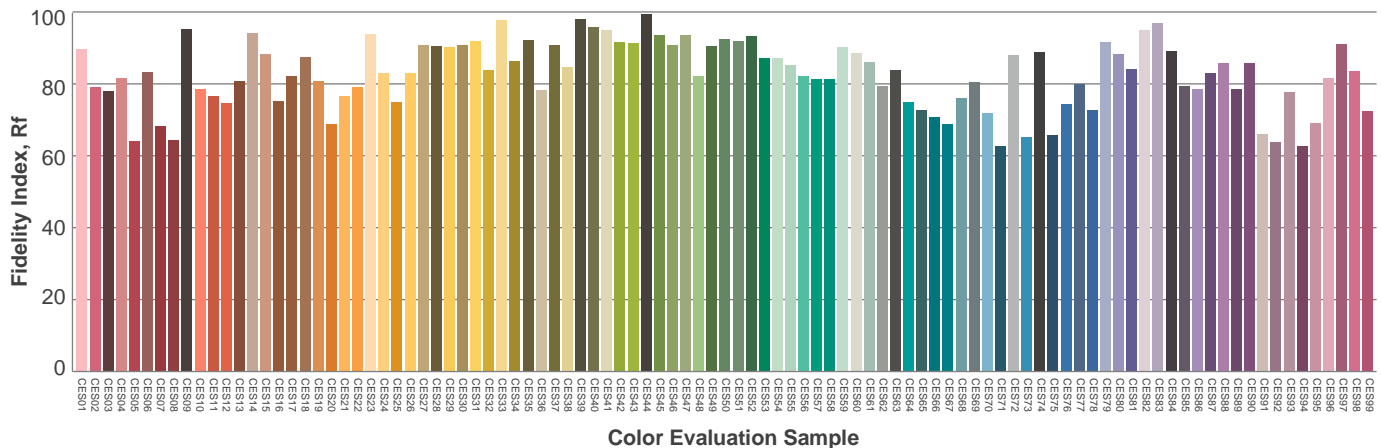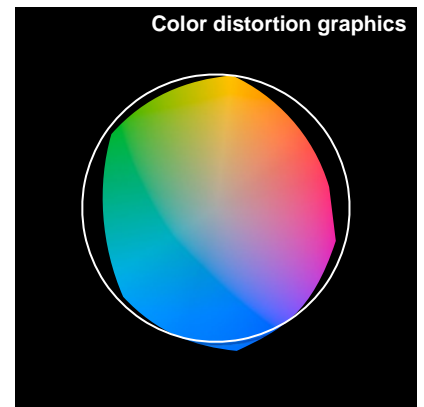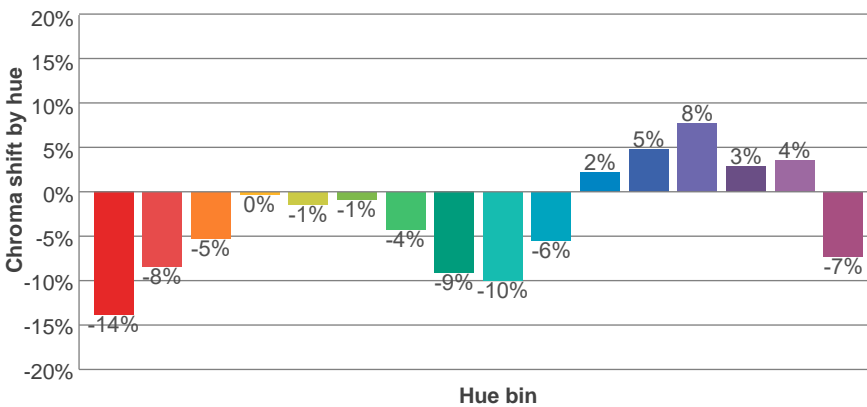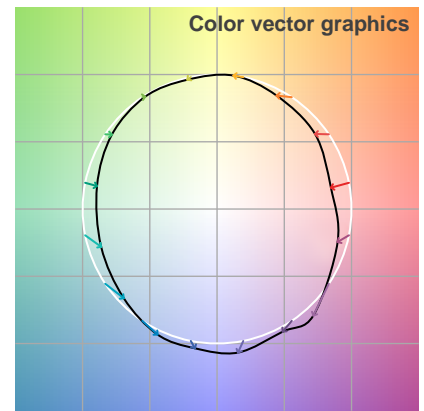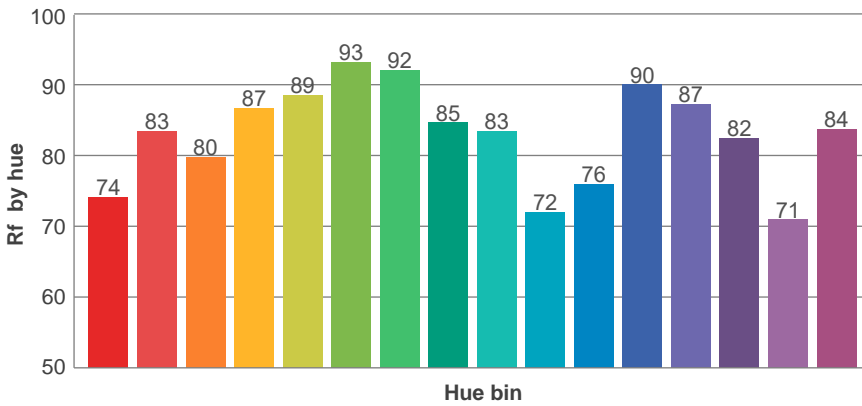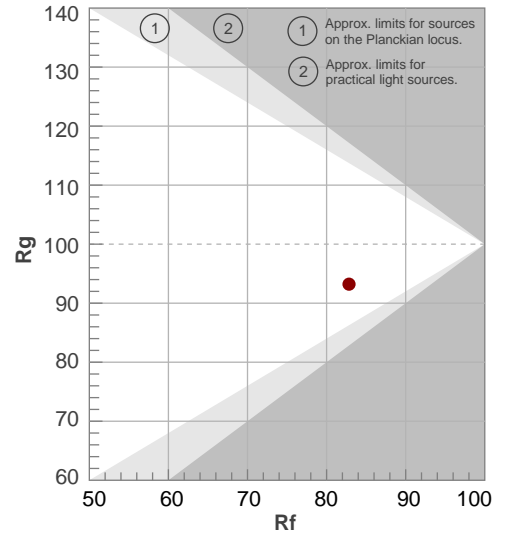

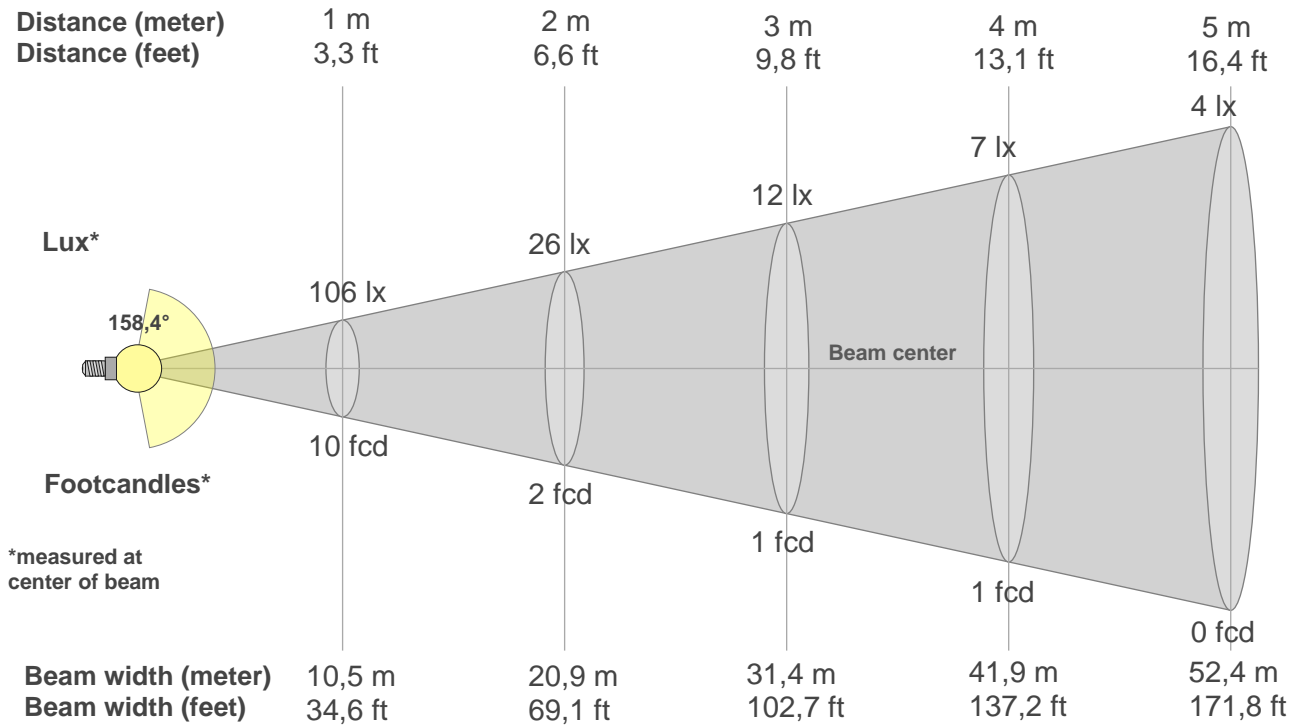

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	19,7ft	23ft	26,2ft	29,5ft	32,8ft	36,1ft	39,4ft	42,7ft	45,9ft	49,2ft	52,5ft	55,8ft	59,1ft	62,3ft	65,6ft
106lx	26lx	12lx	7lx	4lx	3lx	2lx	2lx	1lx	1lx	1lx	1lx	1lx	1lx	0lx	0lx	0lx	0lx	0lx	0lx
9,8fcd	2,5fcd	1,1fcd	0,6fcd	0,4fcd	0,3fcd	0,2fcd	0,2fcd	0,1fcd	0,1fcd	0,1fcd	0,1fcd	0,1fcd	0,1fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd

Intensities in 0° c-plane

0°	9°	18°	27°	36°	45°	54°	63°	72°	81°	90°	99°	108°	117°	126°	135°	144°	153°	162°	171°
106	105	102	97	91	84	76	68	59	51	44	37	30	24	19	16	13	10	7	0
100%	99%	96%	92%	86%	80%	72%	64%	56%	49%	41%	35%	29%	23%	18%	15%	12%	9%	7%	0%

Intensities in 90° c-plane

0°	9°	18°	27°	36°	45°	54°	63°	72°	81°	90°	99°	108°	117°	126°	135°	144°	153°	162°	171°
106	105	102	97	91	84	76	68	59	51	44	37	30	24	19	16	13	10	7	0
100%	99%	96%	92%	86%	80%	72%	64%	56%	49%	41%	35%	29%	23%	18%	15%	12%	9%	7%	0%

Intensities in 180° c-plane


0°	9°	18°	27°	36°	45°	54°	63°	72°	81°	90°	99°	108°	117°	126°	135°	144°	153°	162°	171°
106	105	102	97	91	84	76	68	59	51	44	37	30	24	19	16	13	10	7	0
100%	99%	96%	92%	86%	80%	72%	64%	56%	49%	41%	35%	29%	23%	18%	15%	12%	9%	7%	0%

Intensities in 270° c-plane

0°	9°	18°	27°	36°	45°	54°	63°	72°	81°	90°	99°	108°	117°	126°	135°	144°	153°	162°	171°
106	105	102	97	91	84	76	68	59	51	44	37	30	24	19	16	13	10	7	0
100%	99%	96%	92%	86%	80%	72%	64%	56%	49%	41%	35%	29%	23%	18%	15%	12%	9%	7%	0%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
158,4°	301,8°	334,2°	45,9%	29,1%

iso-candela diagram

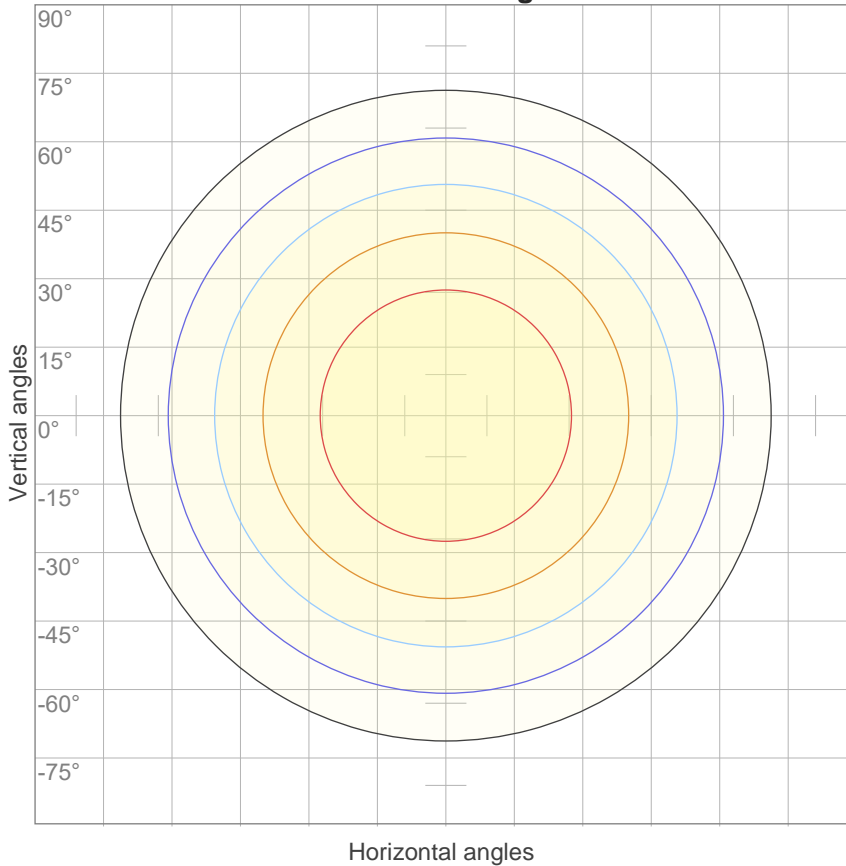


10%	11 cd
20%	21 cd
30%	32 cd
40%	42 cd
50%	53 cd
60%	63 cd
70%	74 cd
80%	85 cd
90%	95 cd

Conditions:

Number of c-planes: 12

Candela at center: 106 cd

iso-lux diagram

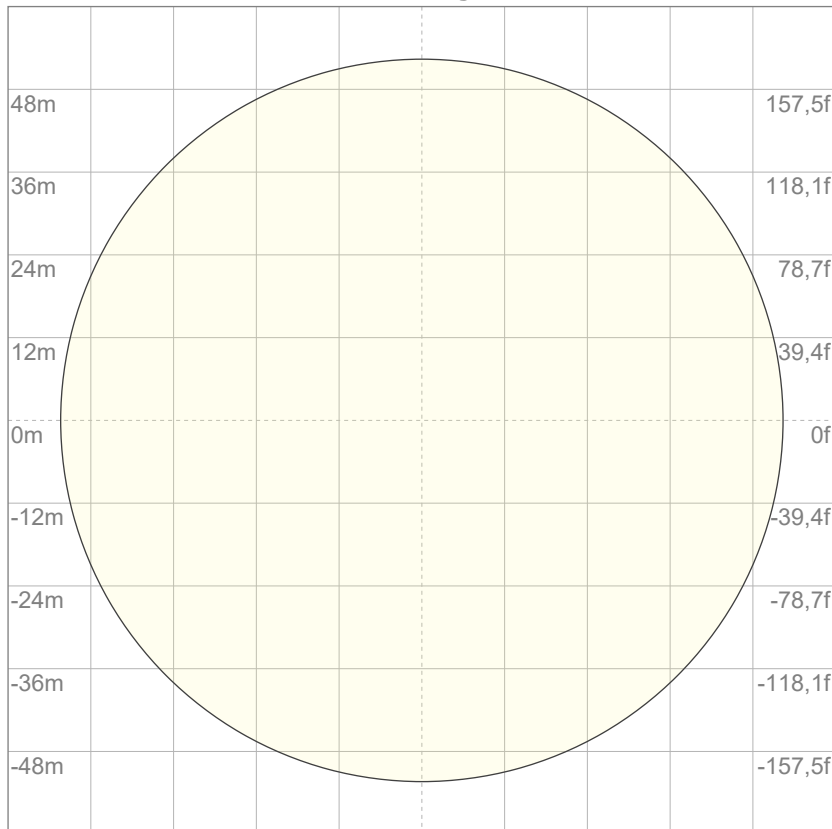

3%	31,7m lx
5%	52,9m lx
10%	0,106 lx
30%	0,317 lx
50%	0,529 lx

Conditions:

Number of c-planes: 12

Lux at center: 1,06 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.

Glare evaluation according to UGR


p Ceiling		70	70	50	50	30	70	70	50	50	30
p Walls		50	30	50	30	30	50	30	50	30	30
p Floor		20	20	20	20	20	20	20	20	20	20
Room size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	23,5	24,7	24,2	25,3	26,1	23,5	24,7	24,2	25,3	26,1
	3H	25,4	26,5	26,1	27,1	27,8	25,4	26,5	26,1	27,1	27,8
	4H	26,3	27,4	27,0	28,0	28,7	26,3	27,4	27,0	28,0	28,7
	6H	27,2	28,1	27,9	28,8	29,6	27,2	28,1	27,9	28,8	29,6
	8H	27,6	28,6	28,3	29,2	30,1	27,6	28,6	28,3	29,2	30,1
	12H	28,0	29,0	28,7	29,6	30,5	28,0	29,0	28,7	29,6	30,5
4H	2H	24,2	25,2	24,9	25,9	26,6	24,2	25,2	24,9	25,9	26,6
	3H	26,3	27,3	27,0	27,9	28,8	26,3	27,3	27,0	27,9	28,8
	4H	27,3	28,4	28,1	28,9	29,8	27,3	28,4	28,1	28,9	29,8
	6H	28,4	29,2	29,1	29,9	30,7	28,4	29,2	29,1	29,9	30,7
	8H	28,9	29,6	29,6	30,3	31,1	28,9	29,6	29,6	30,3	31,1
	12H	29,3	29,9	30,1	30,7	31,6	29,3	29,9	30,1	30,7	31,6
8H	4H	27,7	28,4	28,5	29,2	30,0	27,7	28,4	28,5	29,2	30,0
	6H	29,0	29,6	29,8	30,4	31,3	29,0	29,6	29,8	30,4	31,3
	8H	29,6	30,1	30,4	31,0	32,0	29,6	30,1	30,4	31,0	32,0
	12H	30,3	30,7	31,1	31,5	32,5	30,3	30,7	31,1	31,5	32,5
12H	4H	27,8	28,4	28,5	29,2	30,0	27,8	28,4	28,5	29,2	30,0
	6H	29,1	29,6	29,9	30,5	31,5	29,1	29,6	29,9	30,5	31,5
	8H	29,9	30,3	30,7	31,1	32,0	29,9	30,3	30,7	31,1	32,0
Variation of the observer position for the luminaire distance S											
S = 1.0H		0,1 / -0,1					0,1 / -0,1				
S = 1.5H		0,1 / -0,1					0,1 / -0,1				
S = 2.0H		0,2 / -0,2					0,2 / -0,2				
CIE 117-1995. Corrected glare indices referring to 599 lm total luminous flux											

Coefficients of Utilization

Ceiling reflectance	80				70				50			30			10			0			
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0			
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio)																				
	Room Values are expressed as percentage of Lumens delivered to the task surface																				
0	113	113	113	113	108	108	108	108	97	97	97	88	88	88	80	80	80	75			
1	99	93	88	83	94	88	83	79	80	76	72	71	68	65	64	61	59	55			
2	89	79	71	64	84	75	68	62	68	62	57	61	56	52	54	50	47	43			
3	80	68	59	52	76	65	57	50	58	52	46	52	47	42	47	42	38	35			
4	73	60	50	43	69	57	48	41	51	44	38	46	40	35	41	36	32	29			
5	67	53	43	36	63	50	42	35	46	38	32	41	35	30	37	31	27	24			
6	61	47	38	31	58	45	36	30	41	33	28	37	31	26	33	28	24	21			
7	57	43	34	27	54	41	32	26	37	30	24	33	27	23	30	25	21	18			
8	53	39	30	24	50	37	29	23	34	27	22	30	24	20	28	22	18	16			
9	49	35	27	21	46	34	26	21	31	24	19	28	22	18	25	20	17	14			
10	46	32	24	19	43	31	24	18	28	22	17	26	20	16	24	19	15	13			

LAMPS (number of lamps)

Luminaire budgetary diagram

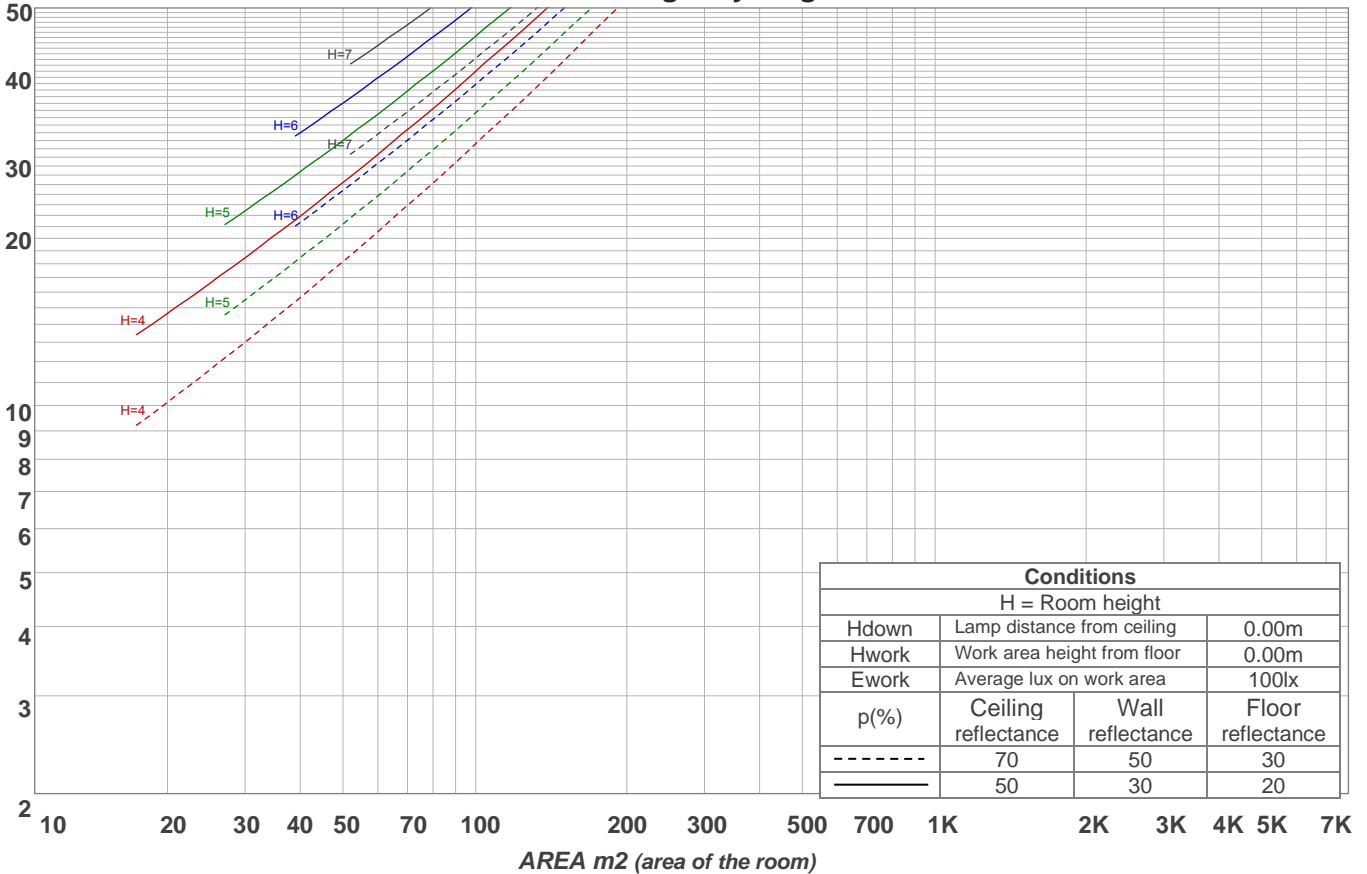


Zonal Lumen Summary

0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
{LUM0-10}	29,2 lm	45,5 lm	57,7 lm	65,0 lm	67,4 lm	65,3 lm	59,9 lm	52,3 lm
90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
43,5 lm	34,5 lm	25,4 lm	17,8 lm	12,2 lm	7,77 lm	4,45 lm	1,39 lm	0,015 lm


LCS table

BUG rating:	B0 U3 G1	
Forward light	Lumens	Lumens %
Low(0-30):	42,4	7,1%
Medium(30-60):	95,1	15,9%
High(60-80):	62,6	10,4%
Very high(80-90):	26,1	4,4%
Back light		
Low(0-30):	42,4	7,1%
Medium(30-60):	95,1	15,9%
High(60-80):	62,6	10,4%
Very high(80-90):	26,1	4,4%
Uplight		
Low(90-100):	43,5	7,3%
High(100-180):	103,5	17,3%

LCS graph

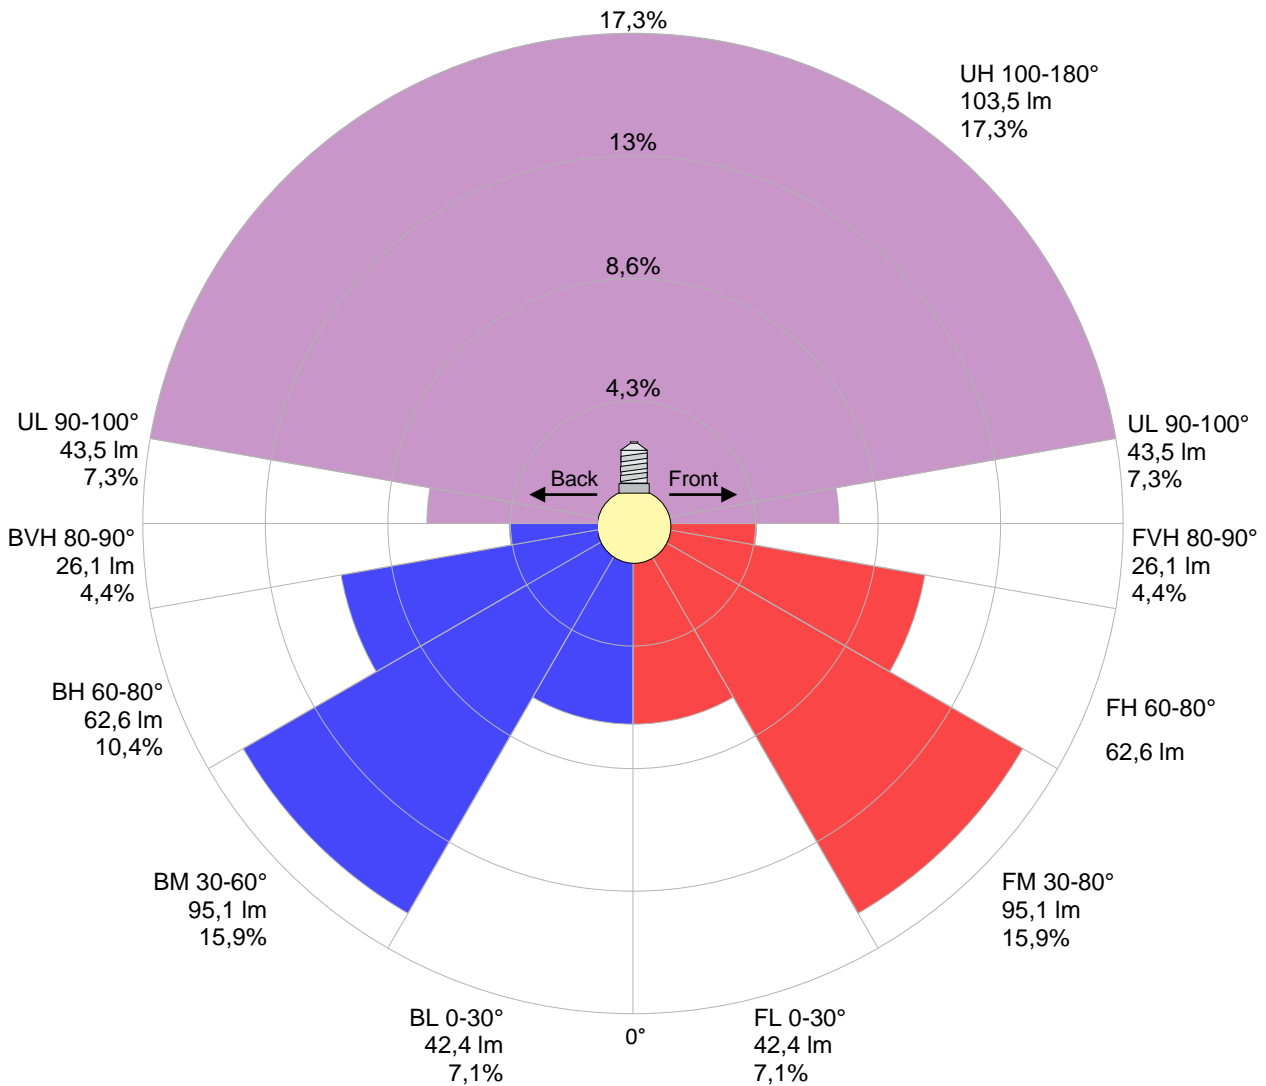

Warmup curve

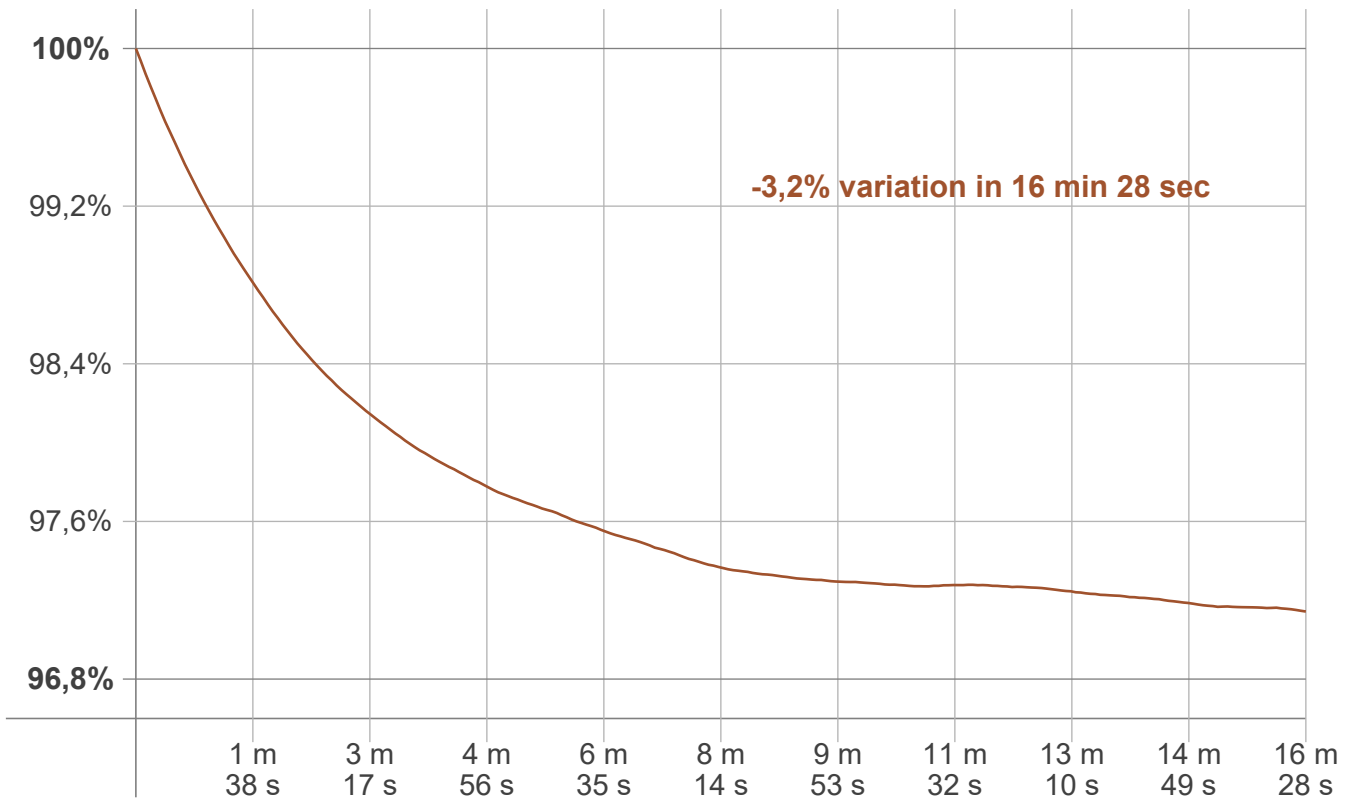

Warmup result

Warmup time:	Lamp stabilized in 16 min 28 sec
Warmup variation	-3,2%

Warmup conditions

Stable period:	15 min
Stable change max:	2,0%
Minimum time:	15 min

Color temperature change

CCT start	CCT change	CCT end
5904 K	+96 K	6000 K


Output change

Output start	Output change	Output end
618 lm	-19 lm	599 lm


Flicker curve (complete sampled flicker signal)



Flicker frame (frame of one flicker period)

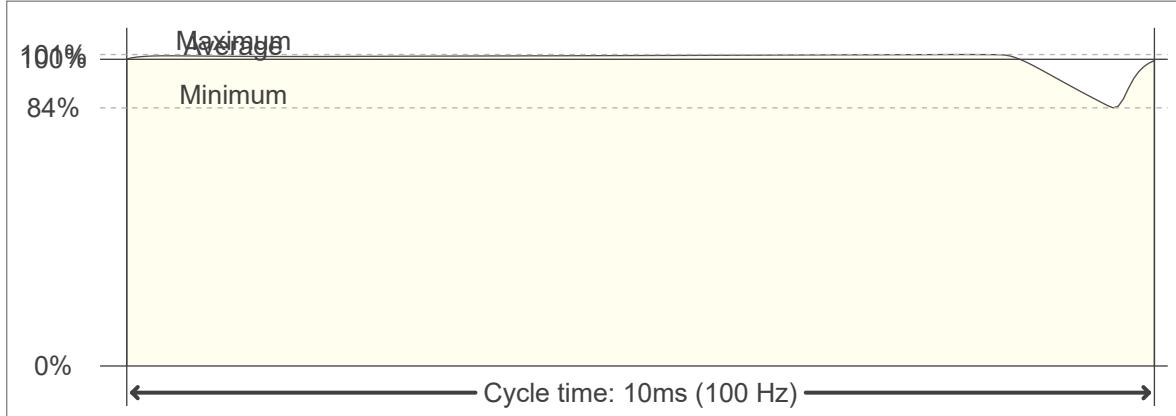

Flicker FFT (frequency scope of flicker curve)

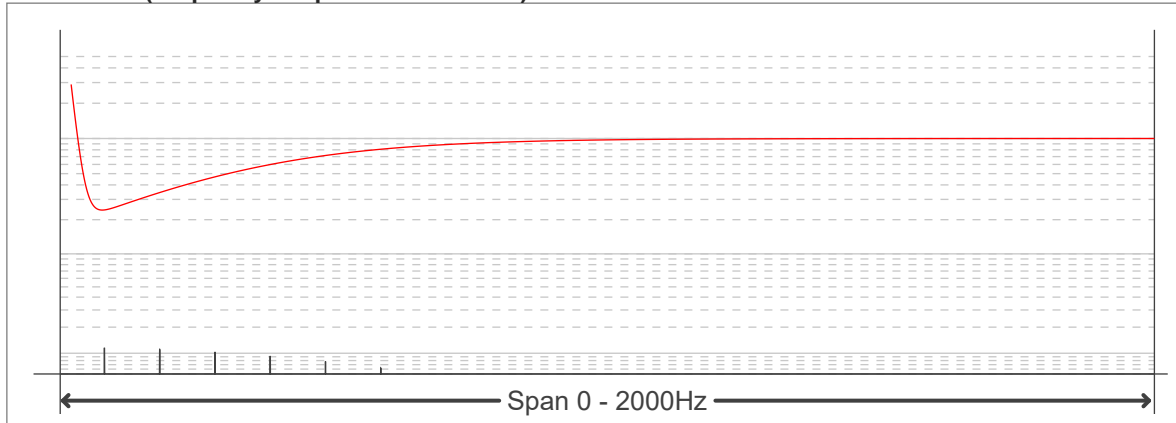

Flicker results:

Flicker frequency:		100 Hz	
Flicker index:	0,01	JA8/10 40Hz	0,02 %
Flicker percentage:	9,46 %	JA8/10 90Hz	0,04 %
SVM: (Visual flicker)	0,1	JA8/10 200Hz	2,82 %
PstLM	0,01	JA8/10 400Hz	5,52 %
Mp	0,01	JA8/10 1000Hz	8,53 %

Flicker conditions:

Sample rate:	20000 samples/second
--------------	----------------------