

# Light Measurement Report

Print date: 25-9-2025

Measurement date and time: 25-9-2025 13:41:45 – Measurement no. VFR-250925-3365-MS

Measurement tracking No. and Link: [VT250925-007862](#)

Operator:



## Laboratory and Equipment

Laboratory Owner and Location  
Goniospectrometer System and Type  
Sensor Name, Calibr. Date and Serial No.  
Spectrometer Manufacturer and Model

Viso Systems, Copenhagen V, Denmark  
LabSpion – Type C, horizontal  
LabSensor Model2 – 11-1-2024 – 3130191315  
Ibsen Photonics, Denmark – Freedom VIS (Custom Viso)

## Measurement Conditions

Number of C-planes and Resolution  
 $\gamma$  (gamma)-Resolution  
Test Distance  
Input Power, Power and Displ. Factors  
Input RMS Voltage and Current  
Frequency of Input Power  
Warm-up Time and Variation

36 planes – 10°  
5°  
2,89 m  
115,4 W – PF 0,98 – DPF 0,98  
230 V – 0,512 A  
50 Hz  
Lamp stabilized in 15 min 3 sec – 2,0%

## Tested Light Source



Product Name  
Item No. and Manufacturer  
Product Description (line 1)  
SWITCH

812720-4000K-120W  
812720-4000K-120W – Dutchfulfillment  
LED HIGHBAY ARGOS | 0-10V | 150W/120W/100W | 60°/90°/120° | CCT

## Main Light Measurement Results

Output – Total Lumen (Up% / Down%)  
Efficiency  
Peak Intensity and Beam Angle  
Correlated Color Temperature, Target/Measured  
Color Rendering Index  
Color Rendering TM30-18  
Color Shift, CIE duv and MacAdam Steps  
Flicker

15826 lm – 0,17% / 99,83%  
137 lm/W  
5460 cd – 113,4°  
CCT = 4000 K / 4138 K  
CRI 72,0  
 $R_f$  73,7 –  $R_g$  94,7  
Duv 0,0018 – SDCM 3,1  
SVM 0 – PstLM 0,1

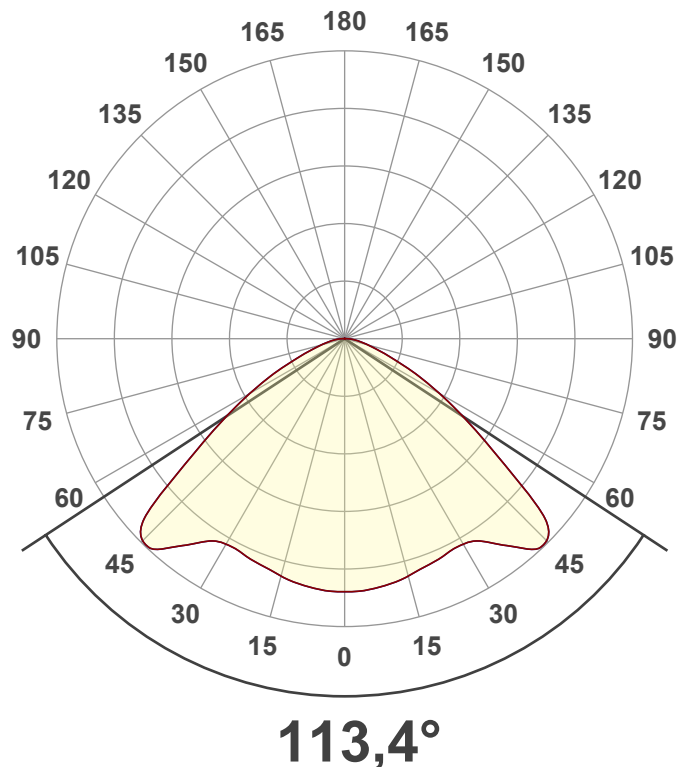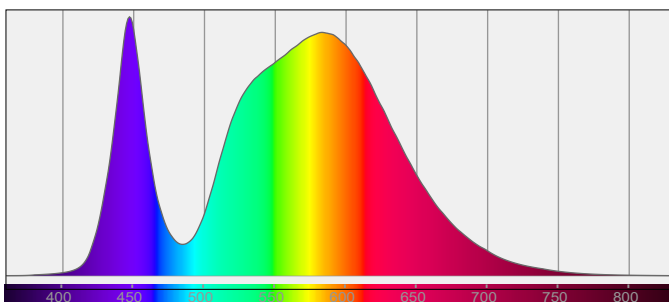

# Light Measurement Report

Print date: 25-9-2025

Measurement date and time: 25-9-2025 13:41:45 – Measurement no. VFR-250925-3365-MS


Measurement tracking No. and Link: [VT250925-007862](https://www.viso-systems.com/VT250925-007862)

Operator:



## Luminous Intensity diagram

Unit: 0-100% of peak intensity

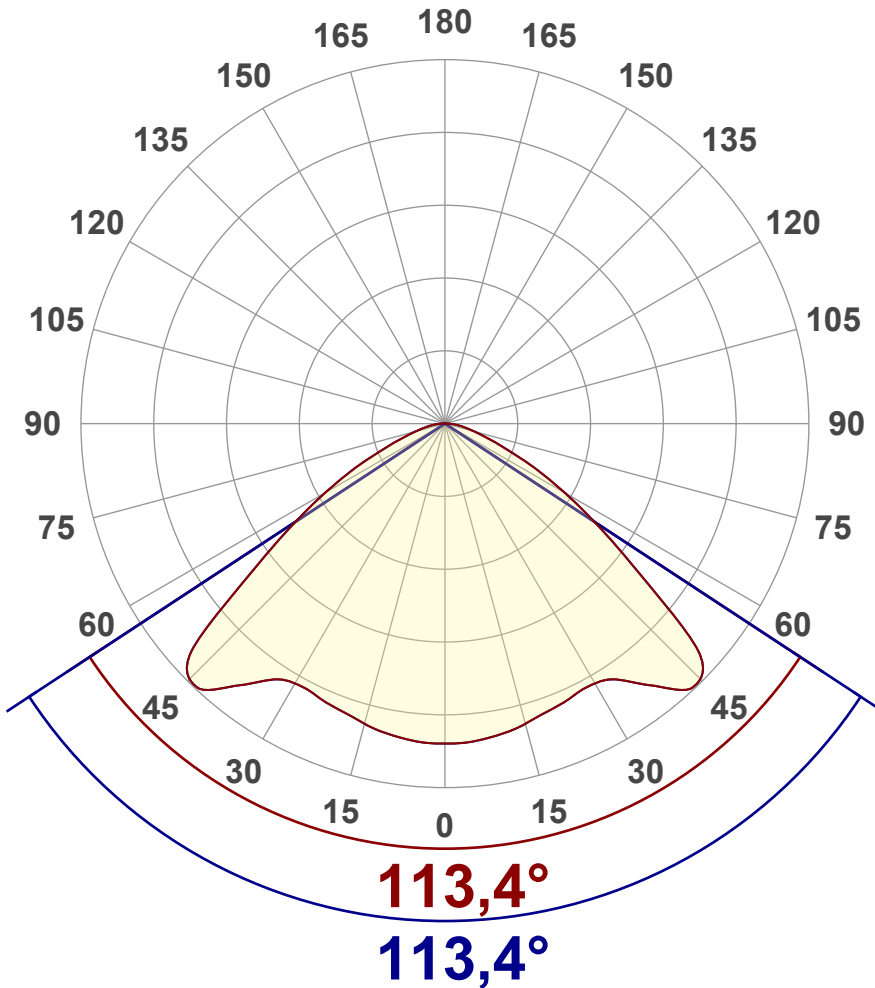

## Main Values

Output (total Lumen)	15826 lm
Lumen Up% / Down%	0,17% / 99,83%
Peak Intensity	5460 cd
Beam Angle (50%)	113,4°
Beam Angle (90%)	113,4°
Beam Angle (10%)	113,4°

## Cut-off Angle

Average 2,5%	171,2°
--------------	--------

## Field Angle

Average 10%	146,6°
-------------	--------


## Intensity Ratio

In 120° cone	87,1%
In 90° cone	56,3%

**C000-C180**

**C090-C270**

## Linear distribution diagram - Intensity (candela) vs $\gamma$ -angle

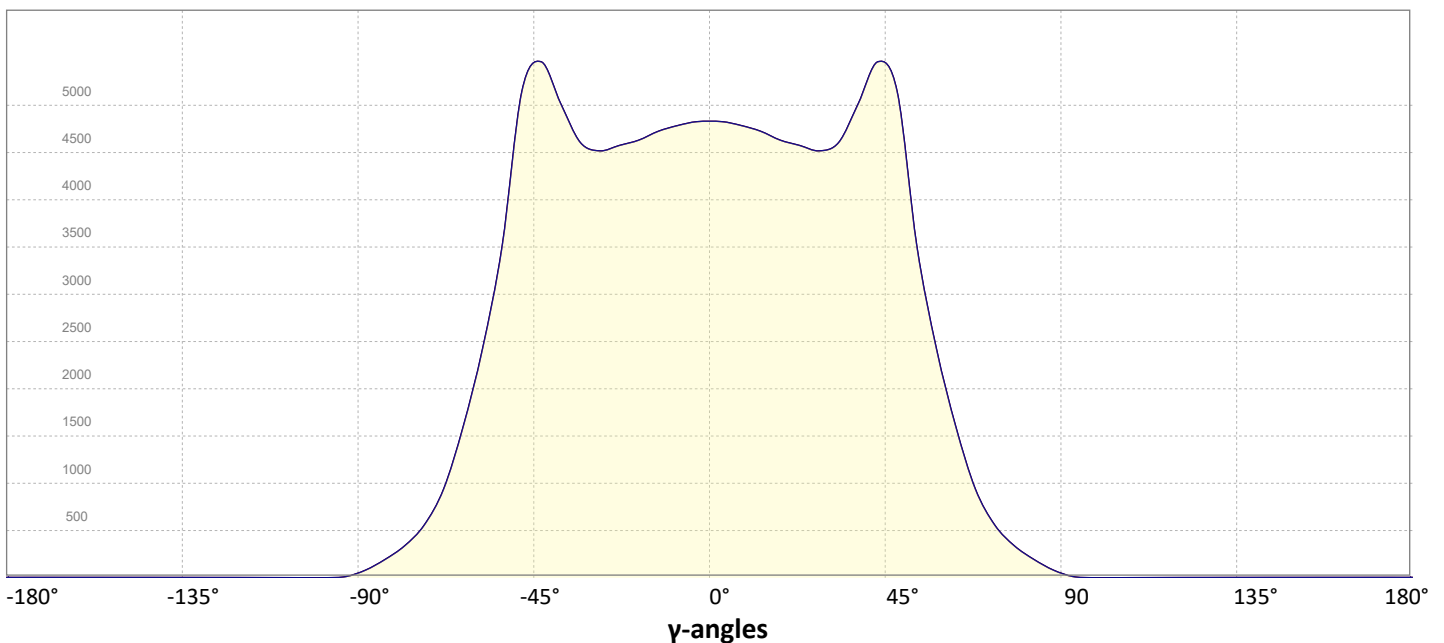

# Light Measurement Report

Print date: 25-9-2025


Measurement date and time: 25-9-2025 13:41:45 – Measurement no. VFR-250925-3365-MS

Measurement tracking No. and Link: [VT250925-007862](https://vt250925-007862)

Operator:




## Iso-intensity Diagram (Iso-candela)

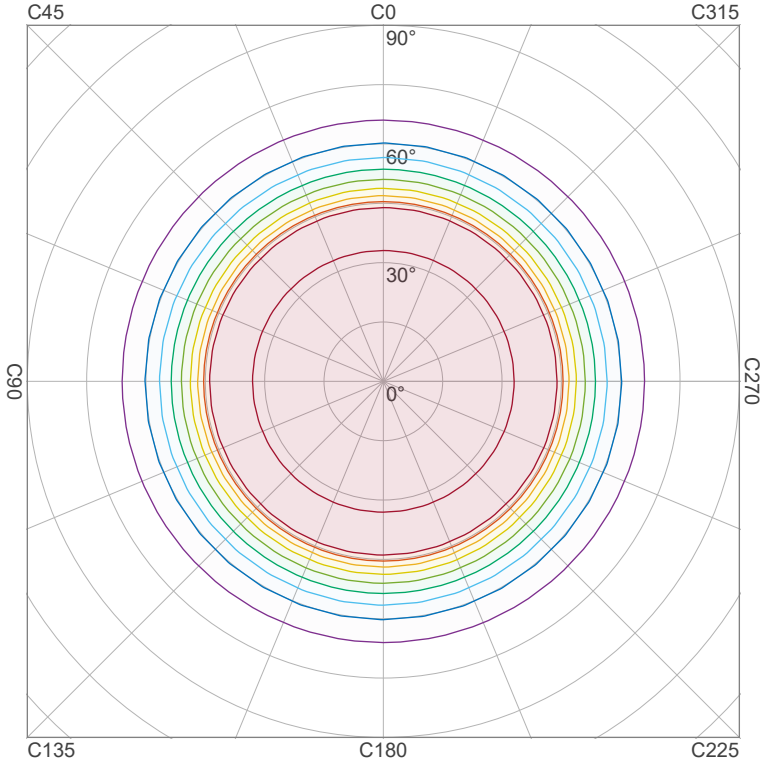

90 %	4906,1 cd
80 %	4361,0 cd
70 %	3815,9 cd
60 %	3270,7 cd
50 %	2725,6 cd
40 %	2180,5 cd
30 %	1635,4 cd
20 %	1090,2 cd
10 %	545,1 cd

Peak intensity: 5451,2 cd  
Number of c-planes: 36

## Iso-illuminance Diagram (Iso-lux)

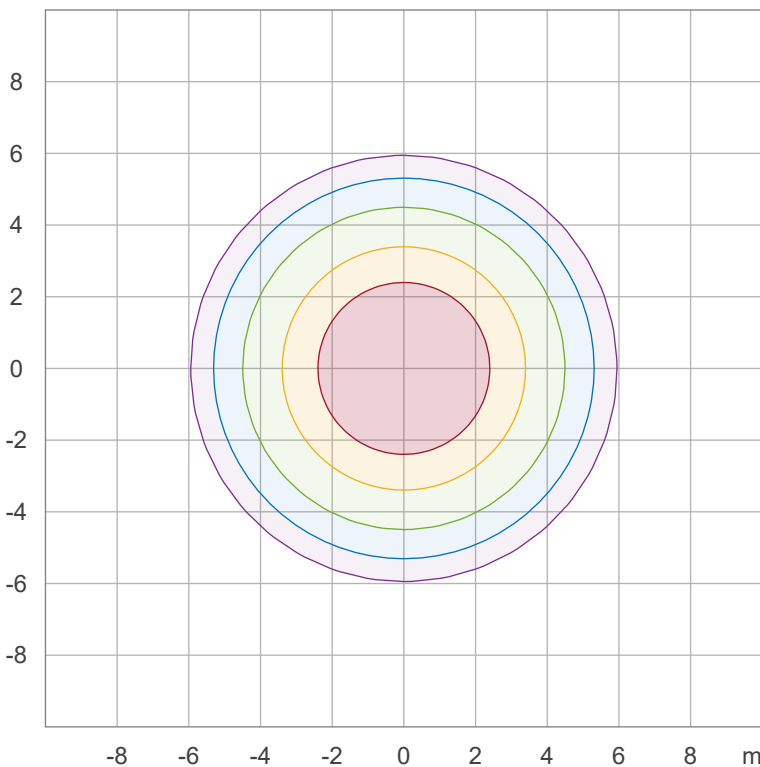

50,0 %	268,2 lx
30,0 %	160,9 lx
10,0 %	53,6 lx
5,0 %	26,8 lx
3,0 %	16,1 lx

Peak illuminance: 536,3 lx  
Mounting height: 3,0 m  
Number of c-planes: 36

# Light Measurement Report

Print date: 25-9-2025

Measurement date and time: 25-9-2025 13:41:45 – Measurement no. VFR-250925-3365-MS

Measurement tracking No. and Link: [VT250925-007862](#)

Operator:



## Color details


Correlated Color Temperature, Target CCT = 4000 K  
 Correlated Color Temperature, Measured CCT = 4138 K  
 Color Rendering Index CRI 72,0  
 Color Rendering Index, R9 (red component) R9 = -27,0  
 Color Rendering TM30-18 R<sub>f</sub> 73,7 – R<sub>g</sub> 94,7  
 Color Quality Scale CQS = 71,8

MacAdam Steps SDCM = 3,1  
 Color coordinates CIE 1931 (x;y) = (0,381;0,377)  
 Color coordinate CIEs 1960 (u;v) = (0,225;0,334)  
 Color deviation from BBL Duv = 0,0018  
 Color coordinate CIEs 1976 (CIELUV) (u';v') = (0,225;0,502)


### CIE 1931



### CIE 1931 – zoomed on Planckian locus

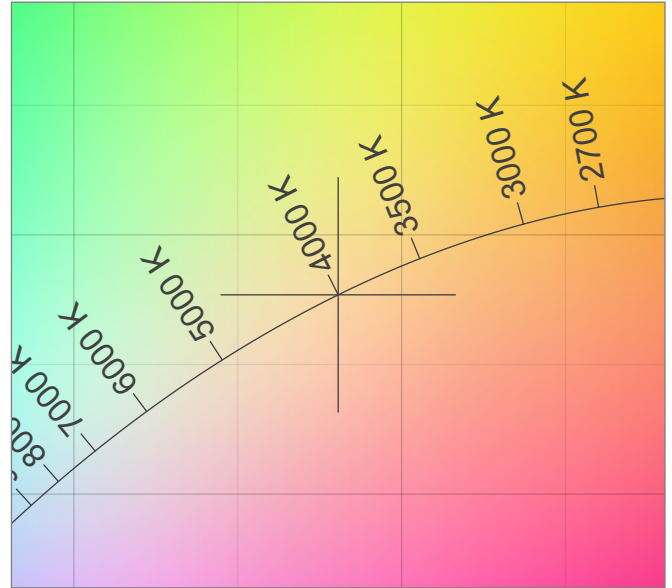


### Color Rendering Index per reference color (CIE 1995)

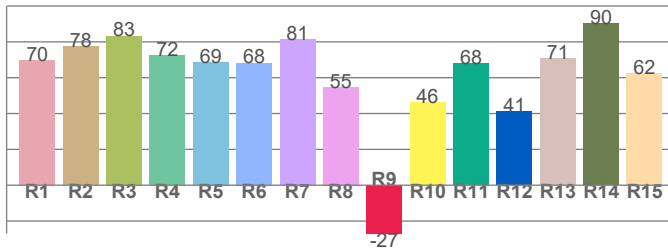


CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
69,5	77,6	83,3	72,3	68,7	68,3	81,3	54,7	-27,0	46,1	67,9	41,0	70,6	90,3	62,4

### Spectral power distribution (SPD) / W/nm – 0-100%

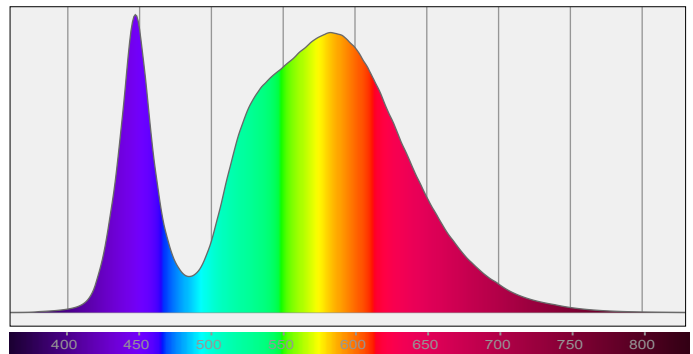


### TM30-18 Rf-values per hue bin

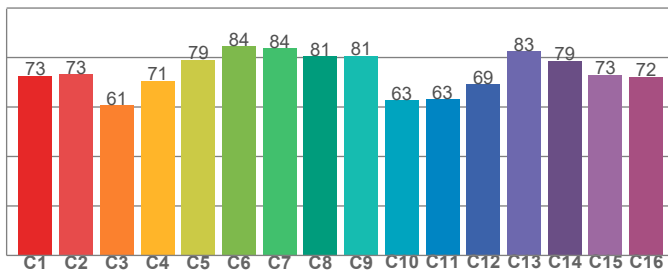

TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
72,7	73,3	60,6	70,6	79,1	84,5	83,9	80,5	80,7	62,9	63,0	69,2	82,6	78,8	73,0	72,3

### Color Quality Scale by reference color

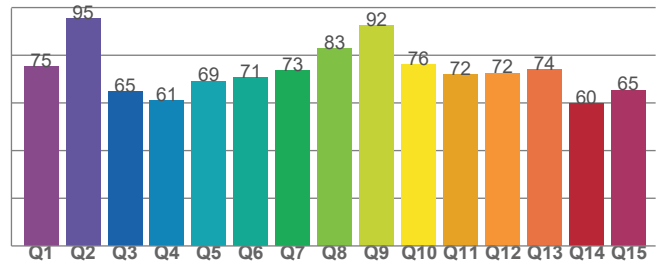

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
75,2	95,4	64,7	60,9	69,1	70,6	73,5	82,7	92,4	76,1	71,8	72,4	73,9	59,6	65,4

# Light Measurement Report

Print date: 25-9-2025


Measurement date and time: 25-9-2025 13:41:45 – Measurement no. VFR-250925-3365-MS

Measurement tracking No. and Link: [VT250925-007862](https://www.viso-systems.com/VT250925-007862)

Operator:



## Beam Details

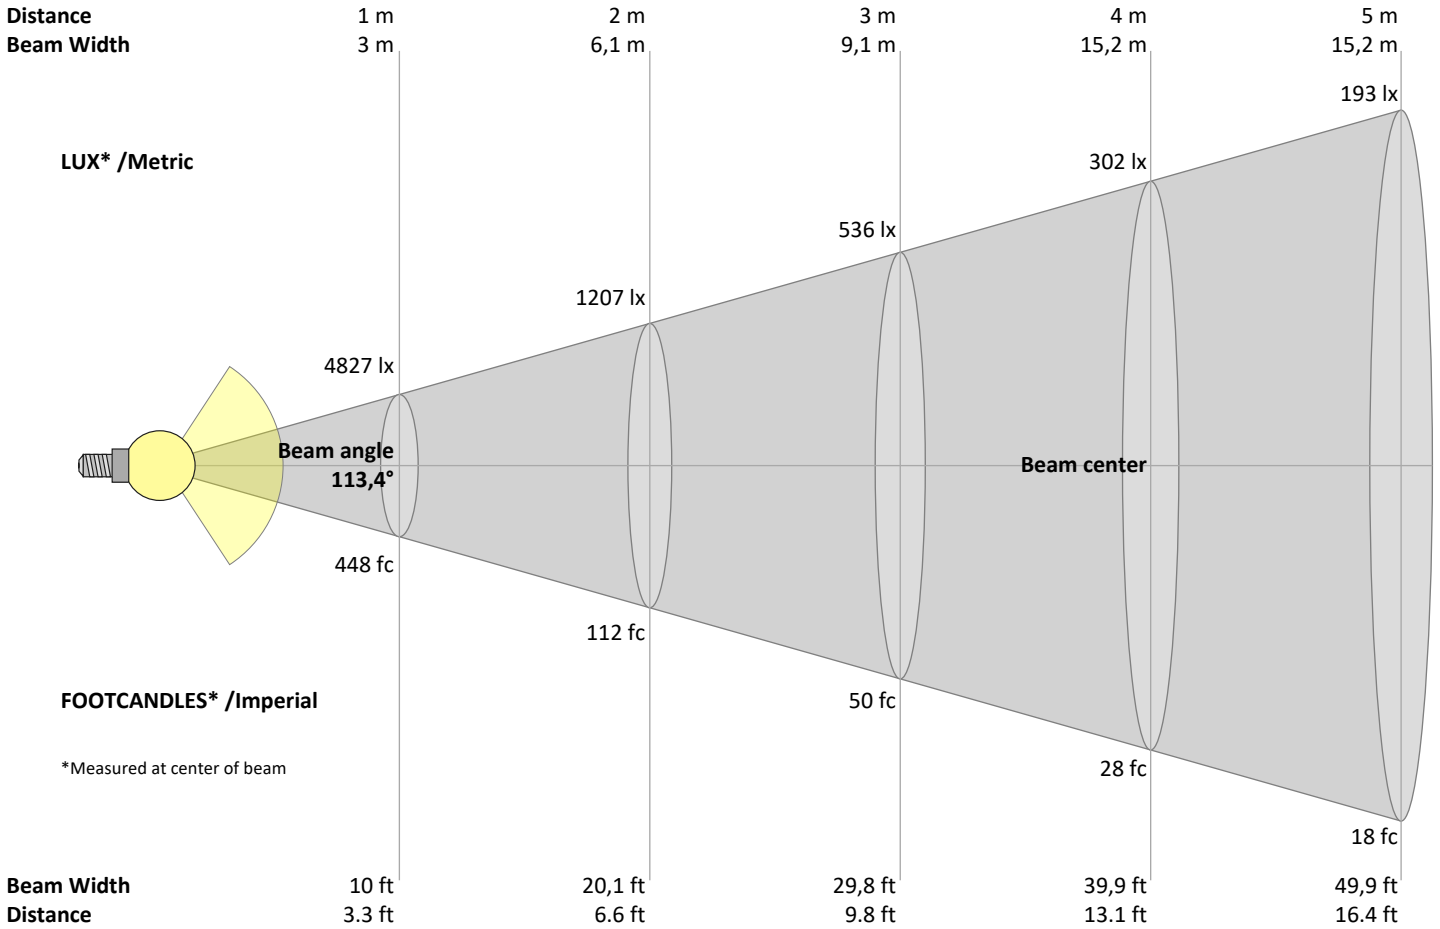

### Beam intensities from 1 – 20 m

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	m
3,3	6,6	9,8	13,1	16,4	19,7	23	26,2	29,5	32,8	36,1	39,4	42,7	45,9	49,2	52,5	55,8	59,1	62,3	65,6	ft
4827	1207	536	302	193	134	99	75	60	48	40	34	29	25	21	19	17	15	13	12	lux
448,4	112,1	49,8	28	17,9	12,5	9,2	7	5,5	4,5	3,7	3,1	2,7	2,3	2	1,8	1,6	1,4	1,2	1,1	fc

### Intensities in 0° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°	γ
4827	4811	4763	4689	4610	4553	4551	4763	5186	5338	4518	3099	2112	1346	792	472	282	150	55	8	cd
100%	100%	99%	97%	96%	94%	94%	99%	107%	111%	94%	64%	44%	28%	16%	10%	6%	3%	1%	0%	of 0°val

### Intensities in 90° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°	γ
4827	4811	4763	4689	4610	4553	4551	4763	5186	5338	4518	3099	2112	1346	792	472	282	150	55	8	cd
100%	100%	99%	97%	96%	94%	94%	99%	107%	111%	94%	64%	44%	28%	16%	10%	6%	3%	1%	0%	of 0°val

### Intensities in 180° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°	γ
4827	4811	4763	4689	4610	4553	4551	4763	5186	5338	4518	3099	2112	1346	792	472	282	150	55	8	cd
100%	100%	99%	97%	96%	94%	94%	99%	107%	111%	94%	64%	44%	28%	16%	10%	6%	3%	1%	0%	of 0°val

### Intensities in 270° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°	γ
4827	4811	4763	4689	4610	4553	4551	4763	5186	5338	4518	3099	2112	1346	792	472	282	150	55	8	cd
100%	100%	99%	97%	96%	94%	94%	99%	107%	111%	94%	64%	44%	28%	16%	10%	6%	3%	1%	0%	of 0°val

# Light Measurement Report

Print date: 25-9-2025

Measurement date and time: 25-9-2025 13:41:45 – Measurement no. VFR-250925-3365-MS

Measurement tracking No. and Link: [VT250925-007862](https://www.viso-systems.com/VT250925-007862)

Operator:



## Light Planning – UGR table

Uncorrected, comprehensive UGR table according to 117-1995

Reflectances		70	70	50	50	30	70	70	50	50	30
ρ Ceiling		70	70	50	50	30	70	70	50	50	30
ρ Walls		50	30	50	30	30	50	30	50	30	30
ρ Floor		20	20	20	20	20	20	20	20	20	20
Room size		Viewed Crosswise					Viewed Endwise				
H = mounting height above eye level		(Viewing direction orthogonal to lamp length axis)					(Viewing direction parallel to lamp length axis)				
X	Y										
2H	2H	32,3	33,5	32,5	33,8	34,0	32,3	33,5	32,5	33,8	34,0
	3H	32,7	33,9	33,1	34,2	34,4	32,7	33,9	33,1	34,2	34,4
	4H	32,8	34,0	33,2	34,2	34,5	32,8	34,0	33,2	34,2	34,5
	6H	33,0	34,0	33,3	34,2	34,6	33,0	34,0	33,3	34,2	34,6
	8H	33,0	33,9	33,3	34,3	34,7	33,0	33,9	33,3	34,3	34,7
	12H	33,0	33,9	33,4	34,3	34,7	33,0	33,9	33,4	34,3	34,7
4H	2H	32,5	33,7	32,9	33,9	34,2	32,5	33,7	32,9	33,9	34,2
	3H	33,1	34,1	33,5	34,4	34,9	33,1	34,1	33,5	34,4	34,9
	4H	33,3	34,1	33,7	34,5	35,1	33,3	34,1	33,7	34,5	35,1
	6H	33,4	34,2	33,9	34,6	35,0	33,4	34,2	33,9	34,6	35,0
	8H	33,5	34,2	34,0	34,6	35,0	33,5	34,2	34,0	34,6	35,0
	12H	33,5	34,1	34,0	34,5	35,0	33,5	34,1	34,0	34,5	35,0
8H	4H	33,3	34,0	33,8	34,4	34,8	33,3	34,0	33,8	34,4	34,8
	6H	33,5	34,1	34,0	34,6	35,1	33,5	34,1	34,0	34,6	35,1
	8H	33,7	34,2	34,2	34,7	35,3	33,7	34,2	34,2	34,7	35,3
	12H	33,8	34,2	34,4	34,7	35,3	33,8	34,2	34,4	34,7	35,3
12H	4H	33,3	33,9	33,8	34,3	34,8	33,3	33,9	33,8	34,3	34,8
	6H	33,6	34,0	34,1	34,6	35,2	33,6	34,0	34,1	34,6	35,2
	8H	33,7	34,1	34,3	34,6	35,2	33,7	34,1	34,3	34,6	35,2

### Variations with the observer position for the luminaire spacings, S:

S = 1.0H	0,4 / -0,3	0,4 / -0,3
S = 1.5H	1,1 / -1,2	1,1 / -1,2
S = 2.0H	2,2 / -2,3	2,2 / -2,3

## Coefficients of Utilization

Ceiling reflectance	80	70	50	30	10	0												
Wall reflectance	70 50 30	10 70 50	30 10 50	30 10 50	30 10 50	30 10 0												
Floor reflectance	20 20 20	20 20 20	20 20 20	20 20 20	20 20 20	20 20 0												
RCR	(RCR: Room Cavity Ratio)																	
	Room Values are expressed as percentage of Lumen delivered to the task surface																	
0	119 119 119	119 116 116	116 116 111	111 111 106	106 106 102	102 102 100												
1	110 105 102	98 107 103	100 96 99	96 93 95	93 90 91	90 88 86												
2	100 93 86	81 98 91	85 80 87	82 78 84	80 76 81	78 75 72												
3	92 82 74	68 89 80	73 67 77	71 66 74	69 65 72	67 64 61												
4	84 72 64	57 82 71	63 57 68	62 56 66	60 55 64	59 55 52												
5	77 64 56	49 75 63	55 49 61	54 48 59	53 48 57	52 47 45												
6	71 58 49	42 69 57	48 42 55	47 42 53	47 42 52	46 41 39												
7	65 52 43	37 64 51	43 37 50	42 37 48	41 36 47	41 36 34												
8	61 47 39	33 59 46	38 33 45	38 32 44	37 32 43	37 32 30												
9	56 43 35	29 55 42	35 29 41	34 29 40	34 29 39	33 29 27												
10	53 39 31	26 51 39	31 26 38	31 26 37	30 26 36	30 26 24												

# Light Measurement Report

Print date: 25-9-2025

Measurement date and time: 25-9-2025 13:41:45 – Measurement no. VFR-250925-3365-MS

Measurement tracking No. and Link: [VT250925-007862](#)


Operator:



## Luminaire budgetary diagram

Uncorrected, comprehensive UGR table according to 117-1995

LAMPS (number of lamps)

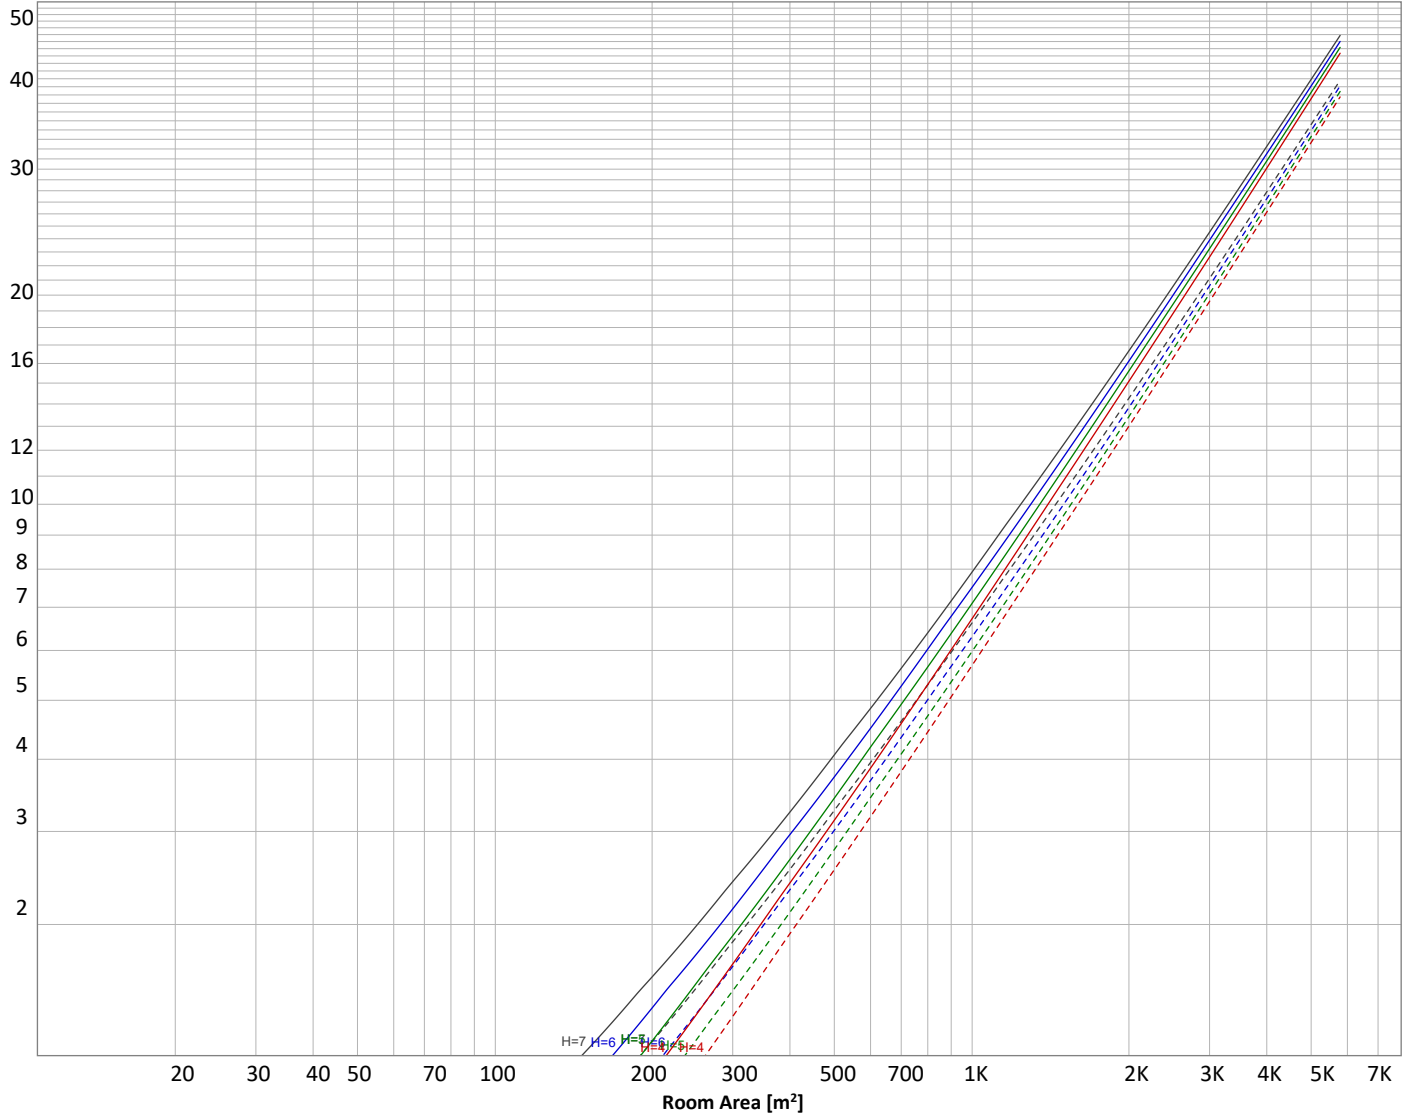

### Conditions

H = Room height	Flux = 15826 lm				
H <sub>down</sub> = Lamp distance from ceiling =	0.00 m	Line type	Ceiling reflectance	ρ(%) Wall reflectance	Floor reflectance
H <sub>work</sub> = Work area height from floor =	0.00 m	-----	70	50	30
E <sub>work</sub> = Average lux on work area =	100 lx	—————	50	30	20

### Zonal Lumen Summary

0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
458 lm	1326 lm	2106 lm	3012 lm	4095 lm	2789 lm	1338 lm	508 lm	166 lm
90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
12,5 lm	1,23 lm	2,24 lm	2,80 lm	2,79 lm	2,48 lm	1,91 lm	1,20 lm	0,411 lm

# Light Measurement Report

Print date: 25-9-2025

Measurement date and time: 25-9-2025 13:41:45 – Measurement no. VFR-250925-3365-MS

Measurement tracking No. and Link: [VT250925-007862](#)

Operator:



## Outdoor Light Planning

### Lumen per Zone

Zone (γ)	Lumen	% Total
0-10°	458 lm	2,9%
10-20°	1326 lm	8,4%
20-30°	2106 lm	13,3%
30-40°	3012 lm	19,0%
40-50°	4095 lm	25,9%
50-60°	2789 lm	17,6%
60-70°	1338 lm	8,5%
70-80°	508 lm	3,2%
80-90°	166 lm	1,0%
90-100°	13 lm	0,1%
100-110°	1 lm	0,0%
110-120°	2 lm	0,0%
120-130°	3 lm	0,0%
130-140°	3 lm	0,0%
140-150°	2 lm	0,0%
150-160°	2 lm	0,0%
160-170°	1 lm	0,0%
170-180°	0 lm	0,0%
<b>Total</b>	<b>15826 lm</b>	<b>100,0%</b>

### Intensity peaks

Max intensity	5460 cd
Intensity, 90°	55 cd
Intensity, 0°	4827 cd

### Zonal Lumen summary


Zone (γ)	Lumen	% Total
0-30°	3890 lm	24,6%
0-40°	6903 lm	43,6%
0-60°	13787 lm	87,1%
60-90°	2012 lm	12,7%
70-100°	686 lm	4,3%
90-120°	16 lm	0,1%
0-90°	15799 lm	99,8%
90-180°	28 lm	0,2%
0-180°	15826 lm	100,0%

### BUG rating

	Lumen	% Total
<b>Forward light</b>		
Low(0-30°)	1946 lm	12,3%
Medium(30-60°)	4933 lm	31,2%
High(60-80°)	935 lm	5,9%
Very high(80-90°)	84 lm	0,5%
<b>Back light</b>		
Low(0-30°)	1946 lm	12,3%
Medium(30-60°)	4933 lm	31,2%
High(60-80°)	935 lm	5,9%
Very high(80-90°)	84 lm	0,5%
<b>Uplight</b>		
Low(90-100°)	15 lm	0,1%
High(100-180°)	15 lm	0,1%

## IESNA TM-15-07 Luminaire Classification System For Outdoor Luminaires

**BUG rating B3 U2 G1**

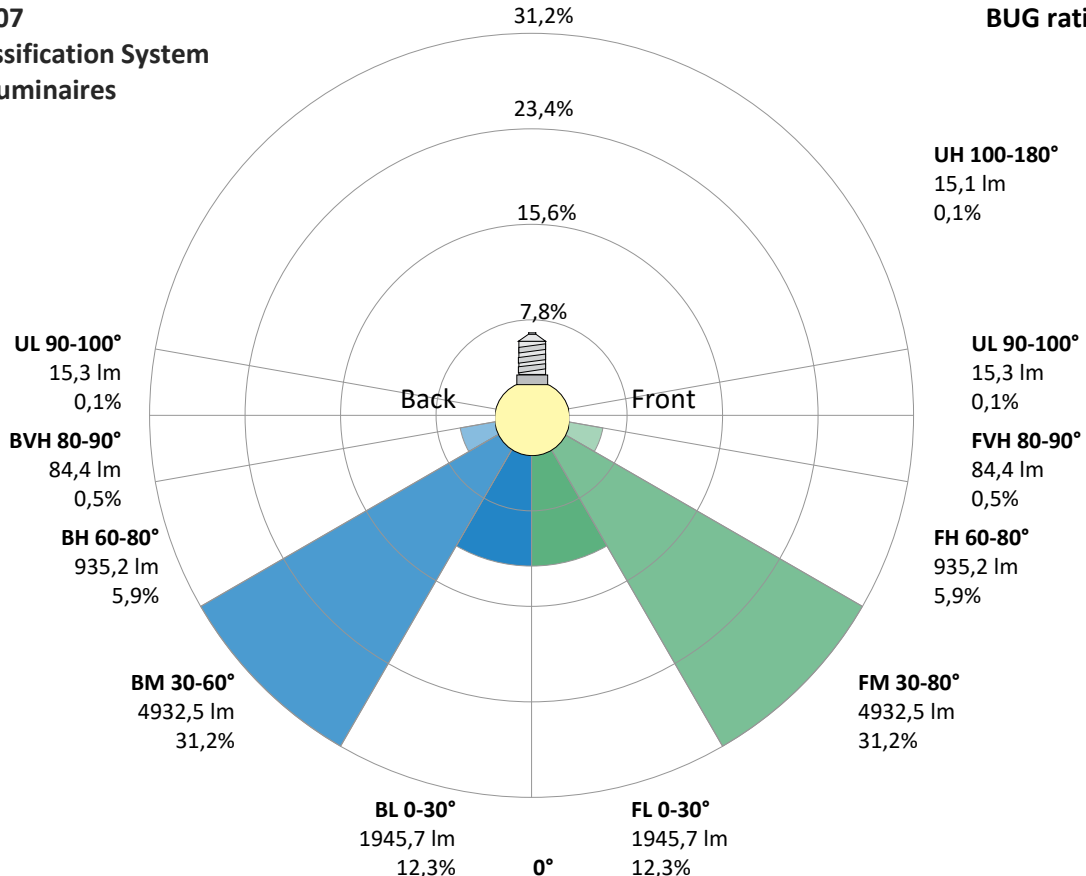

# Light Measurement Report

Print date: 25-9-2025

Measurement date and time: 25-9-2025 13:41:45 – Measurement no. VFR-250925-3365-MS

Measurement tracking No. and Link: [VT250925-007862](#)

Operator:




## Power Details


### Input Power

Power feed to light source	115,4 W
Frequency of input power	50 Hz
RMS Input voltage feed, $V_{RMS}$	230 V
RMS Input current feed, $I_{RMS}$	0,512 A
Volt-Ampere or apparent power = $V_{RMS} * I_{RMS}$	117,84 VA
Displacement factor of AC power feed	0,98
Power factor of AC current feed	0,98
Total harmonic distortion of the current	4,25%
Total harmonic distortion of the voltage	0,06%

### Input Power Curve

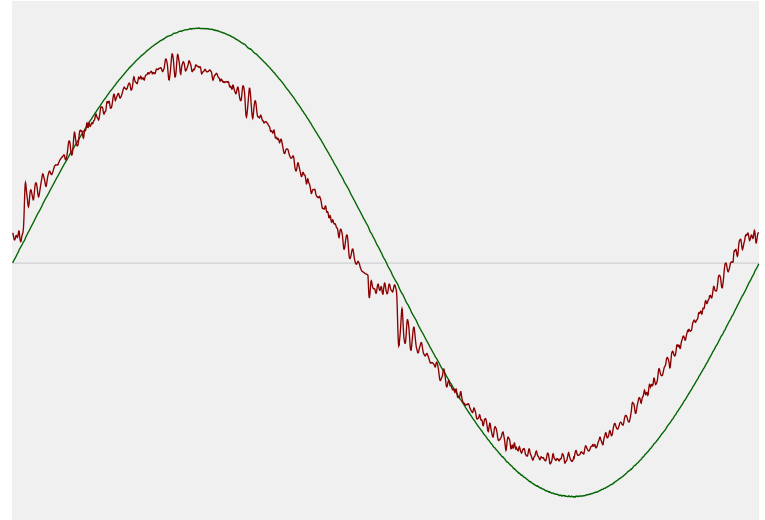

### Efficiency

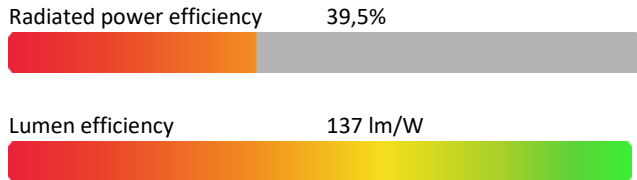

## Stabilization Details

### Warmup Conditions

Stable period	15 min
Stable change max	2,0%
Minimum time	15 min

### Color Temperature Change

CCT start	3992 K
CCT shift	+8 K
CCT end	4000 K


### Warmup Result

Total warmup time	Lamp stabilized in 15 min 3 sec
Warmup variation	-0,6%

### Output Change

Output start	15921 lm
Output change	-95 lm
Output end	15826 lm

### Stabilization Curve

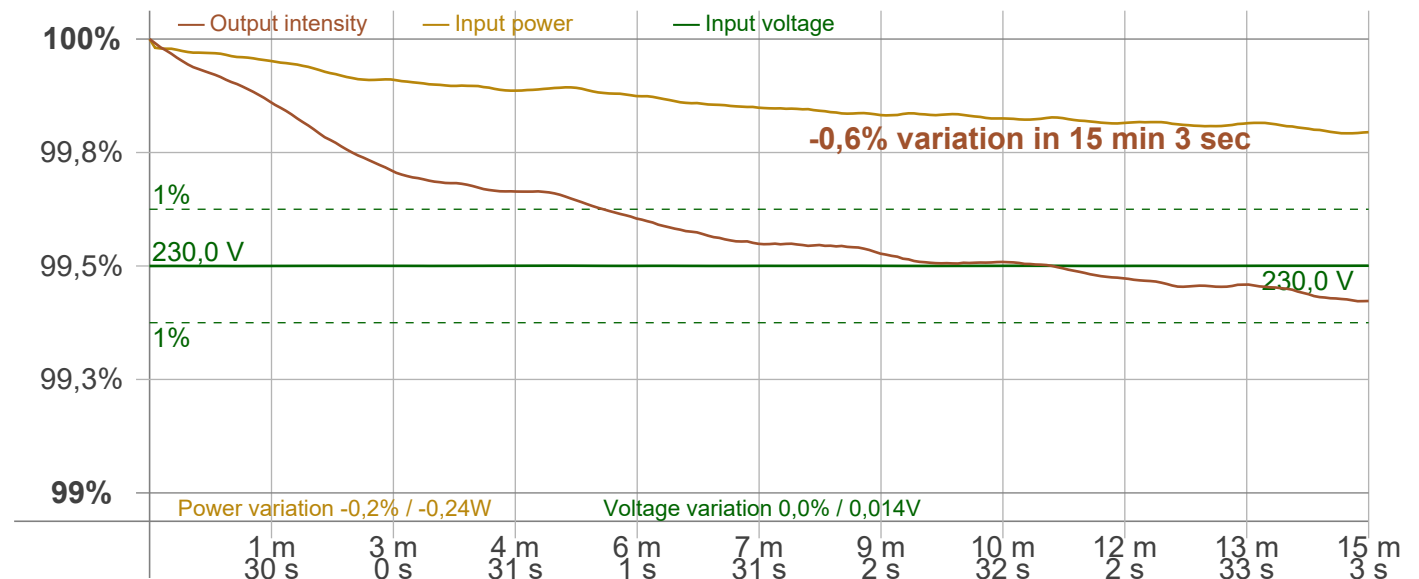

# Light Measurement Report

Print date: 25-9-2025

Measurement date and time: 25-9-2025 13:41:45 – Measurement no. VFR-250925-3365-MS

Measurement tracking No. and Link: [VT250925-007862](https://www.viso-systems.com/VT250925-007862)

Operator:



## Flicker /TLA details

Flicker Meter Type: Viso Systems LabFlicker  
 Frequency of input power: 50 Hz  
 Flicker/TLA sample rate: 20000 samples/s

**Measurement time**  
 PstLM: 180 sec  
 All other indices: 1,2 sec

### Flicker indices according to Illuminating Engineering Society (IES)

Flicker frequency: 540,54 Hz  
 Percent Flicker: 0,43 %  
 Flicker index: 0

### Flicker indices according to California Energy Commission (CEC) 2016b

JA8/10 40 Hz: 0,21 %  
 JA8/10 90 Hz: 0,21 %  
 JA8/10 200 Hz: 0,28 %  
 JA8/10 400 Hz: 0,31 %  
 JA8/10 1000 Hz: 0,43 %


### TLA indices (re IEC TR 61547-1, IEC 61000-3-3 and IEC 61000-4-15)

PstLM value (F < 80 Hz): 0,1  
 SVM value (80 < F < 2000 Hz): 0


### Flicker indices according to Lighting Research Center (2015)

Perception metric, Assist Mp: 0,04

### Flicker frame (frame of one flicker period in time domain)

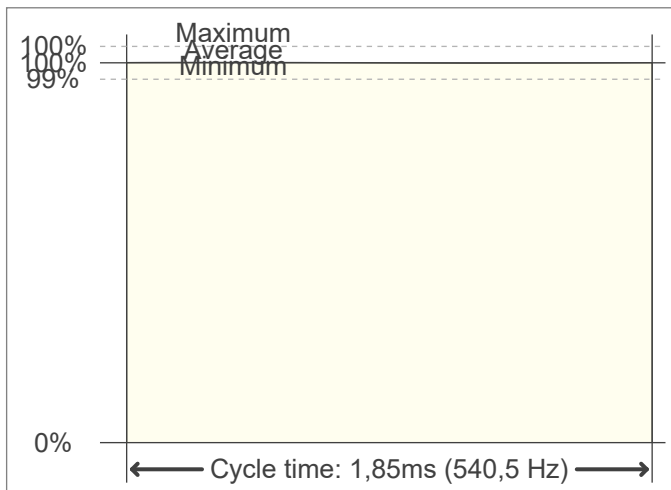

### Flicker FFT (flicker curve in frequency domain)

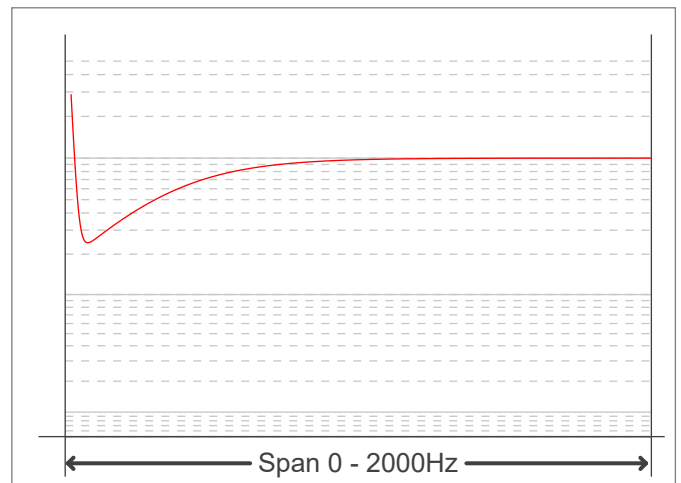

### IEEE 1789 Frequency/modulation plot

