

# INSTALLATION MANUAL

## LED STREET LIGHT

### Technical Specifications:

Voltage range: 200-240 V

Frequency: 50 Hz

Lighting color temperature: 4000 / 6000 K

Color transmittance index: Ra≥80

Beam angle: 70-140 °

Operating temperature range: -35°C to +45°C

Life Span: 30,000 hours

Protection against dust and moisture: IP66

Dispersion material: PC

Housing material: Aluminum (AL)



ARTICLE NO.	MODEL	COLOR	POWER	INPUT VOLTAGE	LUMEN	SIZE (mm)	KELVIN
808242	STREET LIGHT	GREY	30W	200-240V	3600 lm	410×165×35 (■60)	6000K
808259	STREET LIGHT	GREY	30W	200-240V	3600 lm	410×165×35 (■60)	4000K
808266	STREET LIGHT	GREY	50W	200-240V	4500 lm	465×160×35 (■60)	6000K
808273	STREET LIGHT	GREY	50W	200-240V	4500 lm	465×160×35 (■60)	4000K
808280	STREET LIGHT	GREY	100W	200-240V	9000 lm	560×200×39 (■60)	6000K
808297	STREET LIGHT	GREY	100W	200-240V	9000 lm	560×200×39 (■60)	4000K
812690	STREET LIGHT	GREY	150W	200-240V	13,500 lm	595×223×39 (■60)	4000K
812706	STREET LIGHT	GREY	200W	200-240V	18,000 lm	683×260×39 (■60)	4000K

### Imported by:

Dutchfulfillment Postbox 1819  
5602CA Eindhoven Netherlands  
info@dutchfulfillment.nl



### Installation Steps:

- Carefully unpack the lamp and protect it from cardboard packaging. (Figure 1)  
**Ensure the power is turned off during installation.**  
**Only qualified personnel should install this product.**

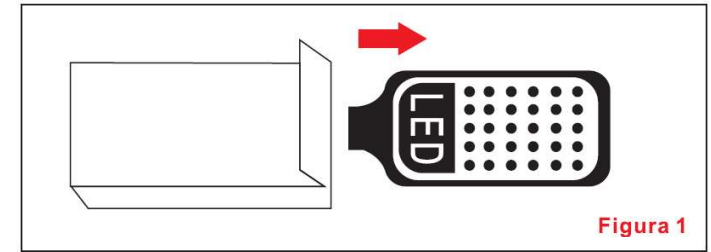
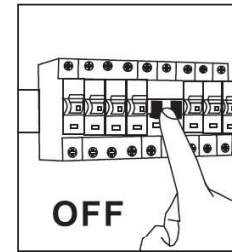


Figura 1

- Once the lamp is completely removed from the package, attach it firmly to the bracket/ tube (not included), insert and attach it to the base of the lamp, and then tighten it, so that the light spectrum can be directed to the desired position and area. (Figure2)

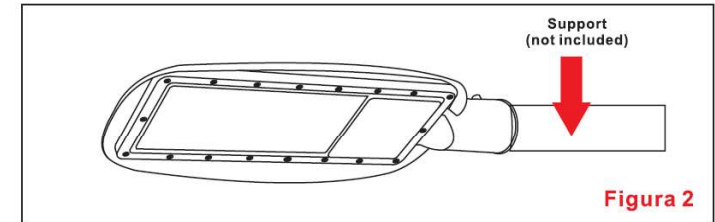


Figura 2

- There are 3 cables (brown, green, yellow and blue) on the base of the lamp to connect to the power line. When connecting cables, attention should be paid to correct bias: brown cables should be connected to lines, green and yellow cables should be connected to ground, and neutral blue cables. (Figure 3)


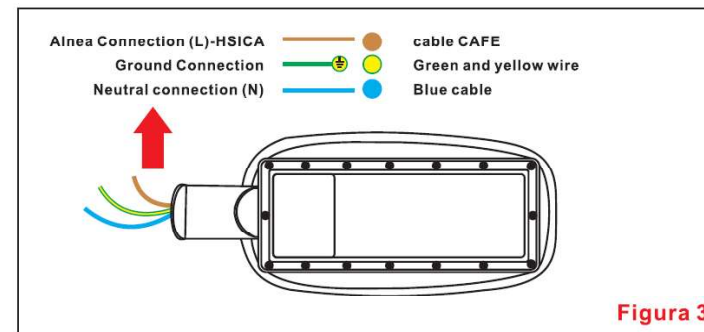


Figura 3



- Figure 1: Disconnect power before installation
- Figure 2: Mounting bracket attachment (support not included)
- Figure 3: Wiring guide: brown (L), green/yellow (PE), blue (N)