

# Light Measurement Report

Print date: 5-9-2025

Measurement date and time: 4-9-2025 15:07:10 – Measurement no. VFR-250904-2934-MS

Measurement tracking No. and Link: [VT250904-007648](#)

Operator:



## Laboratory and Equipment

Laboratory Owner and Location  
Goniospectrometer System and Type  
Sensor Name, Calibr. Date and Serial No.  
Spectrometer Manufacturer and Model

Viso Systems, Copenhagen V, Denmark  
LabSpion – Type C, horizontal  
LabSensor Model2 – 11-1-2024 – 3130191315  
Ibsen Photonics, Denmark – Freedom VIS (Custom Viso)

## Measurement Conditions

Number of C-planes and Resolution  
 $\gamma$  (gamma)-Resolution  
Test Distance  
Input Power, Power and Displ. Factors  
Input RMS Voltage and Current  
Frequency of Input Power  
Warm-up Time and Variation

12 planes – 30°  
2,5°  
12,10 m  
76,3 W – PF 0,98 – DPF 0,99  
230 V – 0,337 A  
50 Hz  
Lamp stabilized in 15 min 1 sec – 2,0%

## Tested Light Source



Product Name  
Item No. and Manufacturer  
Product Description (line 1)

813789-5700K  
813789-5700K – Dutchfulfillment  
LICHTLIJN MODULE | JUPITER | 65-80W | 90° | CCT-SWITCH

## Main Light Measurement Results

Output – Total Lumen (Up% / Down%)  
Efficiency  
Peak Intensity and Beam Angle  
Correlated Color Temperature, Target/Measured  
Color Rendering Index  
Color Rendering TM30-18  
Color Shift, CIE duv and MacAdam Steps  
Flicker

12506 lm – 0,95% / 99,05%  
164 lm/W  
5642 cd – 93,8°  
CCT = 5700 K / 5692 K  
CRI 84,6  
 $R_f$  84,0 –  $R_g$  96,9  
Duv 0,0065 – SDCM 8,7  
SVM n/a – PstLM n/a

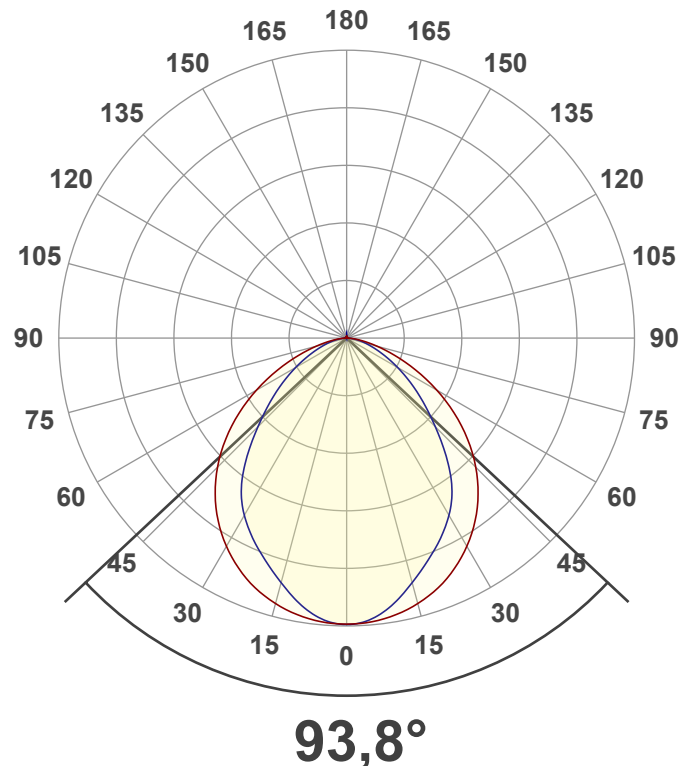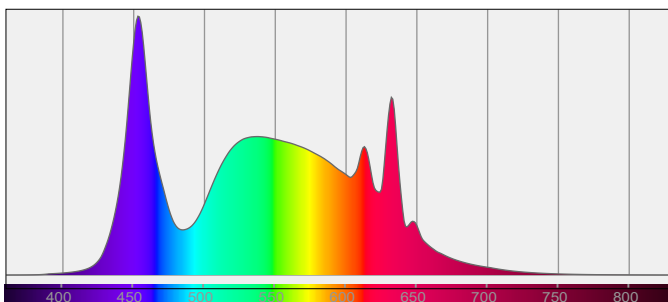

# Light Measurement Report

Print date: 5-9-2025

Measurement date and time: 4-9-2025 15:07:10 – Measurement no. VFR-250904-2934-MS


Measurement tracking No. and Link: [VT250904-007648](#)

Operator:



## Luminous Intensity diagram

Unit: 0-100% of peak intensity

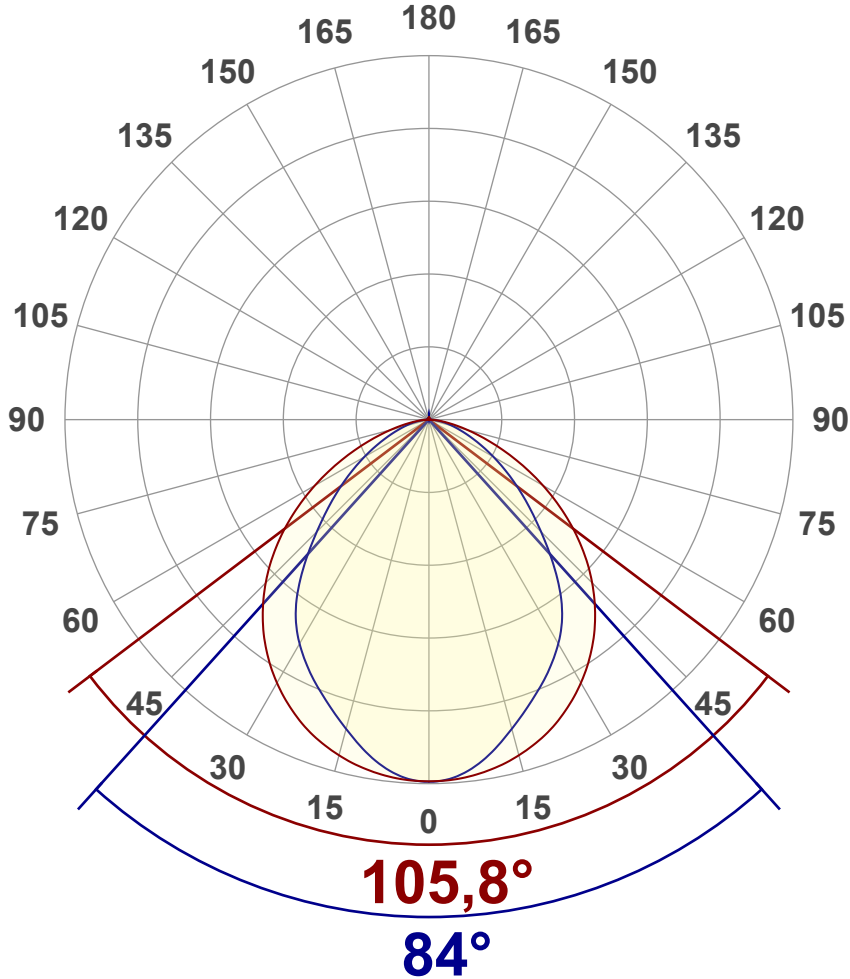

## Main Values

Output (total Lumen)	12506 lm
Lumen Up% / Down%	0,95% / 99,05%
Peak Intensity	5642 cd
Beam Angle (50%)	93,8°
Beam Angle (90%)	84°
Beam Angle (10%)	105,8°

## Cut-off Angle

Average 2,5%	167,7°
--------------	--------

## Field Angle

Average 10%	146°
-------------	------


## Intensity Ratio

In 120° cone	85,0%
In 90° cone	62,0%

**C000-C180**

**C090-C270**

## Linear distribution diagram - Intensity (candela) vs $\gamma$ -angle

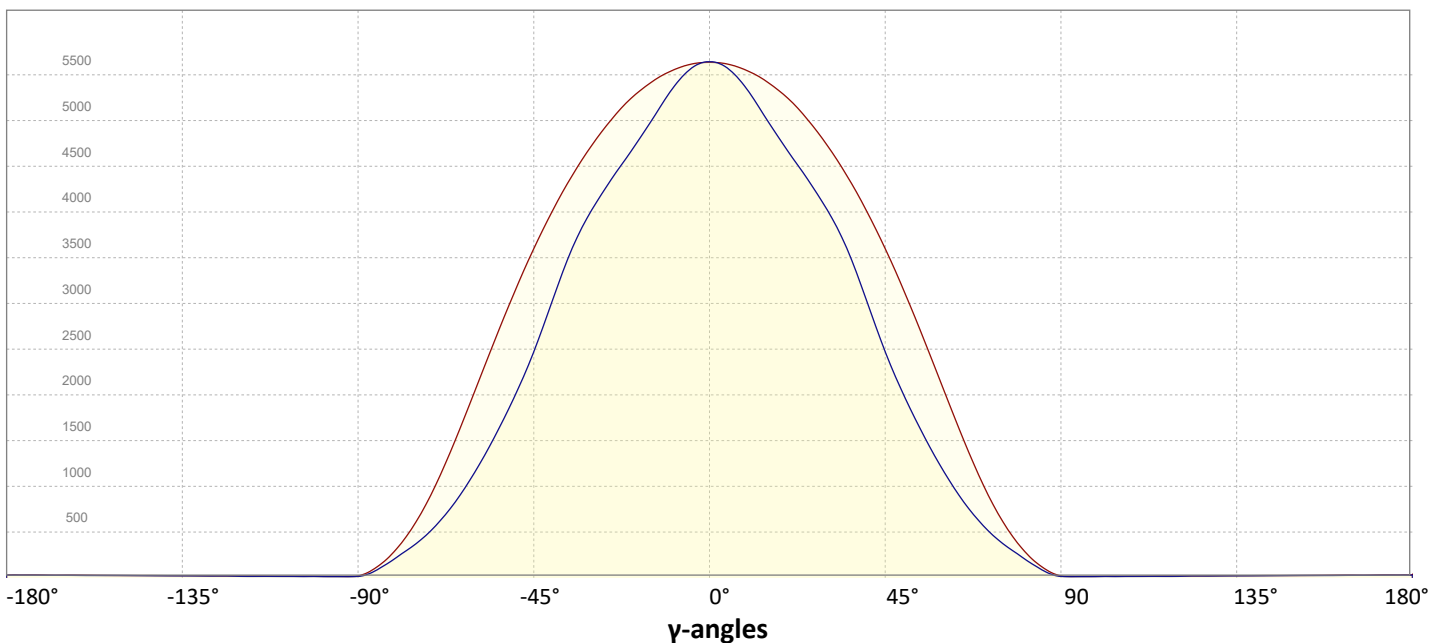

# Light Measurement Report

Print date: 5-9-2025


Measurement date and time: 4-9-2025 15:07:10 – Measurement no. VFR-250904-2934-MS

Measurement tracking No. and Link: [VT250904-007648](#)

Operator:



## Iso-intensity Diagram (Iso-candela)

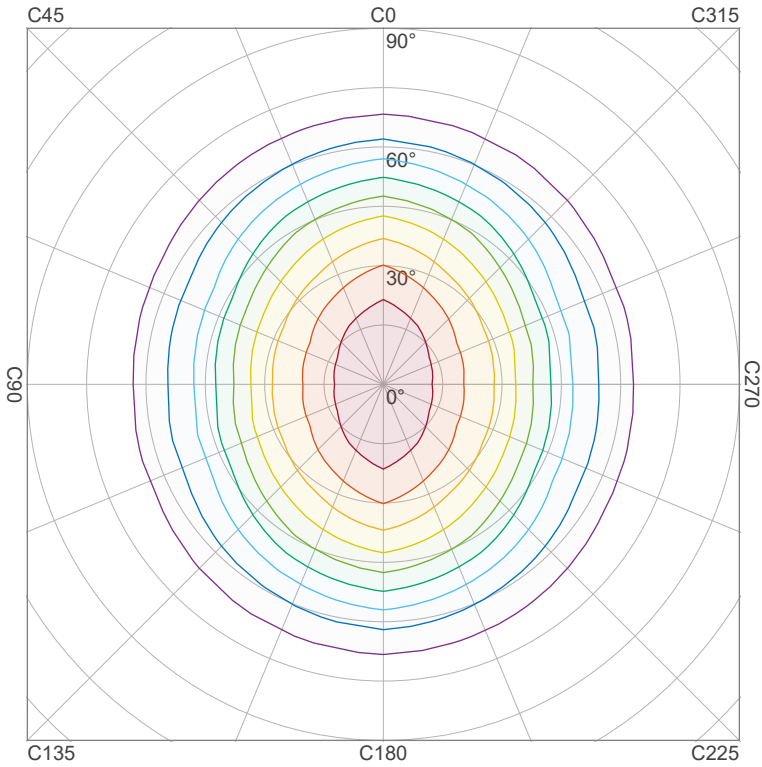


90 %	5075,4 cd
80 %	4511,4 cd
70 %	3947,5 cd
60 %	3383,6 cd
50 %	2819,7 cd
40 %	2255,7 cd
30 %	1691,8 cd
20 %	1127,9 cd
10 %	563,9 cd

Peak intensity: 5639,3 cd

Number of c-planes: 12

## Iso-illuminance Diagram (Iso-lux)

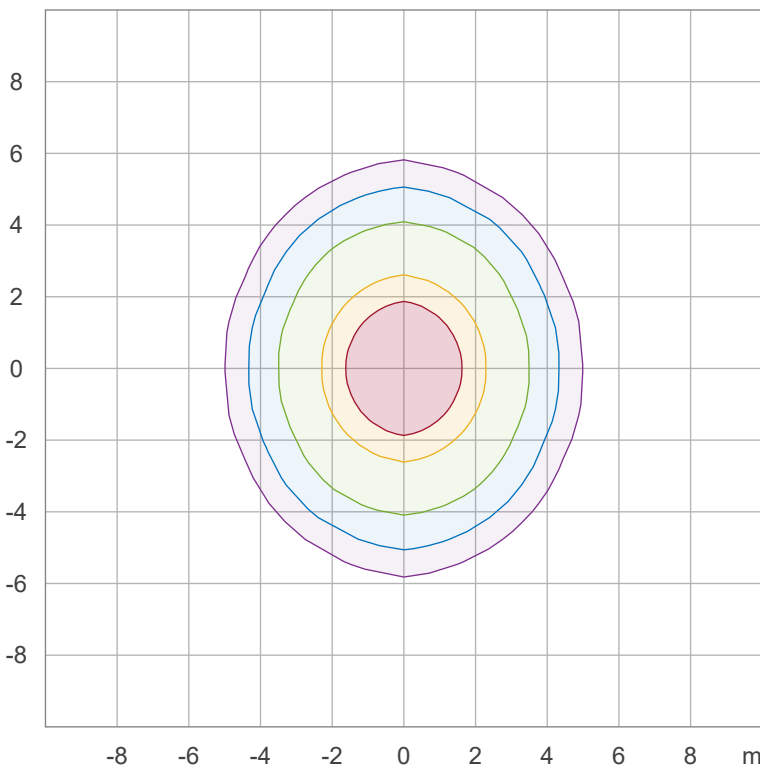

50,0 %	313,3 lx
30,0 %	188,0 lx
10,0 %	62,7 lx
5,0 %	31,3 lx
3,0 %	18,8 lx

Peak illuminance: 626,6 lx

Mounting height: 3,0 m

Number of c-planes: 12

# Light Measurement Report

Print date: 5-9-2025

Measurement date and time: 4-9-2025 15:07:10 – Measurement no. VFR-250904-2934-MS

Measurement tracking No. and Link: [VT250904-007648](#)

Operator:




## Color details


Correlated Color Temperature, Target CCT = 5700 K  
 Correlated Color Temperature, Measured CCT = 5692 K  
 Color Rendering Index CRI 84,6  
 Color Rendering Index, R9 (red component) R9 = 37,0  
 Color Rendering TM30-18 R<sub>f</sub> 84,0 – R<sub>g</sub> 96,9  
 Color Quality Scale CQS = 83,3

MacAdam Steps SDCM = 8,7  
 Color coordinates CIE 1931 (x;y) = (0,328;0,337)  
 Color coordinate CIEs 1960 (u;v) = (0,205;0,317)  
 Color deviation from BBL Duv = 0,0065  
 Color coordinate CIEs 1976 (CIELUV) (u';v') = (0,205;0,475)


### CIE 1931

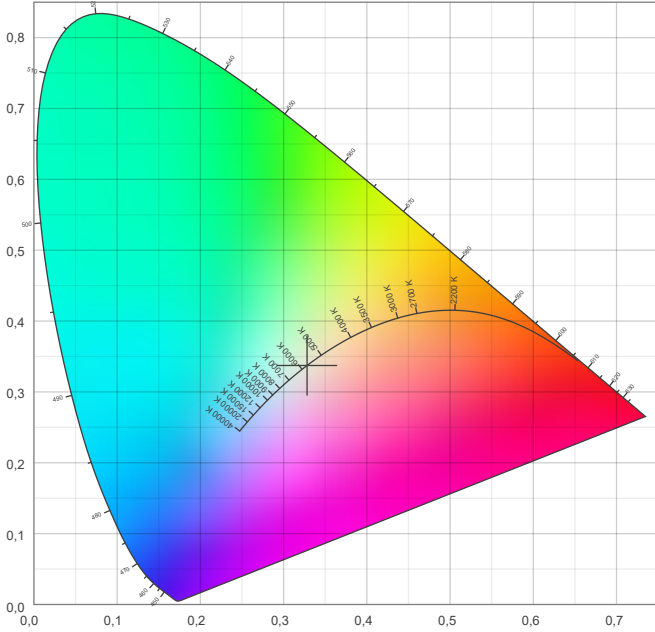

### CIE 1931 – zoomed on Planckian locus

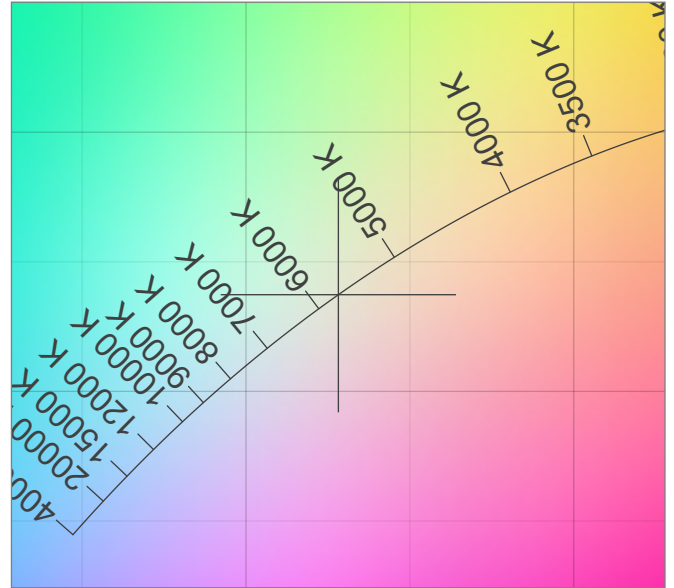


### Color Rendering Index per reference color (CIE 1995)

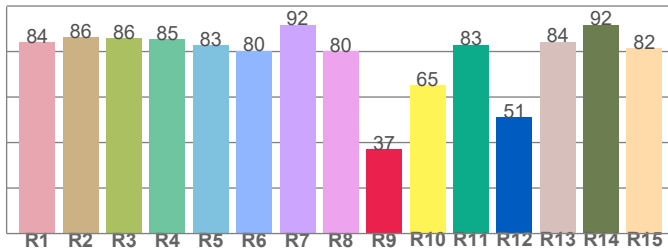


CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
84,1	86,3	85,8	85,3	82,7	80,4	91,8	80,2	37,0	65,3	83,0	51,1	84,3	91,8	81,5

### Spectral power distribution (SPD) / W/nm – 0-100%

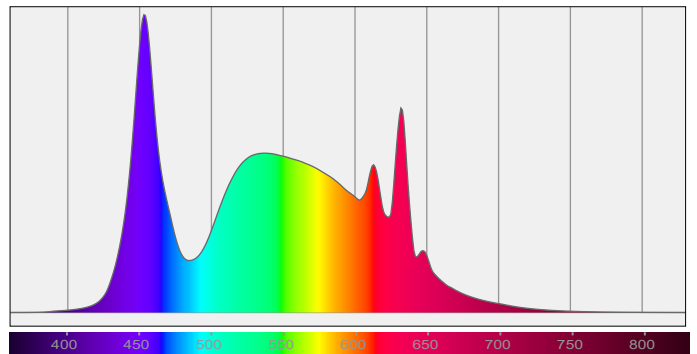


### TM30-18 R<sub>f</sub>-values per hue bin

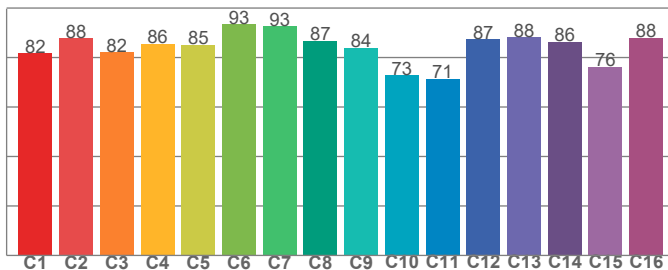

TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
81,7	87,9	82,2	85,6	85,2	93,4	92,5	86,8	84,0	72,9	71,4	87,3	88,2	86,3	76,2	88,0

### Color Quality Scale by reference color

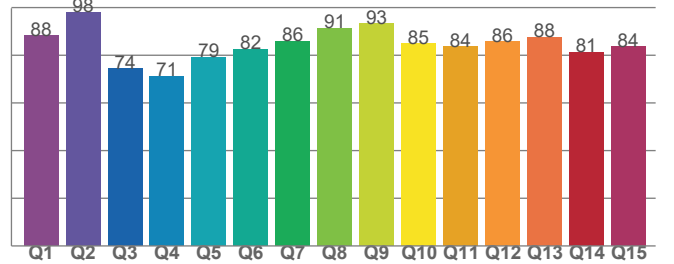

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
88,2	98,0	74,4	71,3	79,2	82,5	85,8	91,3	93,3	84,9	83,6	85,7	87,6	81,2	83,5

# Light Measurement Report

Print date: 5-9-2025


Measurement date and time: 4-9-2025 15:07:10 – Measurement no. VFR-250904-2934-MS

Measurement tracking No. and Link: [VT250904-007648](https://www.viso-systems.com/VT250904-007648)

Operator:



## Beam Details

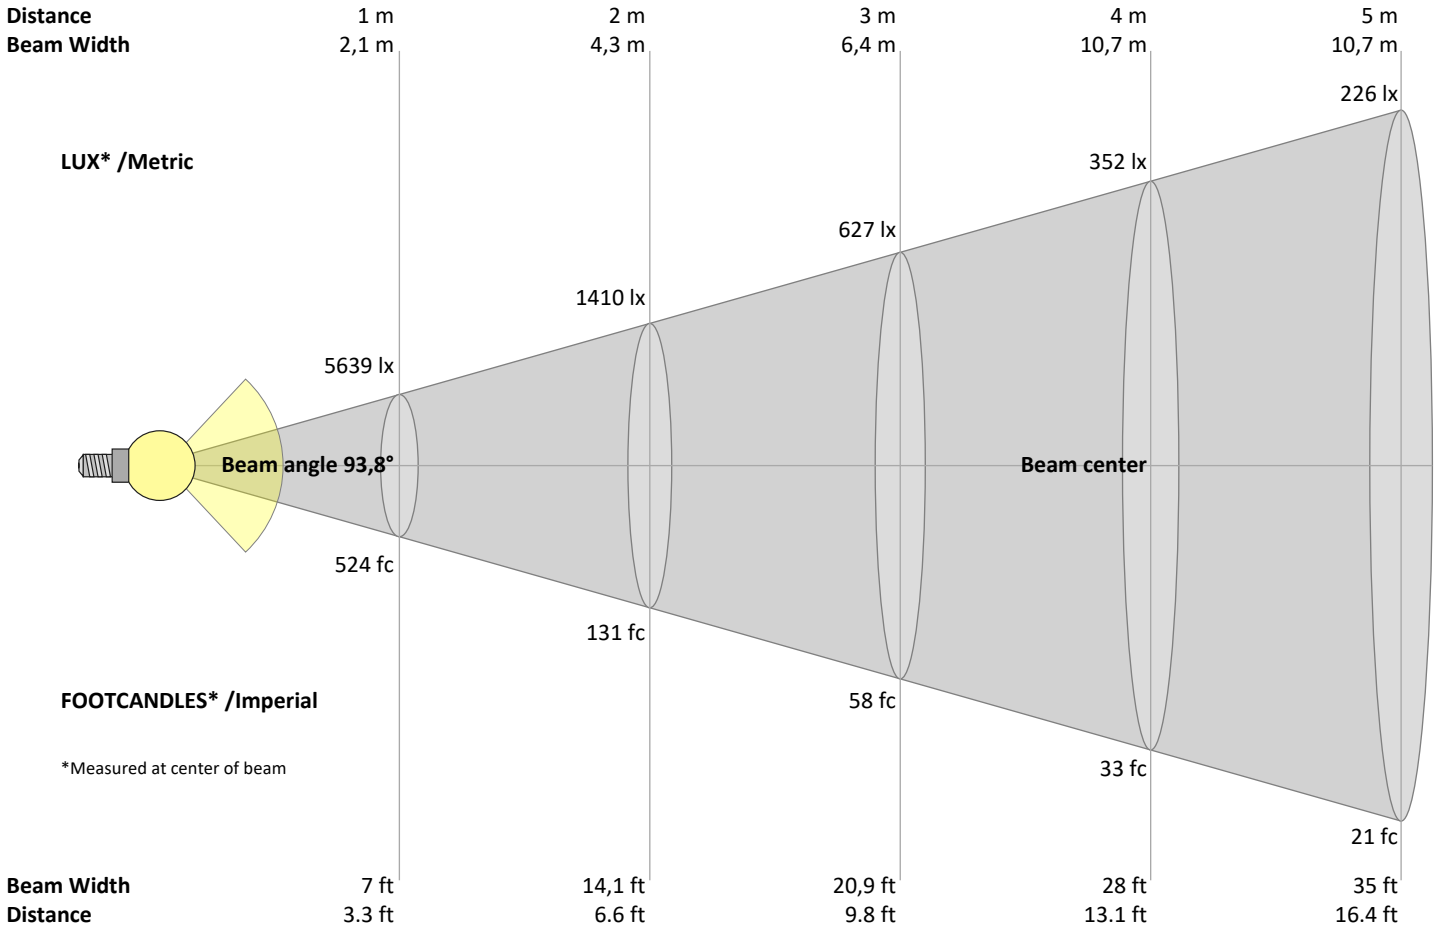

### Beam intensities from 1 – 20 m

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	m
3,3	6,6	9,8	13,1	16,4	19,7	23	26,2	29,5	32,8	36,1	39,4	42,7	45,9	49,2	52,5	55,8	59,1	62,3	65,6	ft
5639	1410	627	352	226	157	115	88	70	56	47	39	33	29	25	22	20	17	16	14	lux
523,9	131	58,2	32,7	21	14,6	10,7	8,2	6,5	5,2	4,3	3,6	3,1	2,7	2,3	2	1,8	1,6	1,5	1,3	fc

### Intensities in 0° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°	γ
5639	5613	5538	5415	5245	5016	4737	4408	4029	3597	3115	2594	2051	1515	1025	622	323	124	21	15	cd
100%	100%	98%	96%	93%	89%	84%	78%	71%	64%	55%	46%	36%	27%	18%	11%	6%	2%	0%	0%	of 0°val

### Intensities in 90° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°	γ
5639	5554	5315	4989	4670	4364	4030	3613	3057	2474	1976	1545	1164	837	576	379	227	92	17	12	cd
100%	98%	94%	88%	83%	77%	71%	64%	54%	44%	35%	27%	21%	15%	10%	7%	4%	2%	0%	0%	of 0°val

### Intensities in 180° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°	γ
5639	5613	5538	5415	5245	5016	4737	4408	4029	3597	3115	2594	2051	1515	1025	622	323	124	21	15	cd
100%	100%	98%	96%	93%	89%	84%	78%	71%	64%	55%	46%	36%	27%	18%	11%	6%	2%	0%	0%	of 0°val

### Intensities in 270° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°	γ
5639	5554	5315	4989	4670	4364	4030	3613	3057	2474	1976	1545	1164	837	576	379	227	92	17	12	cd
100%	98%	94%	88%	83%	77%	71%	64%	54%	44%	35%	27%	21%	15%	10%	7%	4%	2%	0%	0%	of 0°val

# Light Measurement Report

Print date: 5-9-2025

Measurement date and time: 4-9-2025 15:07:10 – Measurement no. VFR-250904-2934-MS

Measurement tracking No. and Link: [VT250904-007648](#)

Operator:



## Light Planning – UGR table

Uncorrected, comprehensive UGR table according to 117-1995

Reflectances		70	70	50	50	30	70	70	50	50	30
	ρ Ceiling	70	70	50	50	30	70	70	50	50	30
	ρ Walls	50	30	50	30	30	50	30	50	30	30
	ρ Floor	20	20	20	20	20	20	20	20	20	20
Room size		Viewed Crosswise					Viewed Endwise				
H = mounting height above eye level		(Viewing direction orthogonal to lamp length axis)					(Viewing direction parallel to lamp length axis)				
X	Y										
2H	2H	27,2	28,3	27,4	28,6	28,8	25,4	26,5	25,6	26,8	27,0
	3H	28,1	29,2	28,5	29,5	29,7	26,1	27,2	26,5	27,5	27,7
	4H	28,3	29,4	28,8	29,7	30,0	26,3	27,4	26,8	27,7	28,0
	6H	28,6	29,5	28,9	29,8	30,2	26,6	27,6	26,9	27,9	28,3
	8H	28,6	29,5	28,9	29,8	30,2	26,7	27,6	27,0	27,9	28,3
	12H	28,5	29,4	28,9	29,8	30,2	26,7	27,6	27,1	27,9	28,4
4H	2H	27,4	28,4	27,8	28,7	29,0	25,8	26,9	26,3	27,2	27,5
	3H	28,5	29,4	28,9	29,8	30,2	26,8	27,7	27,2	28,1	28,5
	4H	28,8	29,6	29,3	30,1	30,6	27,1	27,9	27,5	28,3	28,9
	6H	29,0	29,8	29,5	30,2	30,6	27,4	28,2	27,9	28,5	28,9
	8H	29,1	29,8	29,6	30,2	30,6	27,5	28,2	28,0	28,6	29,0
	12H	29,1	29,7	29,6	30,1	30,6	27,5	28,1	28,0	28,5	29,0
8H	4H	28,9	29,6	29,4	30,0	30,4	27,3	28,0	27,8	28,4	28,8
	6H	29,2	29,7	29,7	30,2	30,7	27,6	28,2	28,1	28,6	29,2
	8H	29,3	29,7	29,8	30,3	30,9	27,8	28,3	28,3	28,8	29,4
	12H	29,3	29,7	29,9	30,2	30,8	27,9	28,3	28,5	28,8	29,4
12H	4H	28,8	29,4	29,3	29,9	30,3	27,2	27,8	27,7	28,3	28,8
	6H	29,2	29,7	29,7	30,2	30,8	27,7	28,1	28,2	28,7	29,3
	8H	29,3	29,7	29,9	30,2	30,8	27,8	28,2	28,4	28,7	29,3

### Variations with the observer position for the luminaire spacings, S:

S = 1.0H	0,1 / -0,2	0,2 / -0,3
S = 1.5H	0,5 / -0,7	0,5 / -0,8
S = 2.0H	1,3 / -1,6	1,0 / -1,5

## Coefficients of Utilization

Ceiling reflectance	80			70			50			30			10			0		
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio)																	
	Room Values are expressed as percentage of Lumen delivered to the task surface																	
0	119	119	119	119	116	116	116	116	111	111	106	106	106	101	101	101	99	
1	110	106	102	98	107	103	100	97	99	96	93	95	93	90	91	89	88	86
2	101	93	87	82	98	91	86	81	88	83	79	84	81	77	81	78	75	73
3	93	83	76	70	90	81	74	69	78	72	68	76	71	66	73	69	65	63
4	85	74	66	60	83	73	65	59	70	64	59	68	62	58	66	61	57	55
5	79	67	58	52	77	66	58	52	64	57	51	61	55	51	60	54	50	48
6	73	61	52	46	71	60	52	46	58	51	45	56	50	45	54	49	44	43
7	68	55	47	41	66	54	46	41	53	46	41	51	45	40	50	44	40	38
8	63	51	42	37	62	50	42	37	48	41	37	47	41	36	46	40	36	34
9	59	47	39	33	58	46	38	33	45	38	33	44	37	33	43	37	33	31
10	56	43	36	30	54	43	35	30	42	35	30	41	34	30	40	34	30	28

# Light Measurement Report

Print date: 5-9-2025

Measurement date and time: 4-9-2025 15:07:10 – Measurement no. VFR-250904-2934-MS

Measurement tracking No. and Link: [VT250904-007648](#)


Operator:



## Luminaire budgetary diagram

Uncorrected, comprehensive UGR table according to 117-1995

LAMPS (number of lamps)

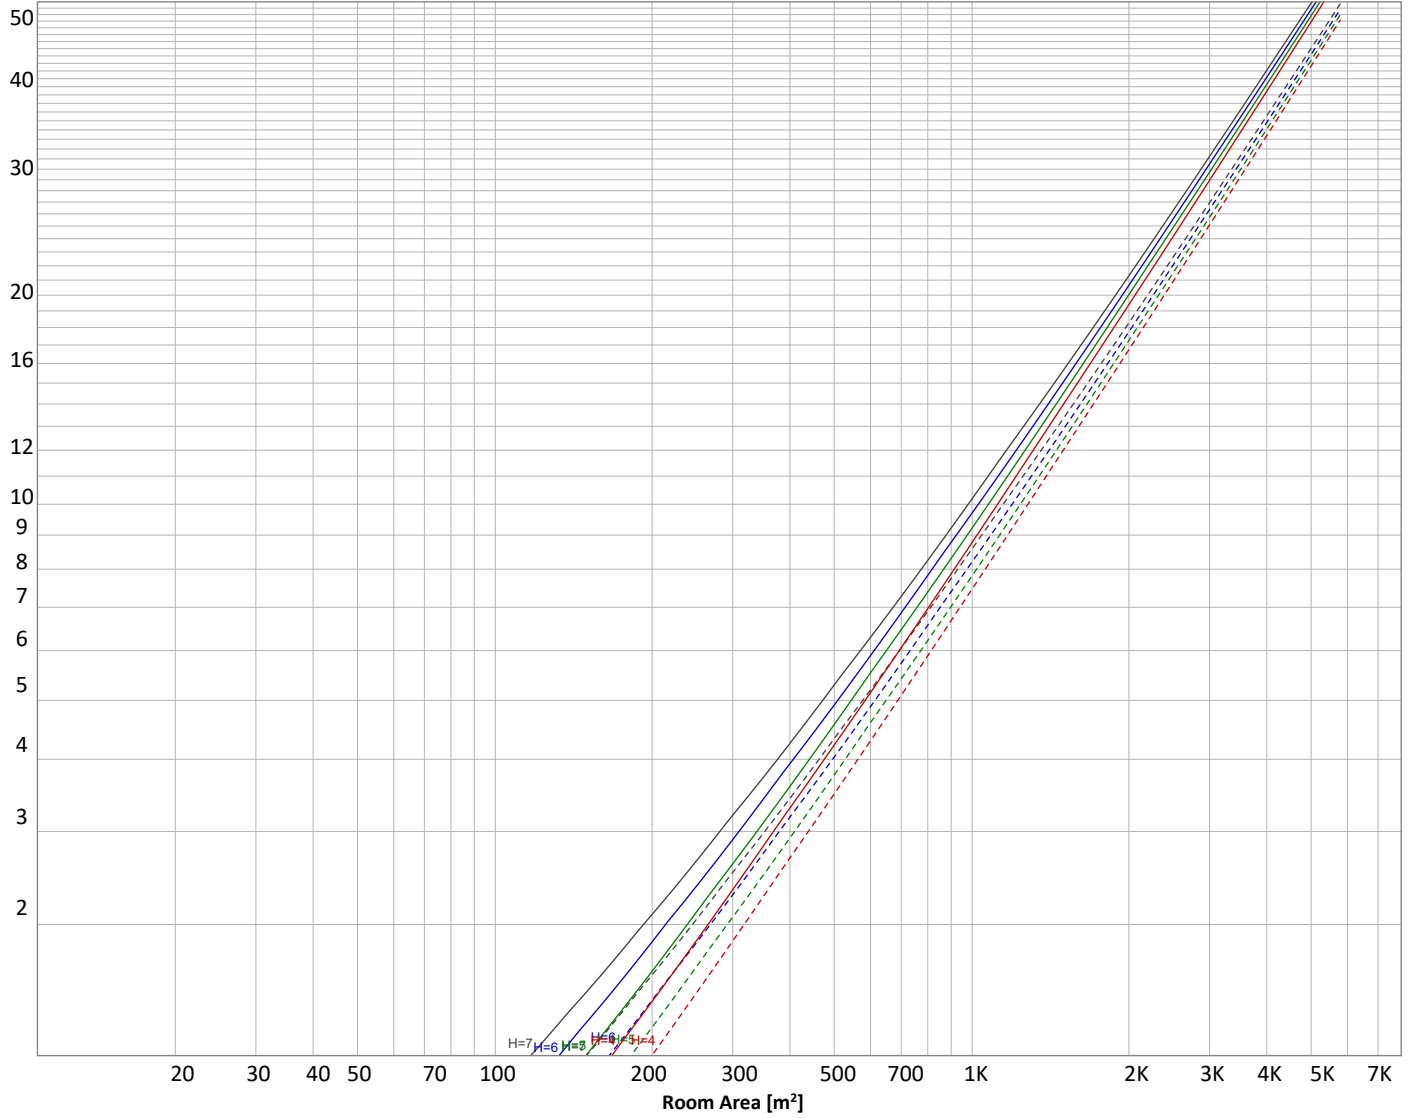

### Conditions

H = Room height	Flux = 12506 lm			
H <sub>down</sub> = Lamp distance from ceiling =	0.00 m	Line type	Ceiling reflectance	ρ(%) Wall reflectance
H <sub>work</sub> = Work area height from floor =	0.00 m	-----	70	50
E <sub>work</sub> = Average lux on work area =	100 lx	—————	50	30
				Floor reflectance
				20

### Zonal Lumen Summary

0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
528 lm	1460 lm	2125 lm	2448 lm	2299 lm	1776 lm	1104 lm	517 lm	130 lm
90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
15,1 lm	16,0 lm	16,9 lm	17,4 lm	16,6 lm	14,8 lm	11,8 lm	7,81 lm	2,71 lm

# Light Measurement Report

Print date: 5-9-2025

Measurement date and time: 4-9-2025 15:07:10 – Measurement no. VFR-250904-2934-MS

Measurement tracking No. and Link: [VT250904-007648](#)

Operator:



## Outdoor Light Planning

### Lumen per Zone

Zone (γ)	Lumen	% Total
0-10°	528 lm	4,2%
10-20°	1460 lm	11,7%
20-30°	2125 lm	17,0%
30-40°	2448 lm	19,6%
40-50°	2299 lm	18,4%
50-60°	1776 lm	14,2%
60-70°	1104 lm	8,8%
70-80°	517 lm	4,1%
80-90°	130 lm	1,0%
90-100°	15 lm	0,1%
100-110°	16 lm	0,1%
110-120°	17 lm	0,1%
120-130°	17 lm	0,1%
130-140°	17 lm	0,1%
140-150°	15 lm	0,1%
150-160°	12 lm	0,1%
160-170°	8 lm	0,1%
170-180°	3 lm	0,0%
<b>Total</b>	<b>12506 lm</b>	<b>100,0%</b>

### Intensity peaks

Max intensity	5642 cd
Intensity, 90°	21 cd
Intensity, 0°	5639 cd

### Zonal Lumen summary


Zone (γ)	Lumen	% Total
0-30°	4113 lm	32,9%
0-40°	6561 lm	52,5%
0-60°	10636 lm	85,0%
60-90°	1751 lm	14,0%
70-100°	662 lm	5,3%
90-120°	48 lm	0,4%
0-90°	12387 lm	99,0%
90-180°	119 lm	1,0%
0-180°	12506 lm	100,0%

### BUG rating

	Lumen	% Total
<b>Forward light</b>		
Low(0-30°)	2056 lm	16,4%
Medium(30-60°)	3260 lm	26,1%
High(60-80°)	812 lm	6,5%
Very high(80-90°)	66 lm	0,5%
<b>Back light</b>		
Low(0-30°)	2056 lm	16,4%
Medium(30-60°)	3260 lm	26,1%
High(60-80°)	812 lm	6,5%
Very high(80-90°)	66 lm	0,5%
<b>Uplight</b>		
Low(90-100°)	15 lm	0,1%
High(100-180°)	104 lm	0,8%

## IESNA TM-15-07 Luminaire Classification System For Outdoor Luminaires

**BUG rating B3 U3 G1**

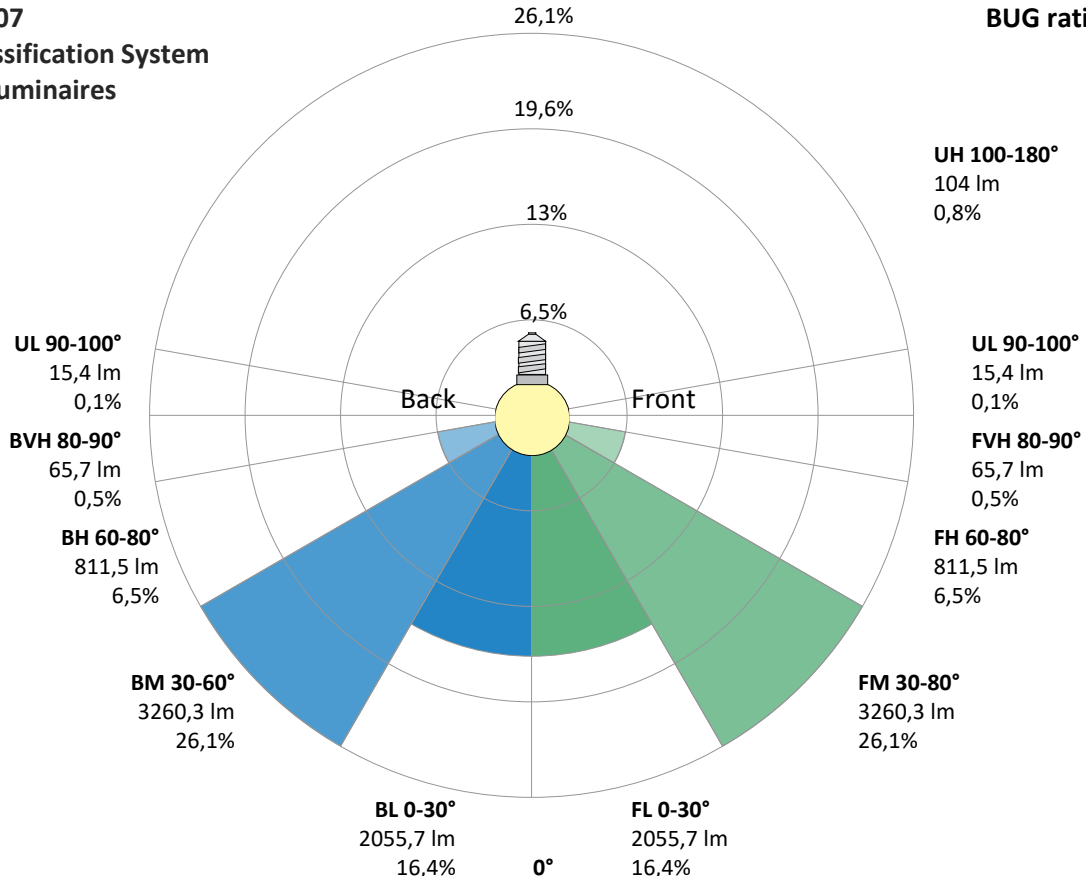

# Light Measurement Report

Print date: 5-9-2025

Measurement date and time: 4-9-2025 15:07:10 – Measurement no. VFR-250904-2934-MS

Measurement tracking No. and Link: [VT250904-007648](#)

Operator:




## Power Details


### Input Power

Power feed to light source	76,3 W
Frequency of input power	50 Hz
RMS Input voltage feed, $V_{RMS}$	230 V
RMS Input current feed, $I_{RMS}$	0,337 A
Volt-Ampere or apparent power = $V_{RMS} * I_{RMS}$	77,5 VA
Displacement factor of AC power feed	0,99
Power factor of AC current feed	0,98
Total harmonic distortion of the current	6,21%
Total harmonic distortion of the voltage	0,06%

### Input Power Curve

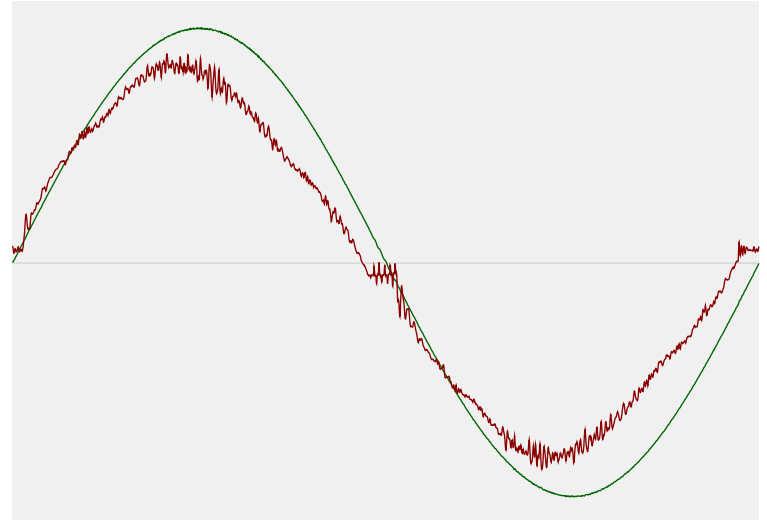

### Efficiency

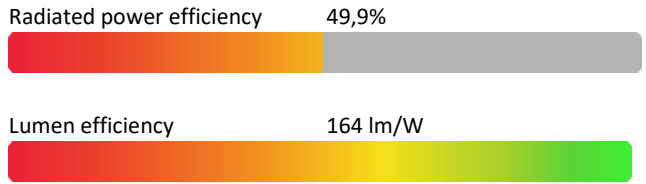

## Stabilization Details

### Warmup Conditions

Stable period	15 min
Stable change max	2,0%
Minimum time	15 min

### Color Temperature Change

CCT start	5699 K
CCT shift	+1 K
CCT end	5700 K


### Warmup Result

Total warmup time	Lamp stabilized in 15 min 1 sec
Warmup variation	-0,1%

### Output Change

Output start	12510 lm
Output change	-4 lm
Output end	12506 lm

### Stabilization Curve

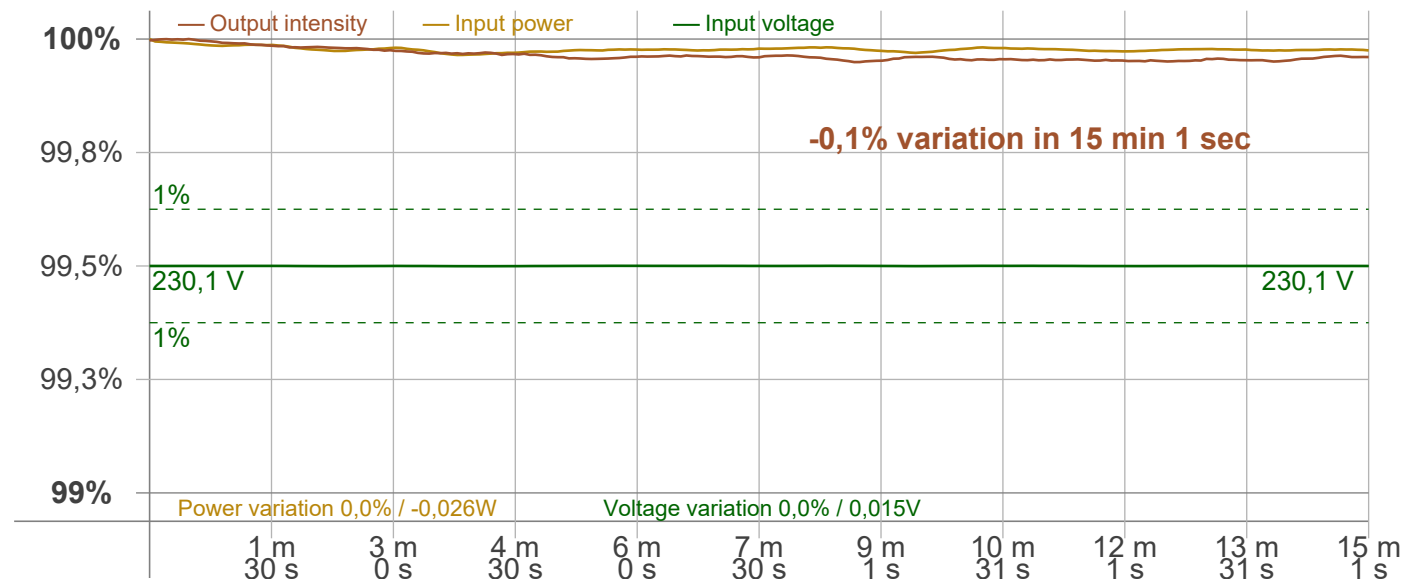

# Light Measurement Report

Print date: 5-9-2025

Measurement date and time: 4-9-2025 15:07:10 – Measurement no. VFR-250904-2934-MS

Measurement tracking No. and Link: [VT250904-007648](#)

Operator:



## Flicker /TLA details

Flicker Meter Type Viso Systems LabFlicker  
 Frequency of input power 50 Hz  
 Flicker/TLA sample rate n/a samples/s

**Measurement time**  
 PstLM 180 sec  
 All other indices 1,2 sec

### Flicker indices according to Illuminating Engineering Society (IES)

Flicker frequency n/a Hz  
 Percent Flicker n/a %  
 Flicker index n/a

### Flicker indices according to California Energy Commission (CEC) 2016b

JA8/10 40 Hz n/a %  
 JA8/10 90 Hz n/a %  
 JA8/10 200 Hz n/a %  
 JA8/10 400 Hz n/a %  
 JA8/10 1000 Hz n/a %

### TLA indices (re IEC TR 61547-1, IEC 61000-3-3 and IEC 61000-4-15)

PstLM value (F < 80 Hz) n/a  
 SVM value (80 < F < 2000 Hz) n/a

### Flicker indices according to Lighting Research Center (2015)

Perception metric, Assist Mp n/a

### Flicker frame (frame of one flicker period in time domain)



### Flicker FFT (flicker curve in frequency domain)



### IEEE 1789 Frequency/modulation plot

