

Light Measurement Report

Print date: 3-11-2025

Measurement date and time: 3-11-2025 09:35:08 – Measurement no. VFR-251103-3863-MS

Measurement tracking No. and Link: [VT251103-005537](#)

Operator:



Laboratory and Equipment

Laboratory Owner and Location
Goniospectrometer System and Type
Sensor Name, Calibr. Date and Serial No.
Spectrometer Manufacturer and Model

Viso Systems, Copenhagen V, Denmark
LabSpion – Type C, horizontal
LabSensor Model2 – 11-1-2024 – 3130191315
Ibsen Photonics, Denmark – Freedom VIS (Custom Viso)

Measurement Conditions

Number of C-planes and Resolution
 γ (gamma)-Resolution
Test Distance
Input Power, Power and Displ. Factors
Input RMS Voltage and Current
Frequency of Input Power
Warm-up Time and Variation

12 planes – 30°
5°
3,77 m
30,6 W – PF 0,84 – DPF 0,99
230 V – 0,159 A
50 Hz
Lamp stabilized in 15 min 1 sec – 2,0%

Tested Light Source



Product Name
Item No. and Manufacturer
Product Description (line 1)
| ZWART | DIMBAAR | CCT-SWITCH

813888-MEAT-30W
813888-MEAT-30W – Dutchfulfillment
3-FASE RAILSPOT | ROSALIN – FOOD | SLAGER – BAKKER | 10W-20W-30W

Main Light Measurement Results

Output – Total Lumen (Up% / Down%)
Efficiency
Peak Intensity and Beam Angle
Correlated Color Temperature, Target/Measured
Color Rendering Index
Color Rendering TM30-18
Color Shift, CIE duv and MacAdam Steps
Flicker

1384 lm – 0,13% / 99,87%
45 lm/W
3043 cd – 34°
CCT = 0 K / 0 K
CRI 0,0
 $R_f 0,0$ – $R_g 0,0$
Duv n/a – SDCM n/a
SVM 0,03 – PstLM 0,03

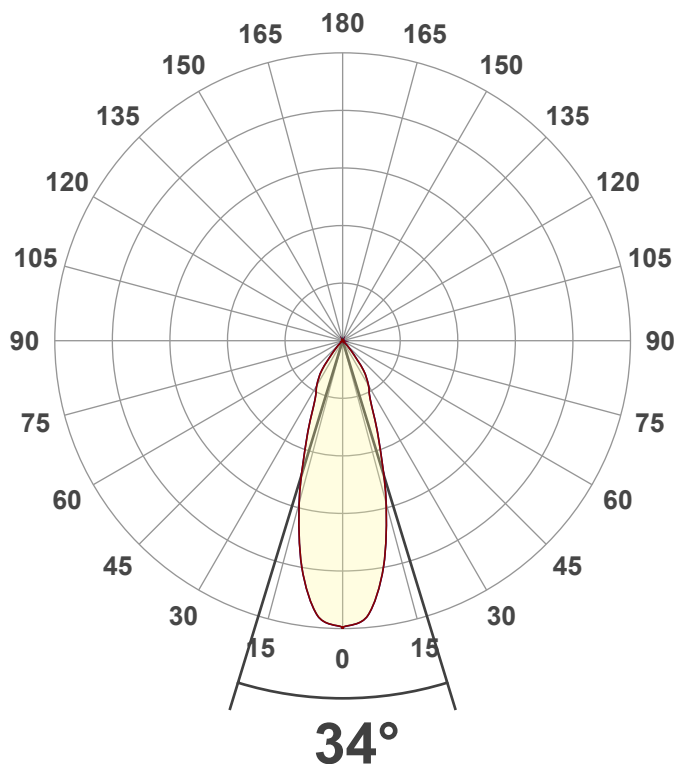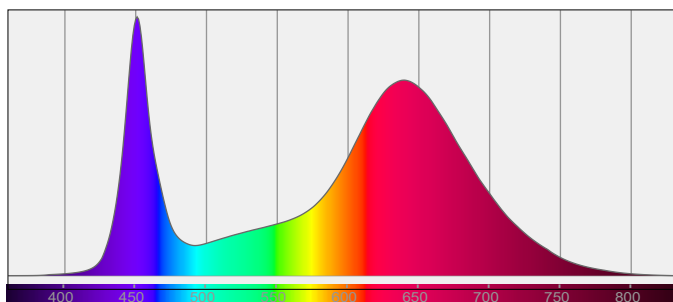

Light Measurement Report

Print date: 3-11-2025

Measurement date and time: 3-11-2025 09:35:08 – Measurement no. VFR-251103-3863-MS


Measurement tracking No. and Link: [VT251103-005537](https://www.viso-systems.com/VT251103-005537)

Operator:



Luminous Intensity diagram

Unit: 0-100% of peak intensity

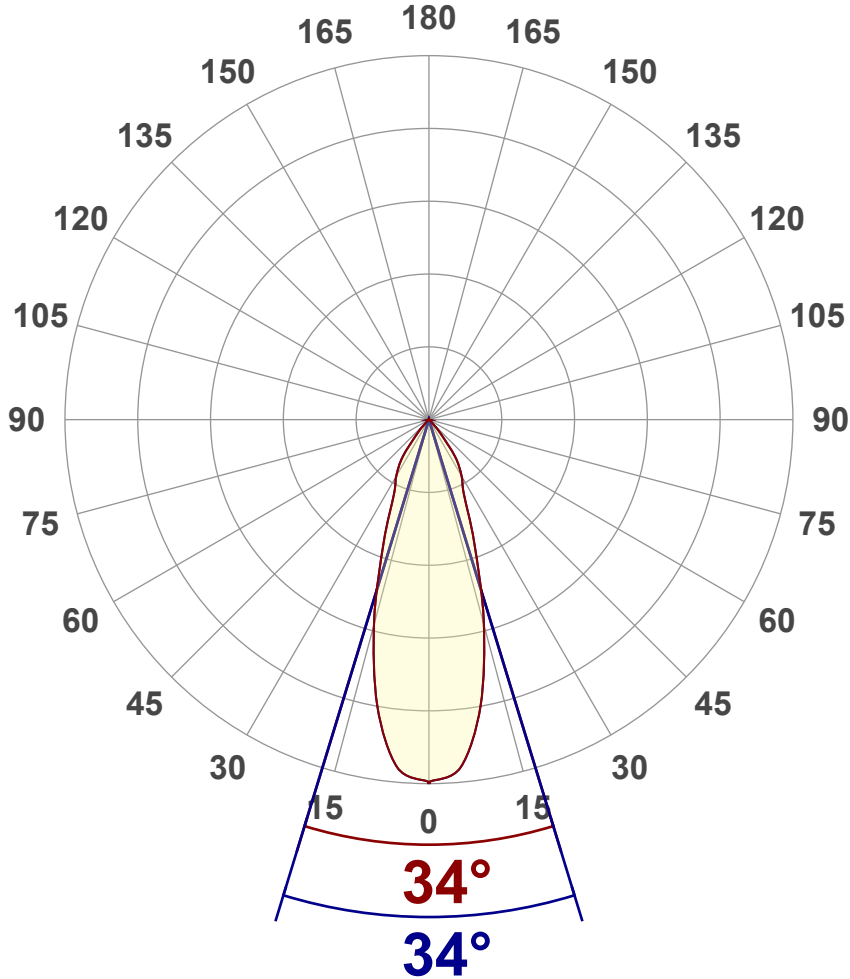

Main Values

Output (total Lumen)	1384 lm
Lumen Up% / Down%	0,13% / 99,87%
Peak Intensity	3043 cd
Beam Angle (50%)	34°
Beam Angle (90%)	34°
Beam Angle (10%)	34°

Cut-off Angle

Average 2,5%	86,6°
--------------	-------

Field Angle

Average 10%	73,8°
-------------	-------


Intensity Ratio

In 120° cone	99,6%
In 90° cone	98,0%

C000-C180

C090-C270

Linear distribution diagram - Intensity (candela) vs γ -angle

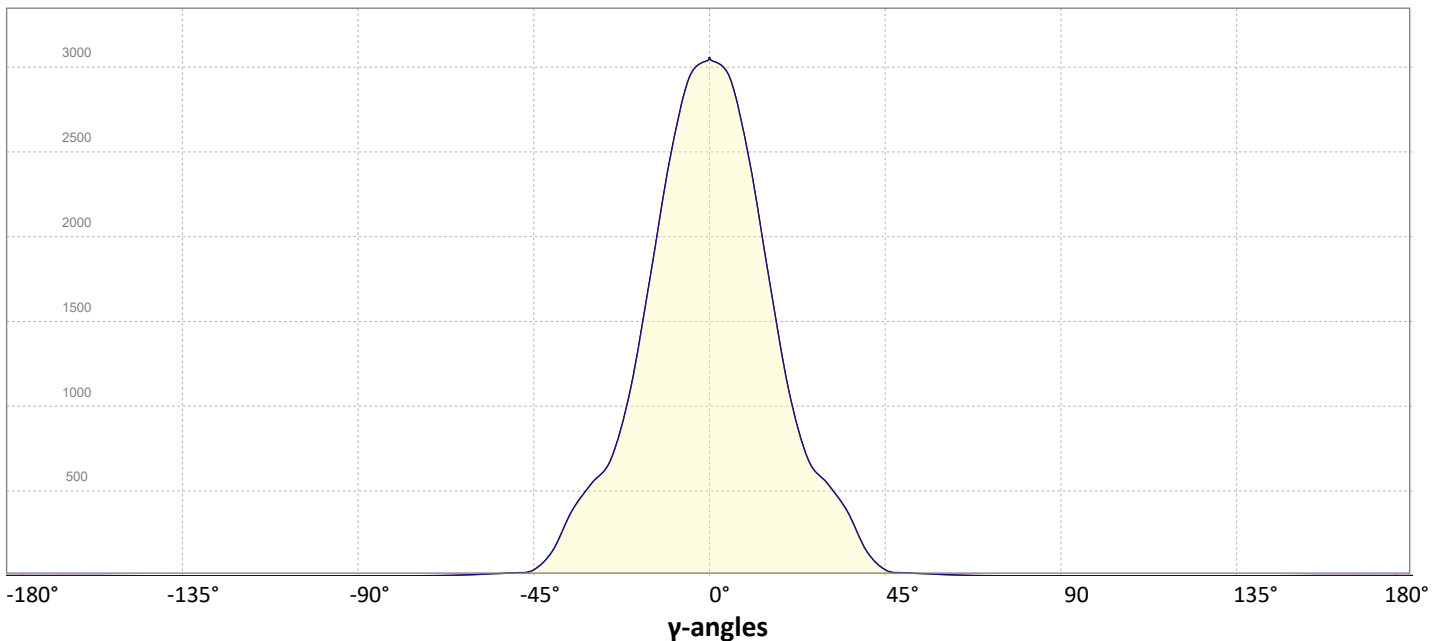

Light Measurement Report

Print date: 3-11-2025


Measurement date and time: 3-11-2025 09:35:08 – Measurement no. VFR-251103-3863-MS

Measurement tracking No. and Link: [VT251103-005537](#)

Operator:



Iso-intensity Diagram (Iso-candela)

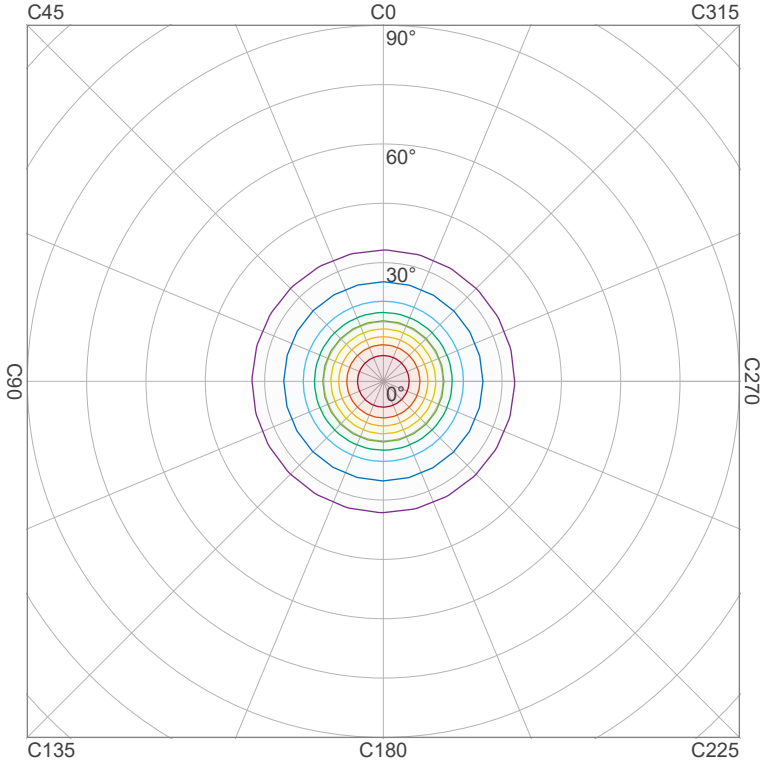


90 %	2738,8 cd
80 %	2434,5 cd
70 %	2130,1 cd
60 %	1825,8 cd
50 %	1521,5 cd
40 %	1217,2 cd
30 %	912,9 cd
20 %	608,6 cd
10 %	304,3 cd

Peak intensity: 3043,1 cd

Number of c-planes: 12

Iso-illuminance Diagram (Iso-lux)

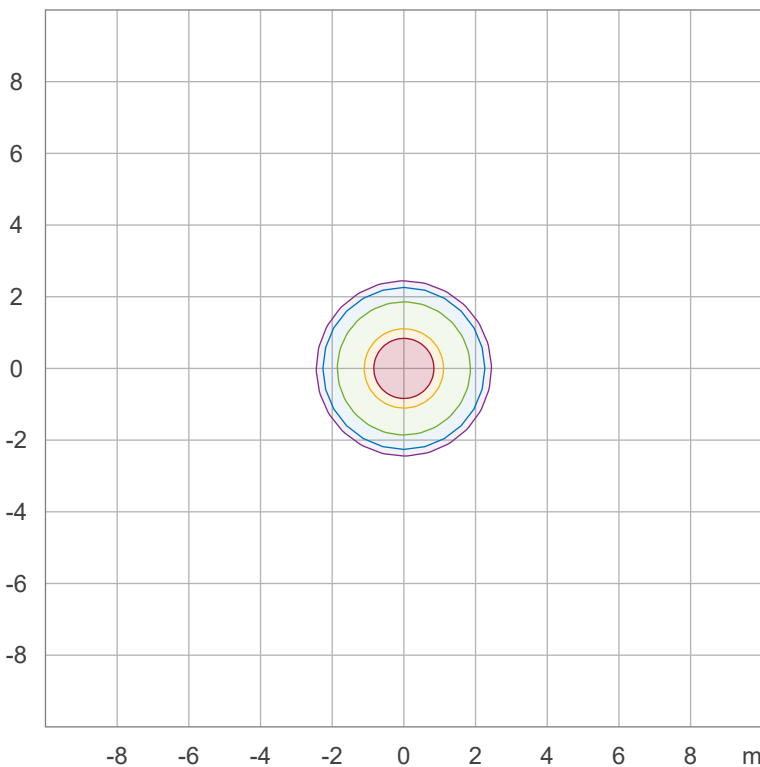

50,0 %	169,1 lx
30,0 %	101,4 lx
10,0 %	33,8 lx
5,0 %	16,9 lx
3,0 %	10,1 lx

Peak illuminance: 338,1 lx

Mounting height: 3,0 m

Number of c-planes: 12

Light Measurement Report

Print date: 3-11-2025


Measurement date and time: 3-11-2025 09:35:08 – Measurement no. VFR-251103-3863-MS

Measurement tracking No. and Link: [VT251103-005537](https://www.viso-systems.com/VT251103-005537)

Operator:



Beam Details

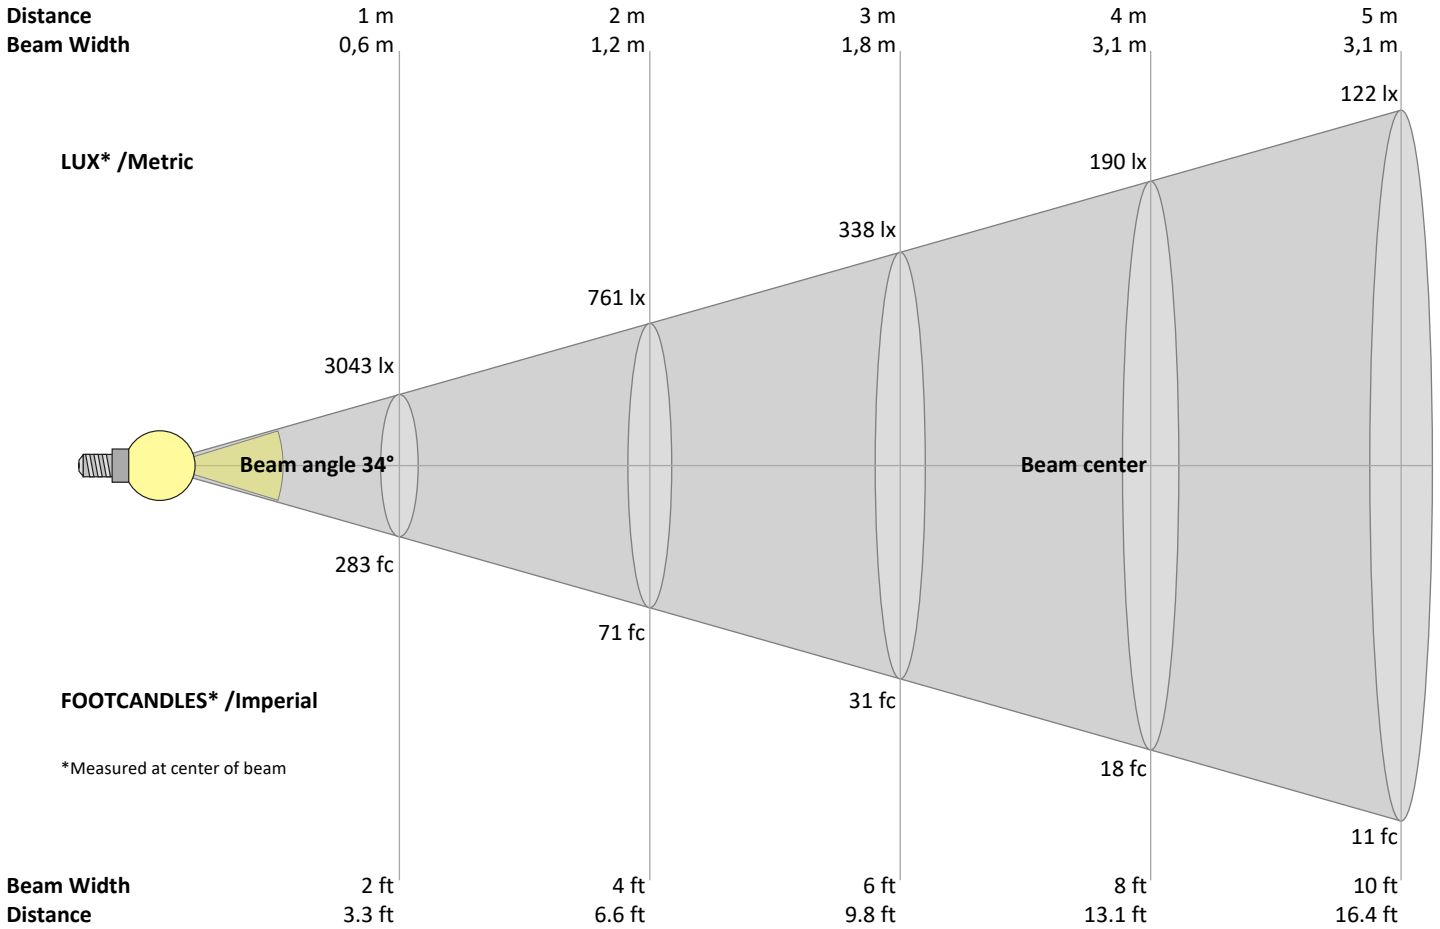

Beam intensities from 1 – 20 m

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	m
3,3	6,6	9,8	13,1	16,4	19,7	23	26,2	29,5	32,8	36,1	39,4	42,7	45,9	49,2	52,5	55,8	59,1	62,3	65,6	ft
3043	761	338	190	122	85	62	48	38	30	25	21	18	16	14	12	11	9	8	8	lux
282,7	70,7	31,4	17,7	11,3	7,9	5,8	4,4	3,5	2,8	2,3	2	1,7	1,4	1,3	1,1	1	0,9	0,8	0,7	fc

Intensities in 0° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°	γ
3043	3005	2962	2860	2664	2469	2201	1925	1654	1392	1131	954	789	665	608	550	487	422	346	251	cd
100%	99%	97%	94%	88%	81%	72%	63%	54%	46%	37%	31%	26%	22%	20%	18%	16%	14%	11%	8%	of 0°val

Intensities in 90° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°	γ
3043	3005	2962	2860	2664	2469	2201	1925	1654	1392	1131	954	789	665	608	550	487	422	346	251	cd
100%	99%	97%	94%	88%	81%	72%	63%	54%	46%	37%	31%	26%	22%	20%	18%	16%	14%	11%	8%	of 0°val

Intensities in 180° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°	γ
3043	3005	2962	2860	2664	2469	2201	1925	1654	1392	1131	954	789	665	608	550	487	422	346	251	cd
100%	99%	97%	94%	88%	81%	72%	63%	54%	46%	37%	31%	26%	22%	20%	18%	16%	14%	11%	8%	of 0°val

Intensities in 270° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°	γ
3043	3005	2962	2860	2664	2469	2201	1925	1654	1392	1131	954	789	665	608	550	487	422	346	251	cd
100%	99%	97%	94%	88%	81%	72%	63%	54%	46%	37%	31%	26%	22%	20%	18%	16%	14%	11%	8%	of 0°val

Light Measurement Report

Print date: 3-11-2025

Measurement date and time: 3-11-2025 09:35:08 – Measurement no. VFR-251103-3863-MS

Measurement tracking No. and Link: [VT251103-005537](#)

Operator:



Light Planning – UGR table

Uncorrected, comprehensive UGR table according to 117-1995

Reflectances		70	70	50	50	30	70	70	50	50	30
	ρ Ceiling	70	70	50	50	30	70	70	50	50	30
	ρ Walls	50	30	50	30	30	50	30	50	30	30
	ρ Floor	20	20	20	20	20	20	20	20	20	20
Room size		Viewed Crosswise					Viewed Endwise				
H = mounting height above eye level		(Viewing direction orthogonal to lamp length axis)					(Viewing direction parallel to lamp length axis)				
X	Y										
2H	2H	18,8	19,4	18,9	19,6	19,8	18,8	19,4	18,9	19,6	19,8
	3H	18,5	19,2	18,9	19,4	19,6	18,5	19,2	18,9	19,4	19,6
	4H	18,5	19,1	18,9	19,4	19,6	18,5	19,1	18,9	19,4	19,6
	6H	18,5	19,0	18,8	19,3	19,7	18,5	19,0	18,8	19,3	19,7
	8H	18,4	18,9	18,7	19,3	19,7	18,4	18,9	18,7	19,3	19,7
	12H	18,4	18,9	18,7	19,2	19,7	18,4	18,9	18,7	19,2	19,7
4H	2H	18,5	19,1	18,9	19,4	19,6	18,5	19,1	18,9	19,4	19,6
	3H	18,4	18,9	18,7	19,2	19,7	18,4	18,9	18,7	19,2	19,7
	4H	18,2	18,7	18,6	19,1	19,6	18,2	18,7	18,6	19,1	19,6
	6H	18,1	18,7	18,6	19,0	19,3	18,1	18,7	18,6	19,0	19,3
	8H	18,1	18,6	18,6	18,9	19,3	18,1	18,6	18,6	18,9	19,3
	12H	18,0	18,4	18,5	18,8	19,3	18,0	18,4	18,5	18,8	19,3
8H	4H	18,1	18,6	18,6	18,9	19,3	18,1	18,6	18,6	18,9	19,3
	6H	18,0	18,3	18,5	18,8	19,3	18,0	18,3	18,5	18,8	19,3
	8H	18,0	18,3	18,5	18,8	19,4	18,0	18,3	18,5	18,8	19,4
	12H	17,9	18,2	18,5	18,7	19,3	17,9	18,2	18,5	18,7	19,3
12H	4H	18,0	18,4	18,5	18,8	19,3	18,0	18,4	18,5	18,8	19,3
	6H	18,0	18,3	18,5	18,8	19,4	18,0	18,3	18,5	18,8	19,4
	8H	17,9	18,2	18,5	18,7	19,3	17,9	18,2	18,5	18,7	19,3

Variations with the observer position for the luminaire spacings, S:

S = 1.0H	5,1 / -12,0	5,1 / -12,0
S = 1.5H	7,8 / -15,5	7,8 / -15,5
S = 2.0H	9,8 / -19,5	9,8 / -19,5

Coefficients of Utilization

Ceiling reflectance	80			70			50			30			10			0		
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio)																	
	Room Values are expressed as percentage of Lumen delivered to the task surface																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	112	109	107	112	109	107	106	105	104	102	102	100	99	98	97	96	95
2	109	105	101	98	107	103	100	97	100	97	95	97	95	93	94	92	91	89
3	104	99	94	91	102	97	93	90	95	91	88	92	89	87	90	88	86	84
4	100	93	88	84	98	92	87	84	90	86	83	88	85	82	86	83	81	80
5	96	88	83	79	94	87	82	79	86	81	78	84	80	77	82	79	77	75
6	92	84	78	75	90	83	78	74	81	77	74	80	76	73	79	75	73	71
7	88	80	74	70	87	79	74	70	78	73	70	77	73	70	75	72	69	68
8	84	76	71	67	83	75	70	67	74	70	66	73	69	66	72	69	66	65
9	81	72	67	64	80	72	67	64	71	66	63	70	66	63	69	66	63	62
10	78	69	64	61	77	69	64	61	68	64	60	67	63	60	67	63	60	59

Light Measurement Report

Print date: 3-11-2025

Measurement date and time: 3-11-2025 09:35:08 – Measurement no. VFR-251103-3863-MS

Measurement tracking No. and Link: [VT251103-005537](https://www.viso-systems.com/VT251103-005537)


Operator:



Luminaire budgetary diagram

Uncorrected, comprehensive UGR table according to 117-1995

LAMPS (number of lamps)

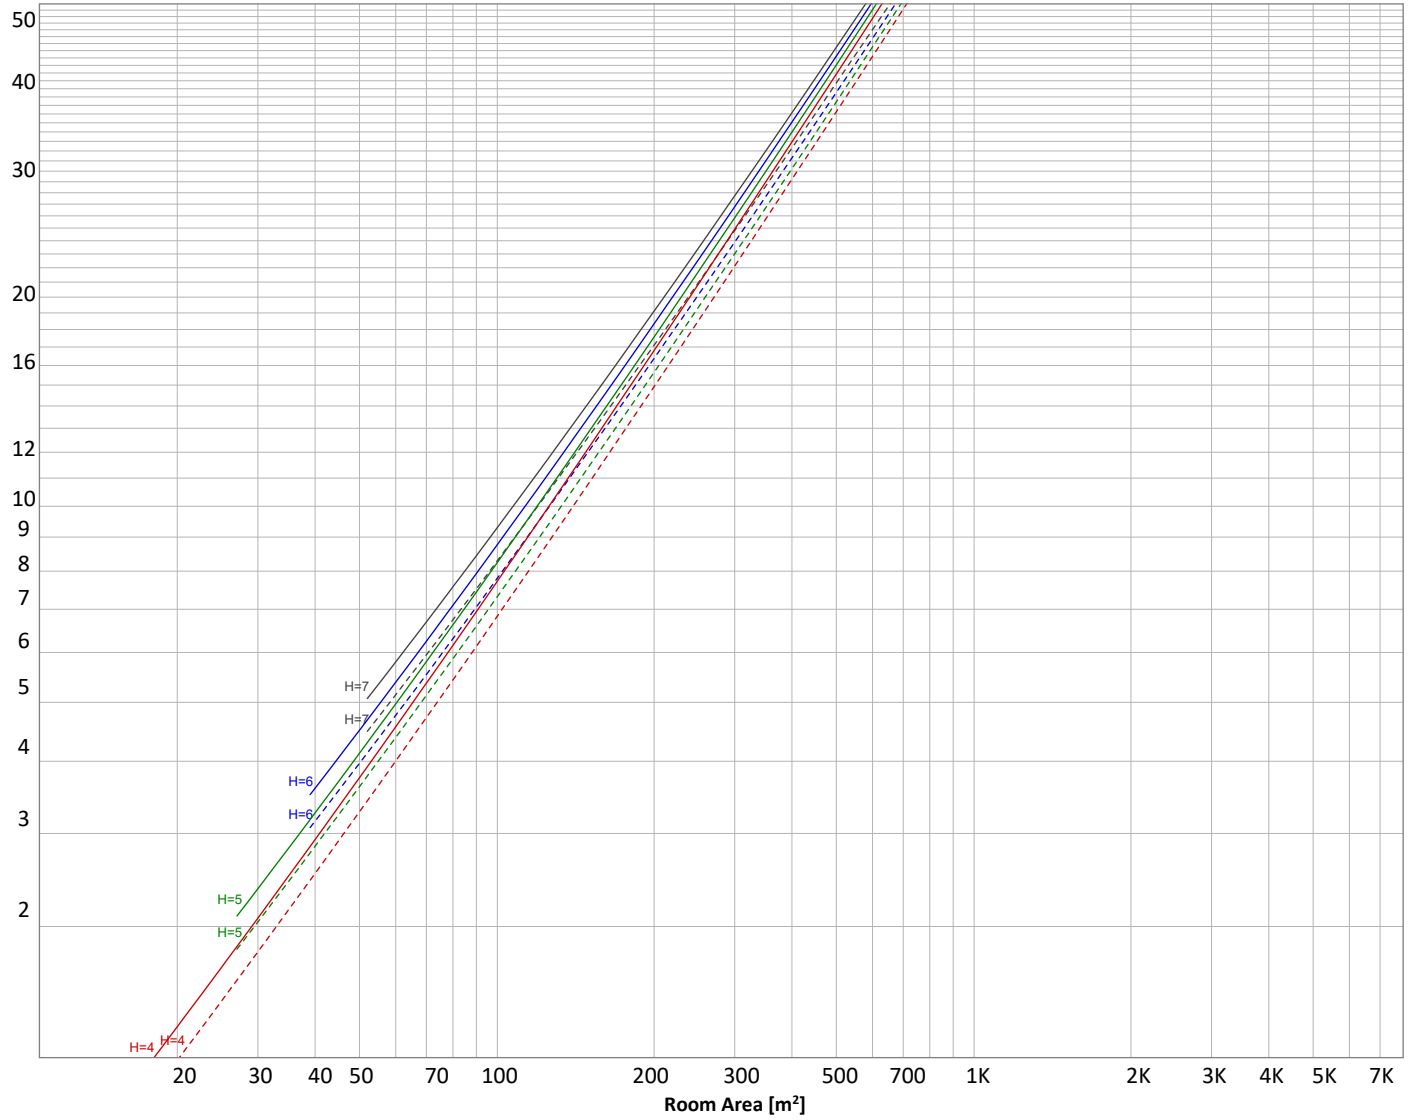

Conditions

H = Room height	Flux = 1384 lm	$\rho(\%)$			
H _{down} = Lamp distance from ceiling =	0.00 m	Line type	Ceiling reflectance	Wall reflectance	Floor reflectance
H _{work} = Work area height from floor =	0.00 m	-----	70	50	30
E _{work} = Average lux on work area =	100 lx	_____	50	30	20

Zonal Lumen Summary

0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
262 lm	486 lm	346 lm	228 lm	44,6 lm	11,0 lm	3,48 lm	0,712 lm	0,034 lm
90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
0,001 lm	0,002 lm	0,006 lm	0,066 lm	0,144 lm	0,391 lm	0,638 lm	0,450 lm	0,149 lm

Light Measurement Report

Print date: 3-11-2025

Measurement date and time: 3-11-2025 09:35:08 – Measurement no. VFR-251103-3863-MS

Measurement tracking No. and Link: [VT251103-005537](#)

Operator:



Outdoor Light Planning

Lumen per Zone

Zone (γ)	Lumen	% Total
0-10°	{LUM00-10} lm	#VALUE!
10-20°	{LUM10-20} lm	#VALUE!
20-30°	{LUM20-30} lm	#VALUE!
30-40°	{LUM30-40} lm	#VALUE!
40-50°	{LUM40-50} lm	#VALUE!
50-60°	{LUM50-60} lm	#VALUE!
60-70°	{LUM60-70} lm	#VALUE!
70-80°	{LUM70-80} lm	#VALUE!
80-90°	{LUM80-90} lm	#VALUE!
90-100°	{LUM90-100} lm	#VALUE!
100-110°	{LUM100-110} lm	#VALUE!
110-120°	{LUM110-120} lm	#VALUE!
120-130°	{LUM120-130} lm	#VALUE!
130-140°	{LUM130-140} lm	#VALUE!
140-150°	{LUM140-150} lm	#VALUE!
150-160°	{LUM150-160} lm	#VALUE!
160-170°	{LUM160-170} lm	#VALUE!
170-180°	{LUM170-180} lm	#VALUE!
Total	0 lm	#VALUE!

Intensity peaks

Max intensity	{PEAK} cd
Intensity, 90°	{INT90} cd
Intensity, 0°	{INT0} cd

Zonal Lumen summary


Zone (γ)	Lumen	% Total
0-30°	{LUM00-30} lm	#VALUE!
0-40°	{LUM00-40} lm	#VALUE!
0-60°	{LUM00-60} lm	#VALUE!
60-90°	{LUM60-90} lm	#VALUE!
70-100°	{LUM70-100} lm	#VALUE!
90-120°	{LUM90-120} lm	#VALUE!
0-90°	{LUM00-90} lm	#VALUE!
90-180°	{LUM90-180} lm	#VALUE!
0-180°	{LUM00-180} lm	#VALUE!

BUG rating

	Lumen	% Total
Forward light		
Low(0-30°)	{BUG0} lm	#VALUE!
Medium(30-60°)	{BUG1} lm	#VALUE!
High(60-80°)	{BUG2} lm	#VALUE!
Very high(80-90°)	{BUG3} lm	#VALUE!
Back light		
Low(0-30°)	{BUG4} lm	#VALUE!
Medium(30-60°)	{BUG5} lm	#VALUE!
High(60-80°)	{BUG6} lm	#VALUE!
Very high(80-90°)	{BUG7} lm	#VALUE!
Uplight		
Low(90-100°)	{BUG8} lm	#VALUE!
High(100-180°)	{BUG9} lm	#VALUE!

IESNA TM-15-07 Luminaire Classification System For Outdoor Luminaires

BUG rating B2 U1 G0

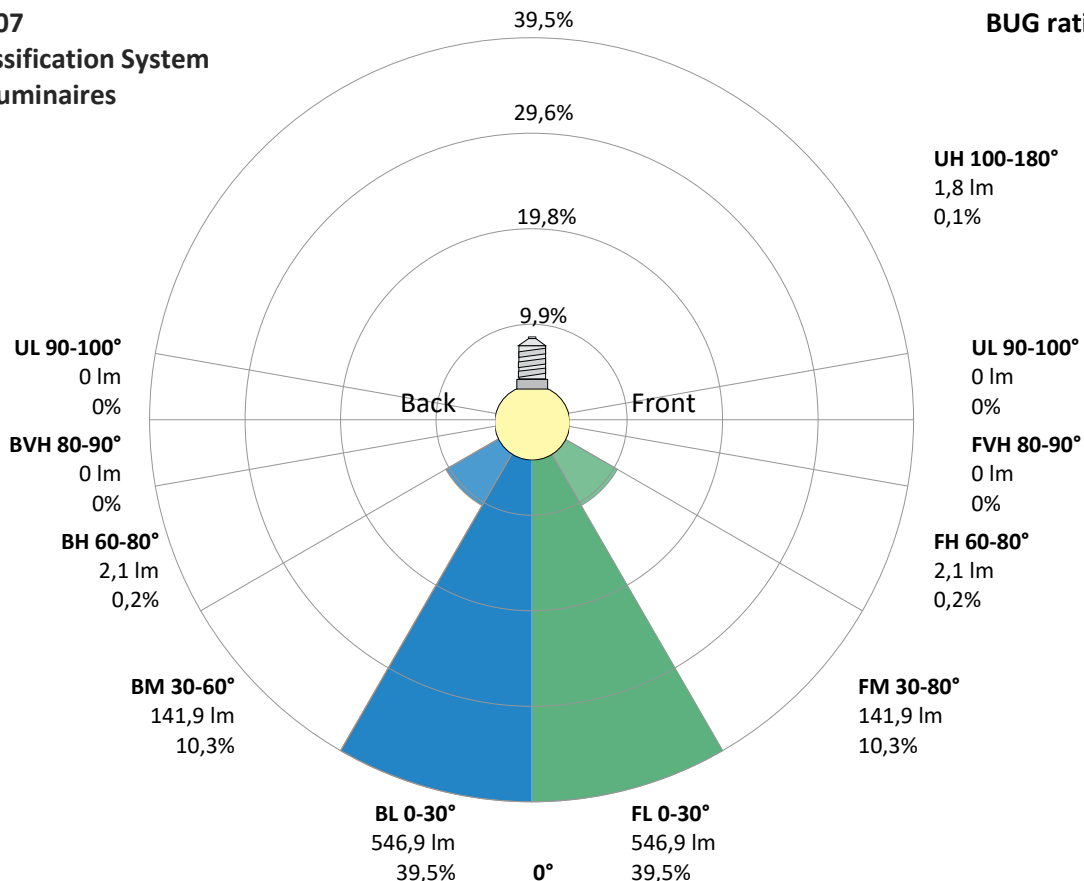

Light Measurement Report

Print date: 3-11-2025

Measurement date and time: 3-11-2025 09:35:08 – Measurement no. VFR-251103-3863-MS

Measurement tracking No. and Link: [VT251103-005537](#)

Operator:




Power Details

Input Power

Power feed to light source	30,6 W
Frequency of input power	50 Hz
RMS Input voltage feed, V_{RMS}	230 V
RMS Input current feed, I_{RMS}	0,159 A
Volt-Ampere or apparent power = $V_{RMS} * I_{RMS}$	36,5 VA
Displacement factor of AC power feed	0,99
Power factor of AC current feed	0,84
Total harmonic distortion of the current	61,9%
Total harmonic distortion of the voltage	0,13%

Input Power Curve

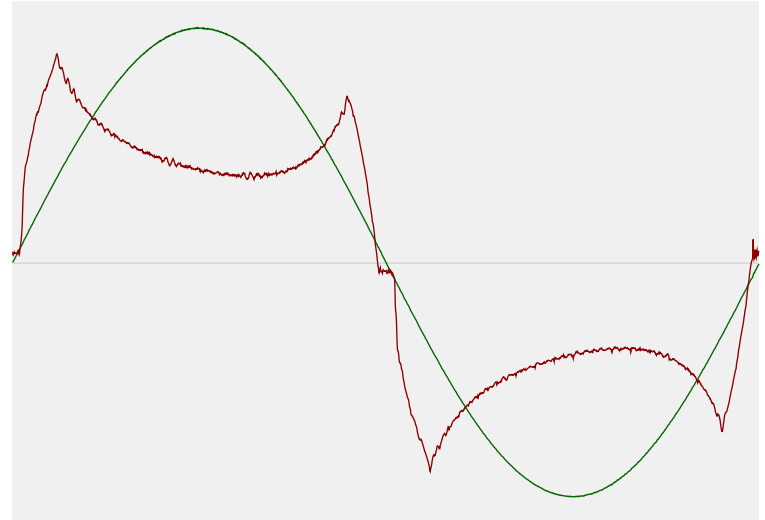

Efficiency

Radiated power efficiency	25,1%
Lumen efficiency	45 lm/W

Stabilization Details

Warmup Conditions

Stable period	15 min
Stable change max	2,0%
Minimum time	15 min

Color Temperature Change

CCT start	0 K
CCT shift	0 K
CCT end	0 K


Warmup Result

Total warmup time	Lamp stabilized in 15 min 1 sec
Warmup variation	-1,3%

Output Change

Output start	1402 lm
Output change	-18 lm
Output end	1384 lm

Stabilization Curve

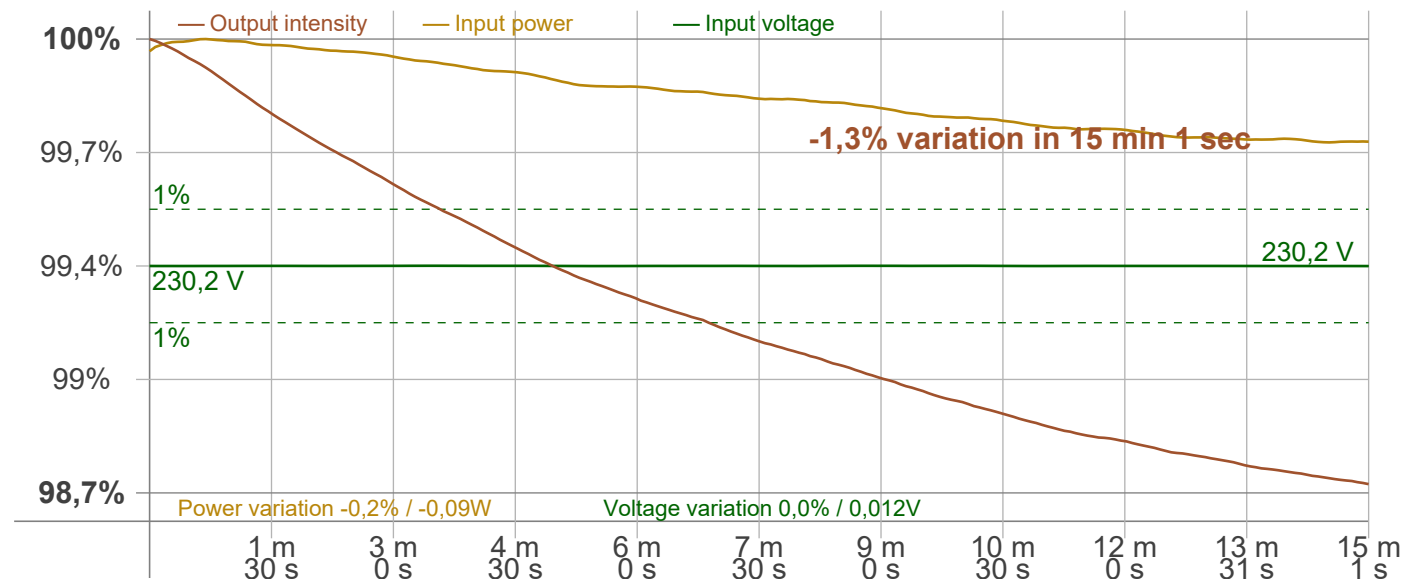

Light Measurement Report

Print date: 3-11-2025

Measurement date and time: 3-11-2025 09:35:08 – Measurement no. VFR-251103-3863-MS

Measurement tracking No. and Link: [VT251103-005537](#)

Operator:



Flicker /TLA details

Flicker Meter Type: Viso Systems LabFlicker
 Frequency of input power: 50 Hz
 Flicker/TLA sample rate: 20000 samples/s

Measurement time
 PstLM: 180 sec
 All other indices: 1,2 sec

Flicker indices according to Illuminating Engineering Society (IES)

Flicker frequency: 99,5 Hz
 Percent Flicker: 0,92 %
 Flicker index: 0

Flicker indices according to California Energy Commission (CEC) 2016b

JA8/10 40 Hz: 0,03 %
 JA8/10 90 Hz: 0,03 %
 JA8/10 200 Hz: 0,79 %
 JA8/10 400 Hz: 0,88 %
 JA8/10 1000 Hz: 0,91 %


TLA indices (re IEC TR 61547-1, IEC 61000-3-3 and IEC 61000-4-15)

PstLM value (F < 80 Hz): 0,03
 SVM value (80 < F < 2000 Hz): 0,03

Flicker indices according to Lighting Research Center (2015)

Perception metric, Assist Mp: 0,02

Flicker frame (frame of one flicker period in time domain)

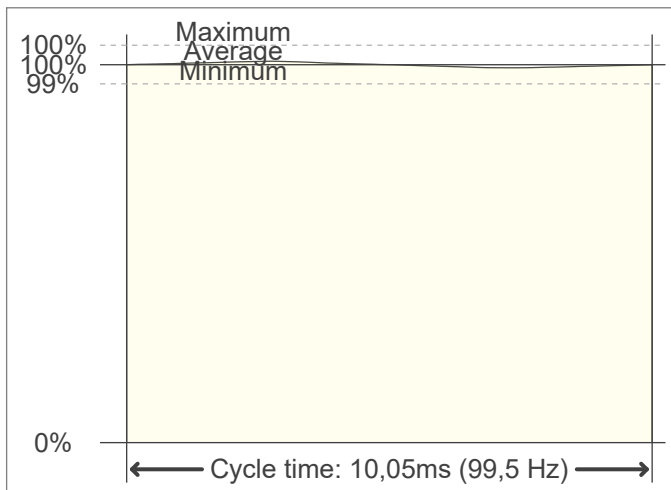

Flicker FFT (flicker curve in frequency domain)



IEEE 1789 Frequency/modulation plot

