


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:231.1V I:0.6529A P:148.0W PF:0.9808 Lamp Flux:22627.4x1 lm		
NAME: 270817	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.:	SUR.:0.15*0.15	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 152.89 lm/W			
MODEL	270817	I _{max} (cd)	10971	S/MH(C0/180)	1.26
NOMINAL POWER(W)	148	LOR(%)	100.0	S/MH(C90/270)	1.19
RATED VOLTAGE(V)	232	TOTAL FLUX(lm)	22627	η UP,DN(C0-180)	0.0,48.9
NOMINAL FLUX(lm)	22627.4	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,51.1
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	231.1	η down(%)	100.0	CIBSE SHR MAX	1.30

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

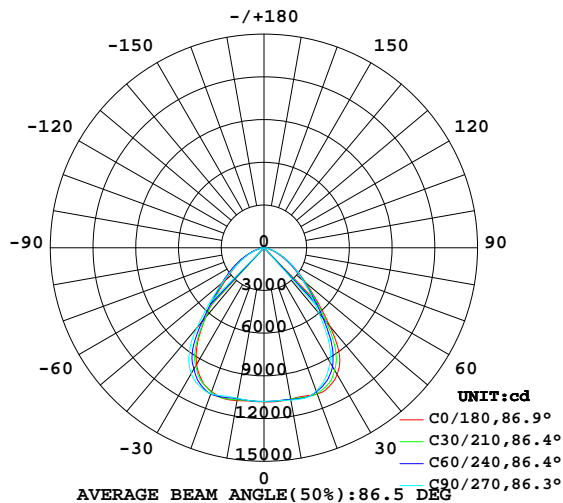

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

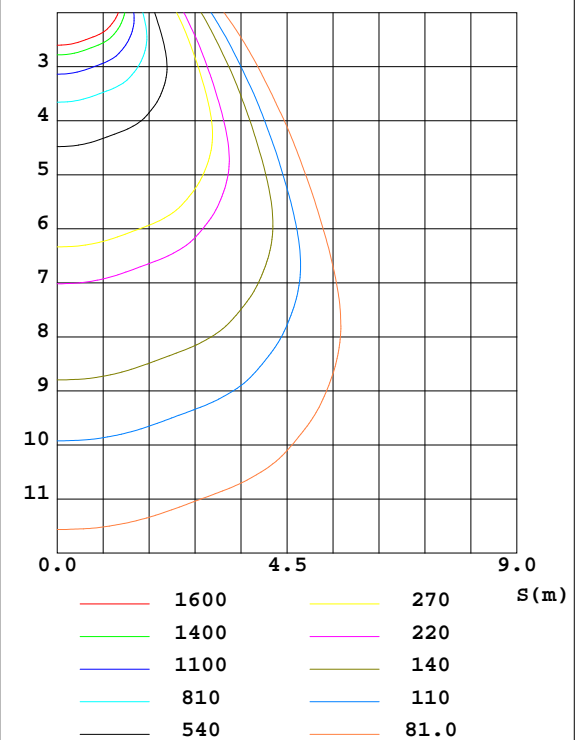

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2022-09-19

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.267
 Humidity:65.0%
 Test Distance:7.180m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1079	1080	1086	1086	1090	1081	1074	1072	0- 10	1030	1030	4.55,4.55
20	1092	1083	1071	1060	1075	1087	1091	1080	10- 20	3071	4101	18.1,18.1
30	1027	978.2	928.2	919.0	947.4	972.2	1022	1043	20- 30	4804	8904	39.4,39.4
40	719.9	663.9	599.8	608.5	639.4	656.2	734.0	768.8	30- 40	5287	14192	62.7,62.7
50	381.5	363.8	358.4	357.2	353.2	380.5	380.7	394.1	40- 50	3909	18101	80,80
60	207.5	191.3	201.7	194.6	196.8	213.1	196.9	204.5	50- 60	2490	20591	91,91
70	87.17	79.49	82.33	81.87	88.48	97.02	88.59	87.96	60- 70	1386	21977	97.1,97.1
80	23.88	23.05	23.66	23.85	25.83	27.69	26.27	25.12	70- 80	531.4	22508	99.5,99.5
90	1.965	1.865	1.986	1.928	2.942	3.255	2.993	2.932	80- 90	119.2	22627	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:×10cd									UNIT:lm		


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2022-09-19

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.267
 Humidity:65.0%
 Test Distance:7.180m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:231.1V I:0.6529A P:148.0W PF:0.9808 Lamp Flux:22627.4x1 lm		
NAME: 270817	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.:	SUR.:0.15*0.15	PROTECTION ANGLE:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.07	1.04	1.01	1.05	1.02	.99	1.01	.98	.96	.97	.95	.93	.94	.92	.90	.88
2.0	.96	.91	.86	.94	.89	.85	.91	.87	.83	.88	.84	.81	.85	.82	.79	.77
3.0	.86	.80	.74	.85	.79	.74	.82	.77	.72	.79	.75	.71	.77	.73	.70	.68
4.0	.78	.71	.65	.77	.70	.64	.74	.68	.64	.72	.67	.63	.70	.66	.62	.60
5.0	.71	.63	.57	.70	.62	.57	.68	.61	.56	.66	.60	.56	.64	.59	.55	.53
6.0	.65	.57	.51	.64	.56	.51	.62	.55	.50	.60	.55	.50	.59	.54	.50	.48
7.0	.59	.51	.46	.58	.51	.46	.57	.50	.45	.56	.50	.45	.54	.49	.45	.43
8.0	.54	.47	.41	.54	.46	.41	.53	.46	.41	.51	.45	.41	.50	.45	.41	.39
9.0	.50	.43	.38	.50	.43	.38	.49	.42	.37	.48	.42	.37	.47	.41	.37	.35
10.0	.47	.39	.35	.46	.39	.34	.45	.39	.34	.44	.38	.34	.43	.38	.34	.32

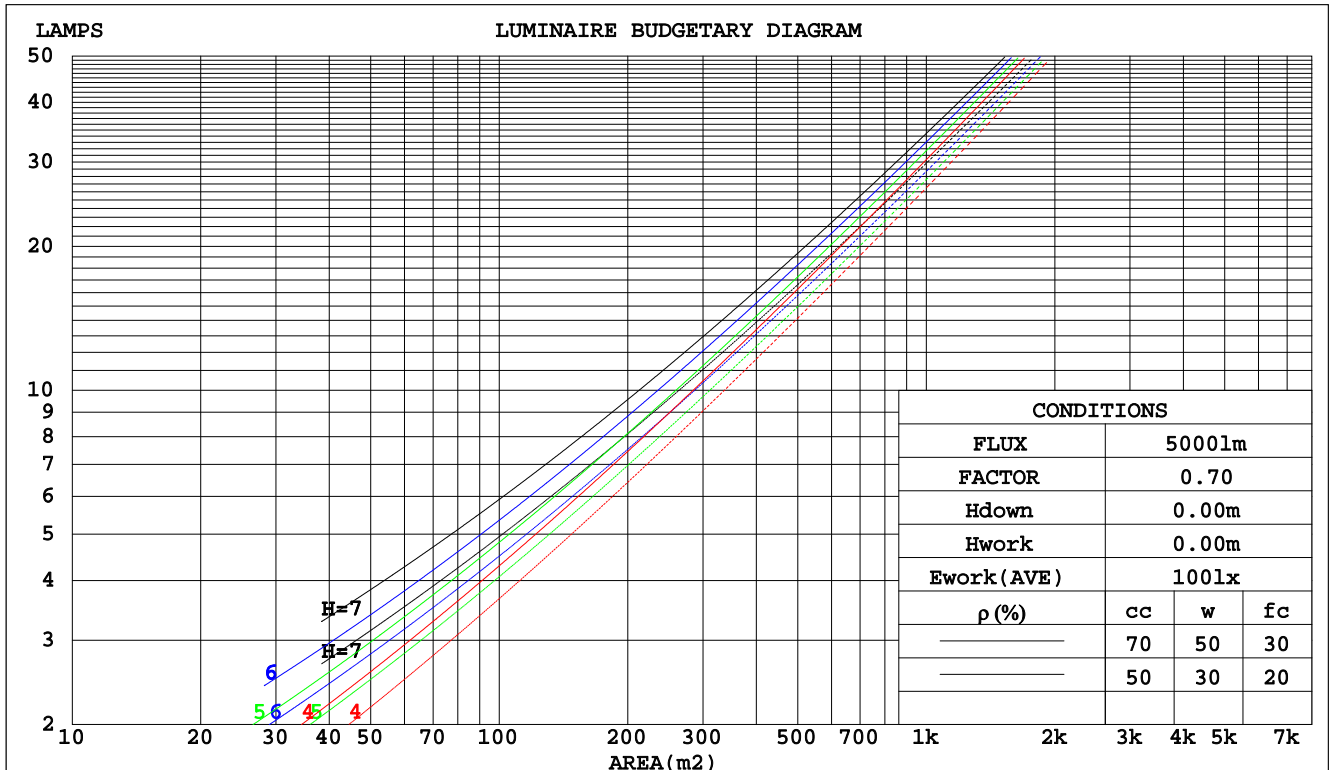

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2022-09-19

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.267
 Humidity: 65.0%
 Test Distance: 7.180m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:231.1V I:0.6529A P:148.0W PF:0.9808 Lamp Flux:22627.4x1 lm								
NAME: 270817				TYPE:			WEIGHT:	
DIM.:				SPEC.:			SERIAL No.:	
MFR.:				SUR.:0.15*0.15			PROTECTION ANGLE:	

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.245	.139	.044	.238	.136	.043	.225	.129	.041	.213	.123	.039	.202	.117	.038		
2.0	.237	.130	.040	.231	.127	.039	.220	.122	.038	.210	.118	.037	.200	.113	.036		
3.0	.225	.120	.036	.219	.118	.035	.210	.114	.035	.201	.110	.034	.192	.106	.033		
4.0	.212	.110	.032	.207	.108	.032	.198	.105	.031	.190	.102	.031	.183	.099	.030		
5.0	.199	.101	.029	.195	.100	.029	.187	.098	.029	.180	.095	.028	.174	.093	.028		
6.0	.187	.094	.027	.184	.093	.027	.177	.091	.026	.171	.089	.026	.165	.087	.026		
7.0	.177	.087	.025	.174	.086	.025	.167	.085	.024	.162	.083	.024	.156	.081	.024		
8.0	.167	.082	.023	.164	.081	.023	.159	.079	.023	.153	.078	.022	.149	.076	.022		
9.0	.158	.076	.021	.155	.076	.021	.150	.074	.021	.146	.073	.021	.141	.072	.021		
10.0	.150	.072	.020	.147	.071	.020	.143	.070	.020	.139	.069	.020	.135	.068	.019		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.176	.157	.139	.150	.134	.120	.103	.093	.083	.059	.054	.048	.019	.017	.016	
2.0	.165	.132	.105	.141	.114	.090	.097	.079	.063	.056	.046	.037	.018	.015	.012	
3.0	.156	.114	.081	.134	.098	.070	.092	.068	.049	.053	.040	.029	.017	.013	.009	
4.0	.148	.100	.064	.127	.087	.056	.087	.060	.039	.050	.035	.023	.016	.012	.008	
5.0	.140	.089	.052	.120	.077	.045	.083	.054	.032	.048	.032	.019	.015	.010	.006	
6.0	.133	.081	.043	.115	.070	.037	.079	.049	.026	.046	.029	.016	.015	.009	.005	
7.0	.127	.074	.036	.109	.064	.032	.076	.045	.022	.044	.026	.013	.014	.009	.004	
8.0	.121	.068	.031	.104	.059	.027	.072	.041	.019	.042	.024	.011	.014	.008	.004	
9.0	.116	.063	.027	.100	.055	.024	.069	.038	.017	.040	.023	.010	.013	.007	.003	
10.0	.111	.059	.024	.095	.051	.021	.066	.036	.015	.039	.021	.009	.013	.007	.003	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-09-19

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.267
Humidity:65.0%
Test Distance:7.180m [K=1.0000]
Remarks:

Uncorrected UGR Table

Test:U:231.1V I:0.6529A P:148.0W PF:0.9808 Lamp Flux:22627.4x1 lm											
NAME: 270817					TYPE:			WEIGHT:			
DIM.:					SPEC.:			SERIAL No.:			
MFR.:					SUR.:0.15*0.15			PROTECTION ANGLE:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H		31.3	32.6	31.5	32.8	33.0	30.9	32.2	31.2	32.4	32.6
	3H	31.8	33.0	32.0	33.2	33.4	31.4	32.6	31.7	32.8	33.1
	4H	31.9	33.0	32.2	33.2	33.5	31.5	32.6	31.8	32.9	33.1
	6H	31.9	32.9	32.2	33.2	33.5	31.5	32.6	31.9	32.9	33.1
	8H	31.9	32.9	32.2	33.2	33.4	31.5	32.6	31.9	32.8	33.1
	12H	31.8	32.8	32.2	33.1	33.4	31.5	32.5	31.9	32.8	33.1
4H	2H	31.4	32.6	31.7	32.8	33.0	31.1	32.3	31.4	32.5	32.7
	3H	32.0	33.0	32.4	33.3	33.6	31.7	32.7	32.1	33.0	33.3
	4H	32.2	33.1	32.5	33.4	33.7	31.9	32.8	32.2	33.1	33.4
	6H	32.3	33.1	32.7	33.4	33.8	32.0	32.8	32.4	33.1	33.5
	8H	32.3	33.0	32.7	33.4	33.7	32.0	32.7	32.4	33.1	33.5
	12H	32.3	32.9	32.7	33.3	33.7	32.0	32.7	32.4	33.0	33.4
8H	4H	32.2	32.9	32.6	33.3	33.6	31.9	32.6	32.3	33.0	33.4
	6H	32.3	32.9	32.7	33.3	33.7	32.0	32.6	32.5	33.0	33.5
	8H	32.4	32.9	32.8	33.3	33.7	32.1	32.6	32.5	33.0	33.5
	12H	32.4	32.8	32.8	33.3	33.7	32.1	32.5	32.6	33.0	33.5
12H	4H	32.1	32.8	32.6	33.2	33.6	31.9	32.5	32.3	32.9	33.3
	6H	32.3	32.8	32.7	33.2	33.7	32.0	32.5	32.5	33.0	33.4
	8H	32.3	32.8	32.8	33.2	33.7	32.1	32.5	32.6	33.0	33.4
Variations with the observer position at spacings:											
S = 1.0H	+ 0.7 / - 1.0					+ 0.7 / - 0.9					
1.5H	+ 0.9 / - 0.6					+ 0.6 / - 0.4					
2.0H	+ 1.4 / - 1.2					+ 1.3 / - 1.3					

CIE Pub.117 Corrected 22627 lm Total Lamp Luminous Flux.(8log(F/F0) = 10.8)

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-09-19

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.267
Humidity:65.0%
Test Distance:7.180m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:231.1V I:0.6529A P:148.0W PF:0.9808 Lamp Flux:22627.4x1 lm		
NAME: 270817	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.:	SUR.:0.15*0.15	PROTECTION ANGLE:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	68	58	52	67	58	52	66	58	52	47
0.80	78	68	62	77	68	62	75	67	62	56
1.00	85	77	71	84	76	70	82	77	70	64
1.25	92	83	78	90	83	77	88	81	77	71
1.50	96	88	83	94	87	82	92	86	81	75
2.00	101	95	90	100	94	89	96	91	87	81
2.50	104	98	94	102	97	93	99	94	91	84
3.00	107	101	97	105	100	96	101	97	94	86
4.00	110	105	102	107	104	100	104	100	98	90
5.00	112	108	105	109	106	103	105	102	100	92
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-09-19

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.267
Humidity:65.0%
Test Distance:7.180m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:231.1V I:0.6529A P:148.0W PF:0.9808 Lamp Flux:22627.4x1 lm		
NAME: 270817	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.:	SUR.:0.15*0.15	PROTECTION ANGLE:

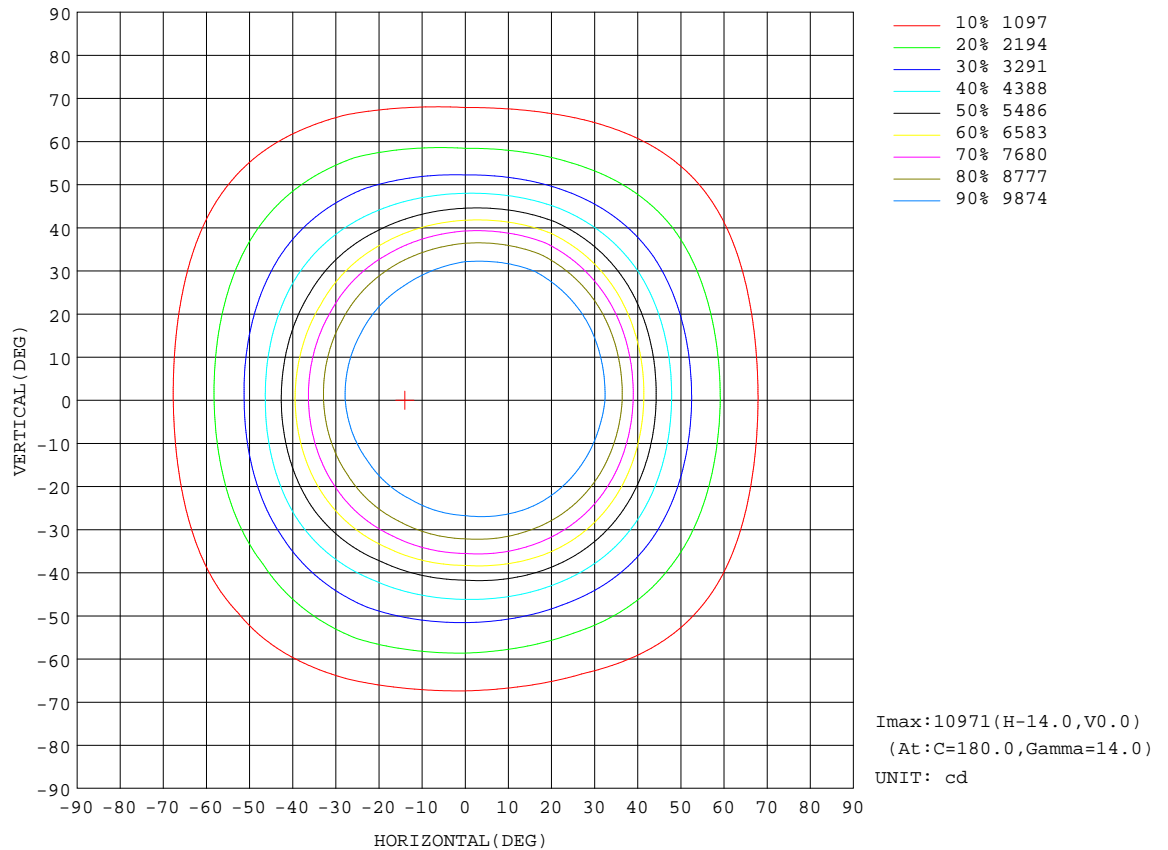


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-09-19

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.267
Humidity:65.0%
Test Distance:7.180m [K=1.0000]
Remarks:

AAI Figure

Test:U:231.1V I:0.6529A P:148.0W PF:0.9808 Lamp Flux:22627.4x1 lm		
NAME: 270817	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.:	SUR.:0.15*0.15	PROTECTION ANGLE:

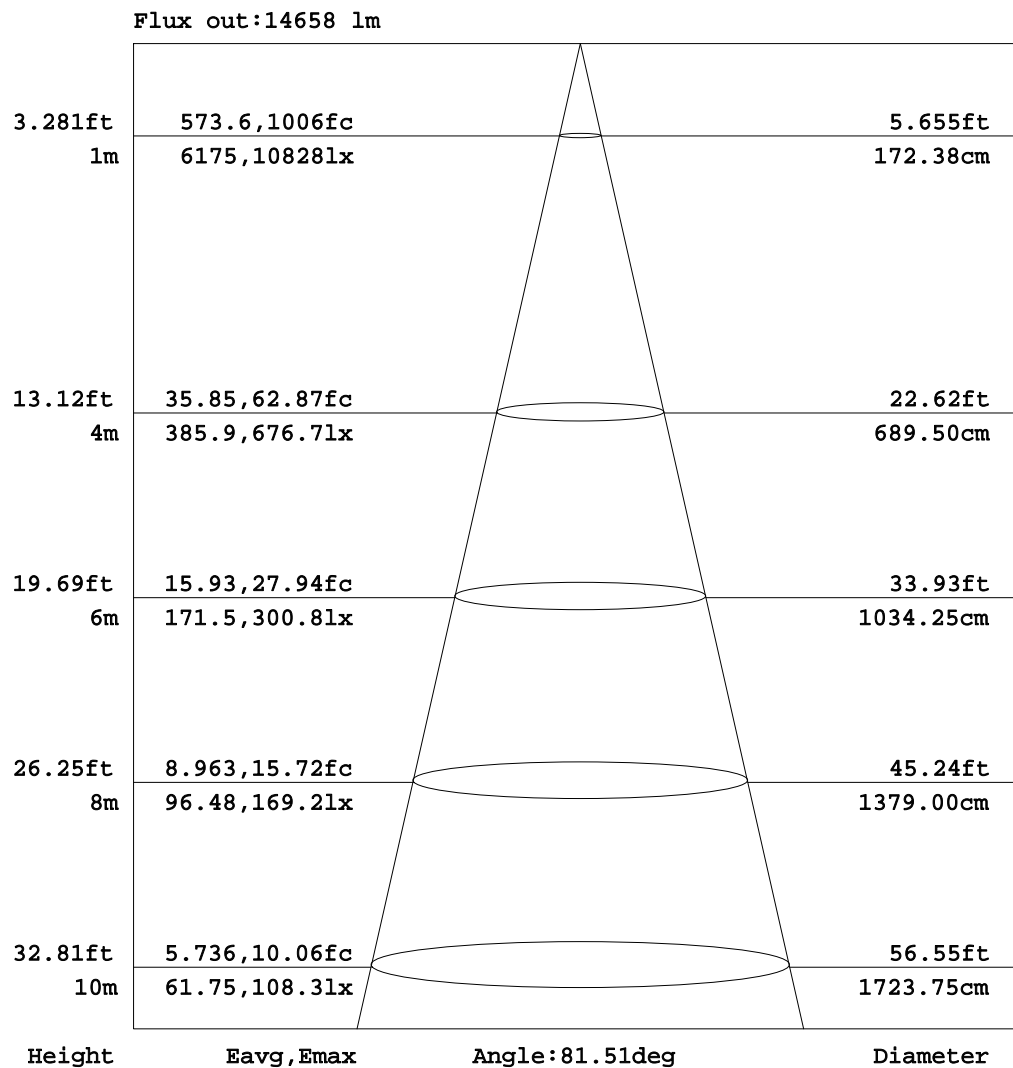


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-09-19

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.267
Humidity: 65.0%
Test Distance: 7.180m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:231.1V I:0.6529A P:148.0W PF:0.9808 Lamp Flux:22627.4x1 lm		
NAME: 270817	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.:	SUR.:0.15*0.15	PROTECTION ANGLE:

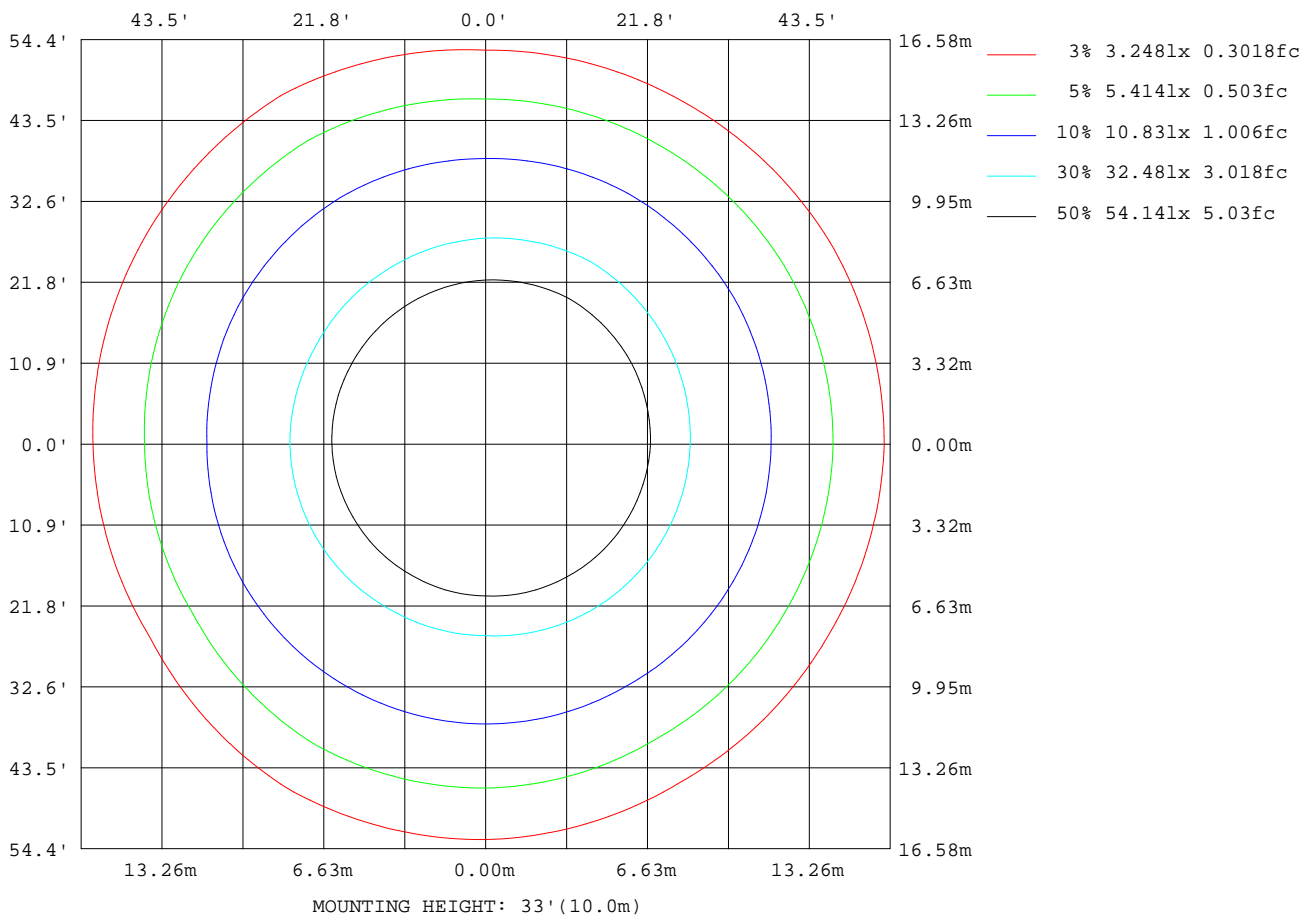

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-09-19

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.267
Humidity:65.0%
Test Distance:7.180m [K=1.0000]
Remarks:

Planar Illuminance Curve

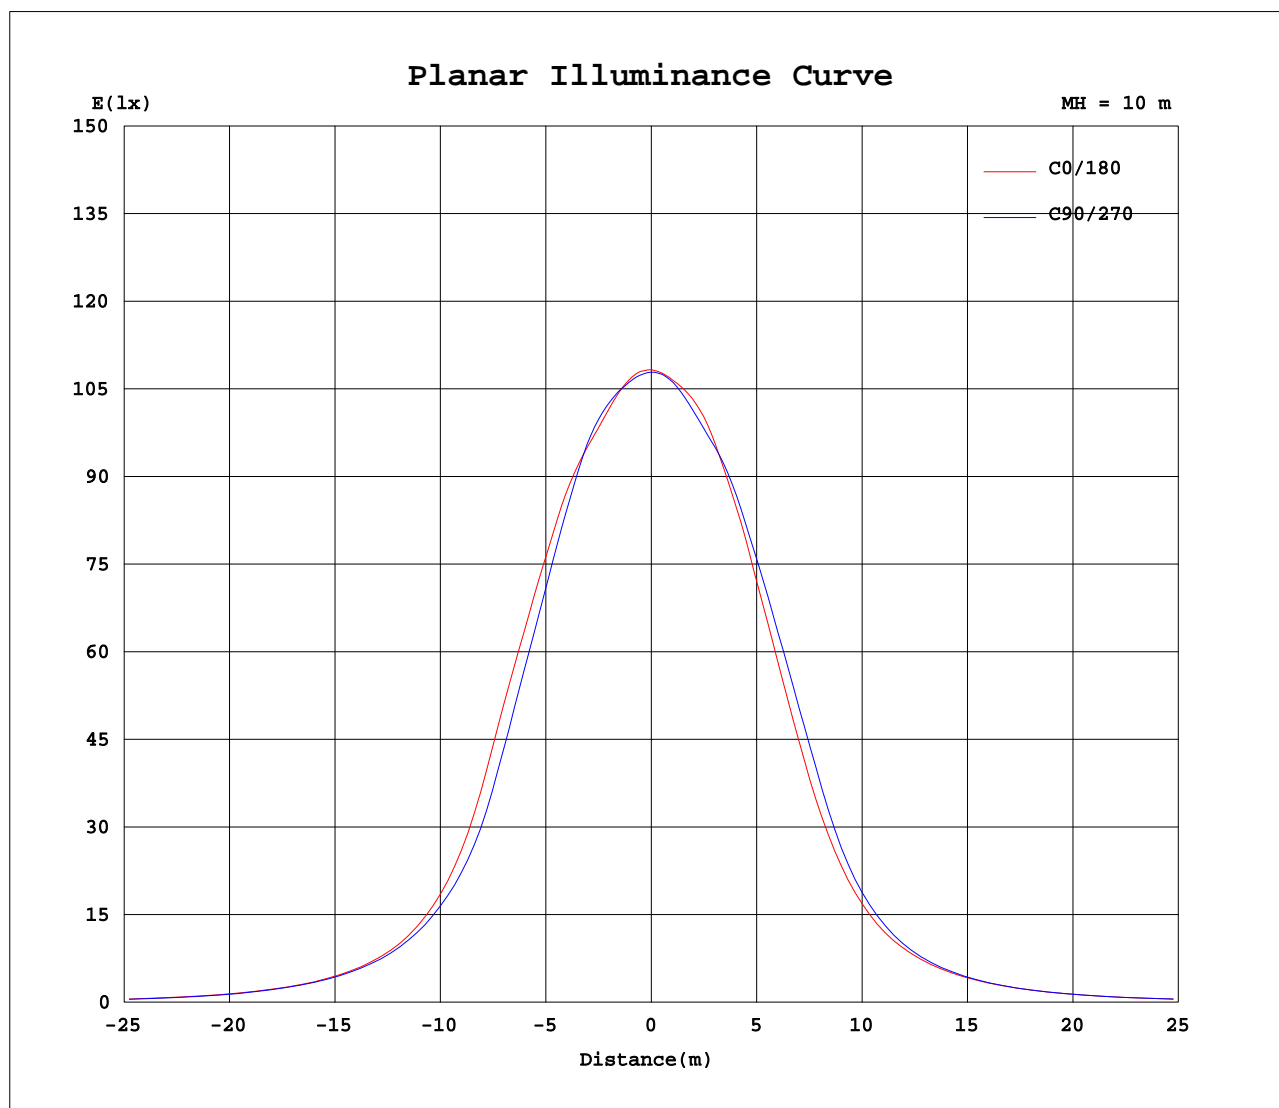

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-09-19

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.267
Humidity: 65.0%
Test Distance: 7.180m [K=1.0000]
Remarks:

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.267
Humidity:65.0%
Test Distance:7.180m [K=1.0000]
Remarks:

```