

# Light Measurement Report

Print date: 30-6-2025

Measurement date and time: 30-6-2025 16:07:18 – Measurement no. VFR-250630-1815-MS

Measurement tracking No. and Link: [VT250630-004993](https://www.viso-systems.com/track/VT250630-004993)

Operator:



## Laboratory and Equipment

Laboratory Owner and Location  
Goniospectrometer System and Type  
Sensor Name, Calibr. Date and Serial No.  
Spectrometer Manufacturer and Model

Viso Systems, Copenhagen V, Denmark  
LabSpion – Type C, horizontal  
LabSensor Model2 – 11-1-2024 – 3130191315  
Ibsen Photonics, Denmark – Freedom VIS (Custom Viso)

## Measurement Conditions

Number of C-planes and Resolution  
 $\gamma$  (gamma)-Resolution  
Test Distance  
Input Power, Power and Displ. Factors  
Input RMS Voltage and Current  
Frequency of Input Power  
Warm-up Time and Variation

16 planes – 22,5°  
5°  
1,99 m  
30,6 W – PF 0,99 – DPF 1,0  
230 V – 0,134 A  
50 Hz  
Lamp stabilized in 17 min 40 sec – 2,0%

## Tested Light Source



Product Name  
Item No. and Manufacturer  
Product Description (line 1)

811501-3000K  
811501-3000K – Dutchfulfillment  
LED FLOODLIGHT ISTOS | 30W | CCT-SWITCH

## Main Light Measurement Results

Output – Total Lumen (Up% / Down%)  
Efficiency  
Peak Intensity and Beam Angle  
Correlated Color Temperature, Target/Measured  
Color Rendering Index  
Color Rendering TM30-18  
Color Shift, CIE duv and MacAdam Steps  
Flicker

2717 lm – 0,04% / 99,96%  
89 lm/W  
1151 cd – 101,4°  
CCT = 3000 K / 2975 K  
CRI 79,8  
 $R_f$  80,0 –  $R_g$  98,6  
Duv -0,0016 – SDCM 1,6  
SVM 3,73 – PstLM 0,07

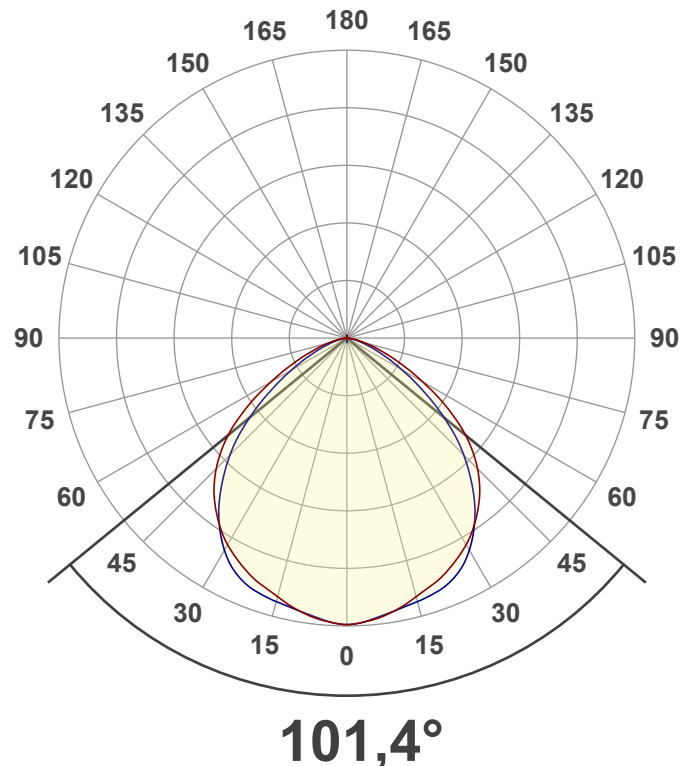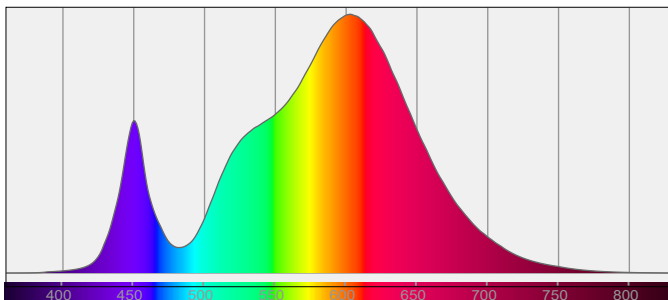

# Light Measurement Report

Print date: 30-6-2025

Measurement date and time: 30-6-2025 16:07:18 – Measurement no. VFR-250630-1815-MS


Measurement tracking No. and Link: [VT250630-004993](https://www.viso-systems.com/VT250630-004993)

Operator:



## Luminous Intensity diagram

Unit: 0-100% of peak intensity

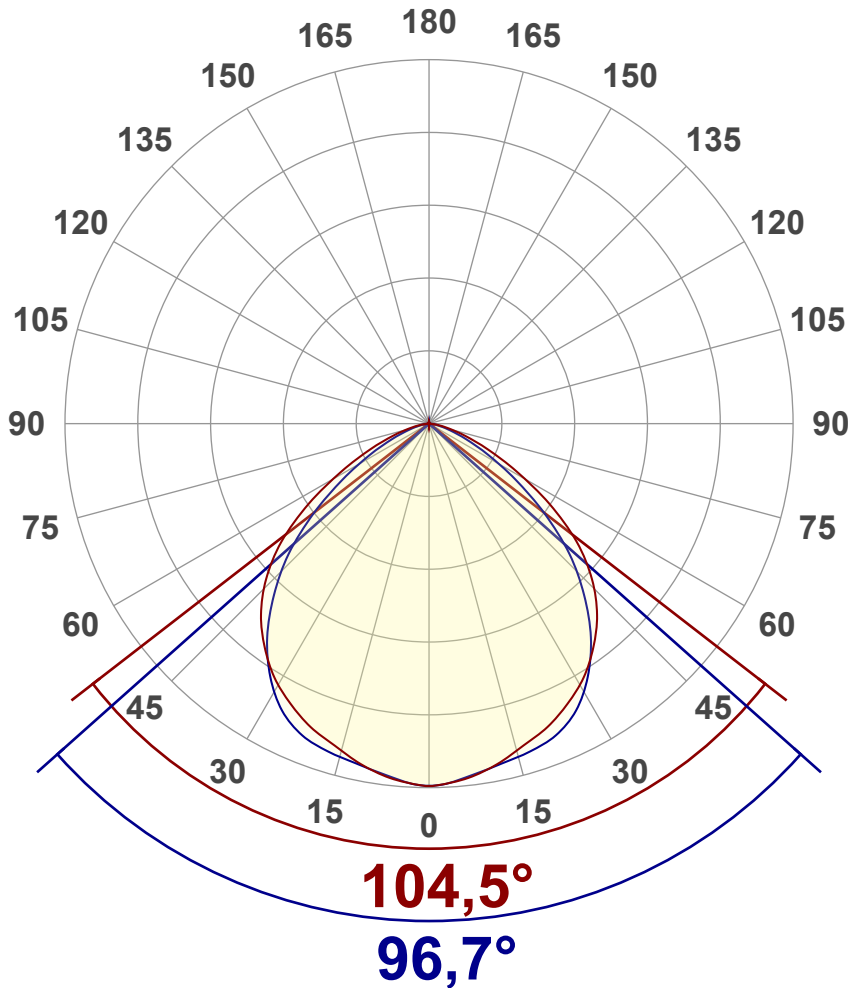

## Main Values

Output (total Lumen)	2717 lm
Lumen Up% / Down%	0,04% / 99,96%
Peak Intensity	1151 cd
Beam Angle (50%)	101,4°
Beam Angle (90%)	96,7°
Beam Angle (10%)	104,5°

## Cut-off Angle

Average 2,5%	160,7°
--------------	--------

## Field Angle

Average 10%	140,5°
-------------	--------


## Intensity Ratio

In 120° cone	89,5%
In 90° cone	64,9%

**C000-C180**

**C090-C270**

## Linear distribution diagram - Intensity (candela) vs $\gamma$ -angle

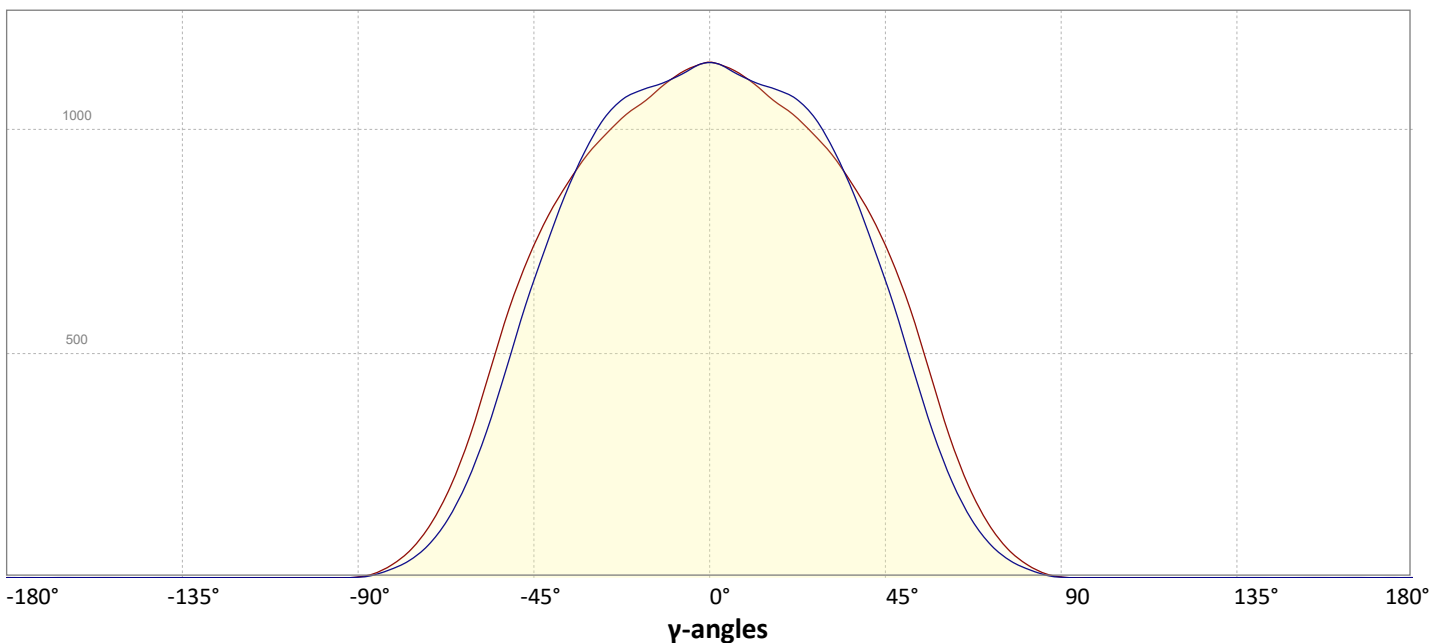

# Light Measurement Report

Print date: 30-6-2025


Measurement date and time: 30-6-2025 16:07:18 – Measurement no. VFR-250630-1815-MS

Measurement tracking No. and Link: [VT250630-004993](https://www.viso-systems.com/VT250630-004993)

Operator:



## Iso-intensity Diagram (Iso-candela)

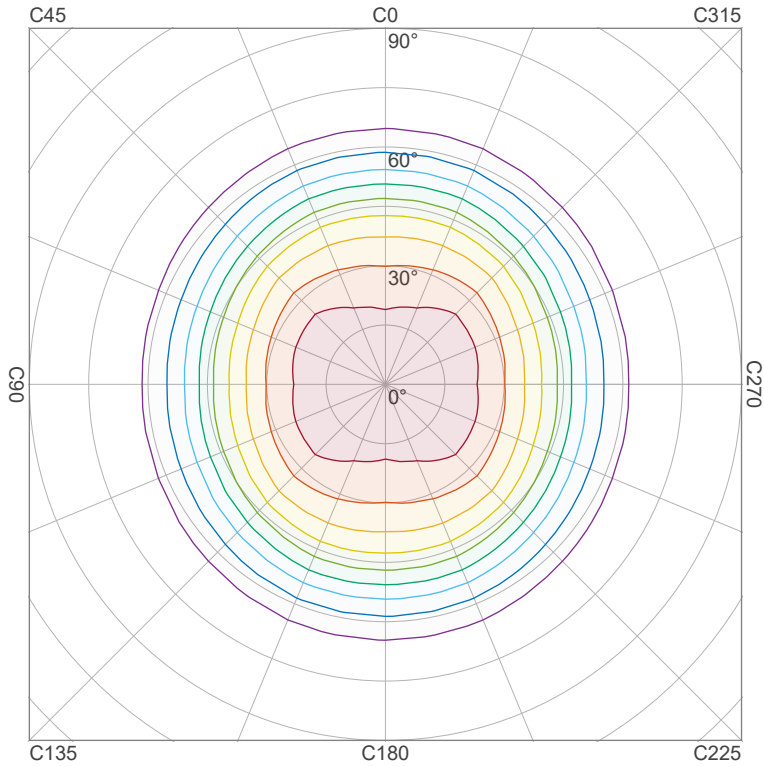


90 %	1035,5 cd
80 %	920,5 cd
70 %	805,4 cd
60 %	690,3 cd
50 %	575,3 cd
40 %	460,2 cd
30 %	345,2 cd
20 %	230,1 cd
10 %	115,1 cd

Peak intensity: 1150,6 cd

Number of c-planes: 16

## Iso-illuminance Diagram (Iso-lux)

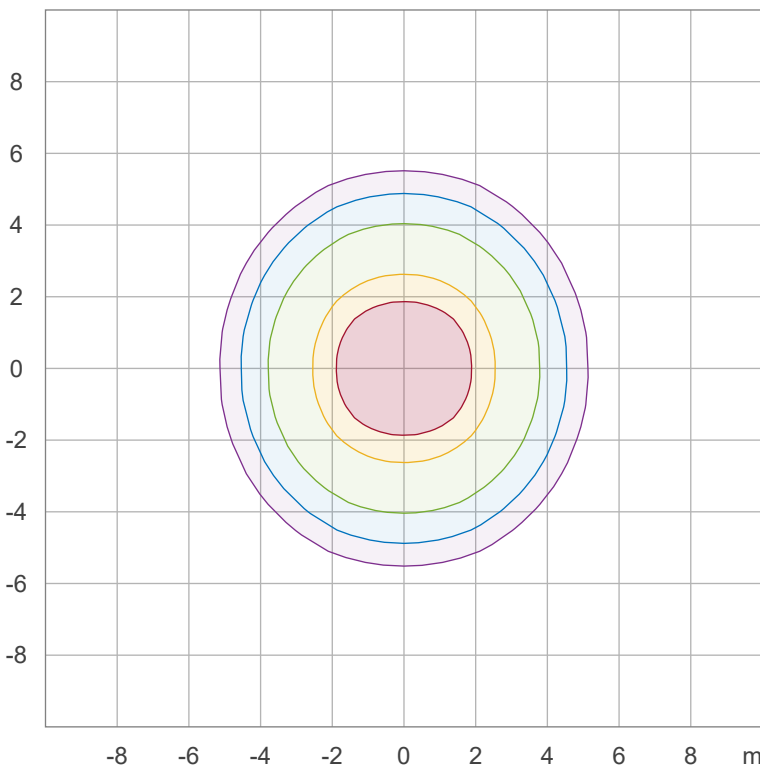

50,0 %	63,8 lx
30,0 %	38,3 lx
10,0 %	12,8 lx
5,0 %	6,4 lx
3,0 %	3,8 lx

Peak illuminance: 127,7 lx

Mounting height: 3,0 m

Number of c-planes: 16

# Light Measurement Report

Print date: 30-6-2025

Measurement date and time: 30-6-2025 16:07:18 – Measurement no. VFR-250630-1815-MS

Measurement tracking No. and Link: [VT250630-004993](https://www.viso-systems.com/VT250630-004993)

Operator:




## Color details


Correlated Color Temperature, Target CCT = 3000 K  
 Correlated Color Temperature, Measured CCT = 2975 K  
 Color Rendering Index CRI 79,8  
 Color Rendering Index, R9 (red component) R9 = -0,3  
 Color Rendering TM30-18 R<sub>f</sub> 80,0 – R<sub>g</sub> 98,6  
 Color Quality Scale CQS = 77,8

MacAdam Steps SDCM = 1,6  
 Color coordinates CIE 1931 (x;y) = (0,437;0,404)  
 Color coordinate CIEs 1960 (u;v) = (0,251;0,348)  
 Color deviation from BBL Duv = -0,0016  
 Color coordinate CIEs 1976 (CIELUV) (u';v') = (0,251;0,521)


### CIE 1931

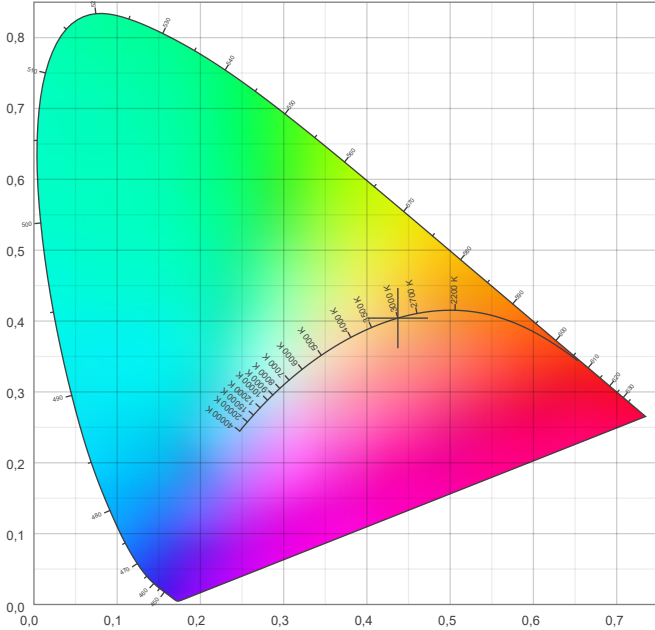

### CIE 1931 – zoomed on Planckian locus

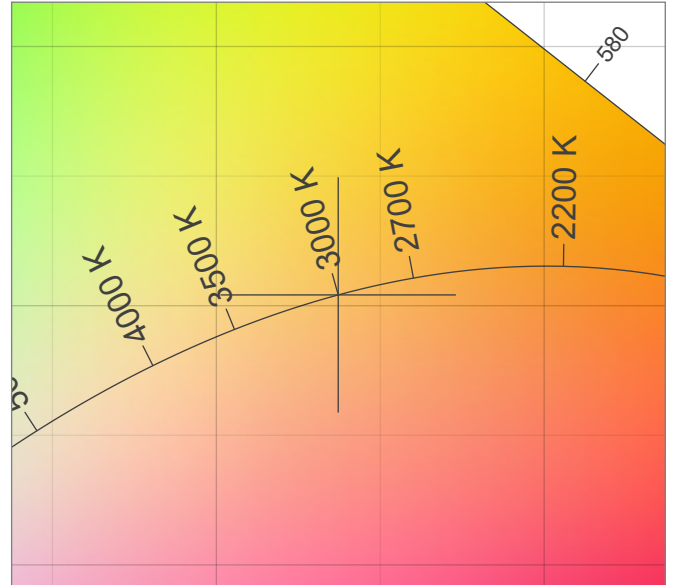


### Color Rendering Index per reference color (CIE 1995)

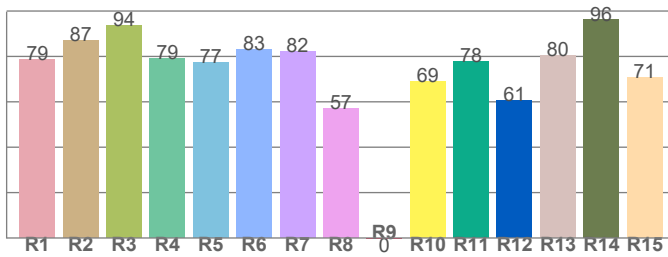


CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
78,6	87,0	93,7	79,0	77,5	82,9	82,3	57,2	-0,3	69,1	77,6	60,7	80,4	96,1	70,7

### Spectral power distribution (SPD) / W/nm – 0-100%

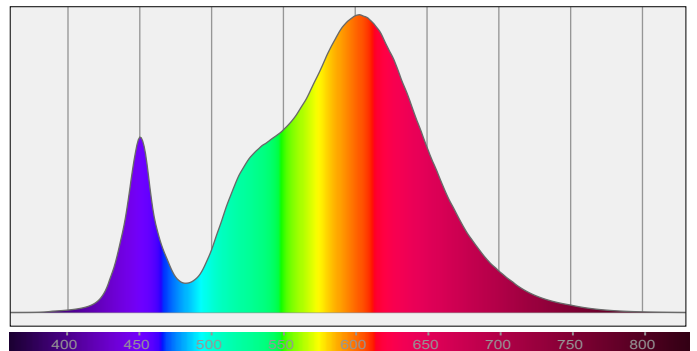


### TM30-18 Rf-values per hue bin

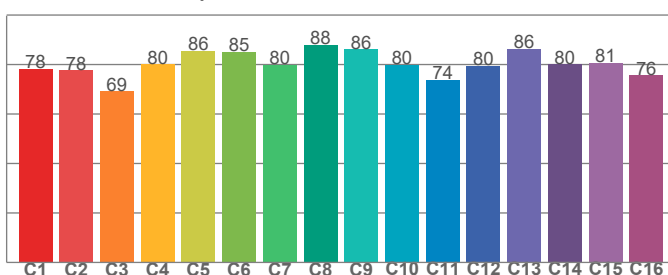

TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
78,3	77,6	69,3	80,0	85,5	85,2	79,9	88,0	86,2	80,0	73,9	79,6	86,4	80,2	80,7	75,7

### Color Quality Scale by reference color

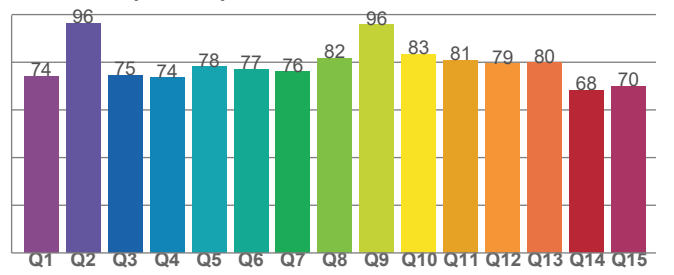

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
74,1	96,5	74,6	73,5	78,2	77,0	76,0	81,7	95,7	83,5	80,9	79,5	79,8	68,3	70,1

# Light Measurement Report

Print date: 30-6-2025


Measurement date and time: 30-6-2025 16:07:18 – Measurement no. VFR-250630-1815-MS

Measurement tracking No. and Link: [VT250630-004993](https://www.viso-systems.com/VT250630-004993)

Operator:



## Beam Details

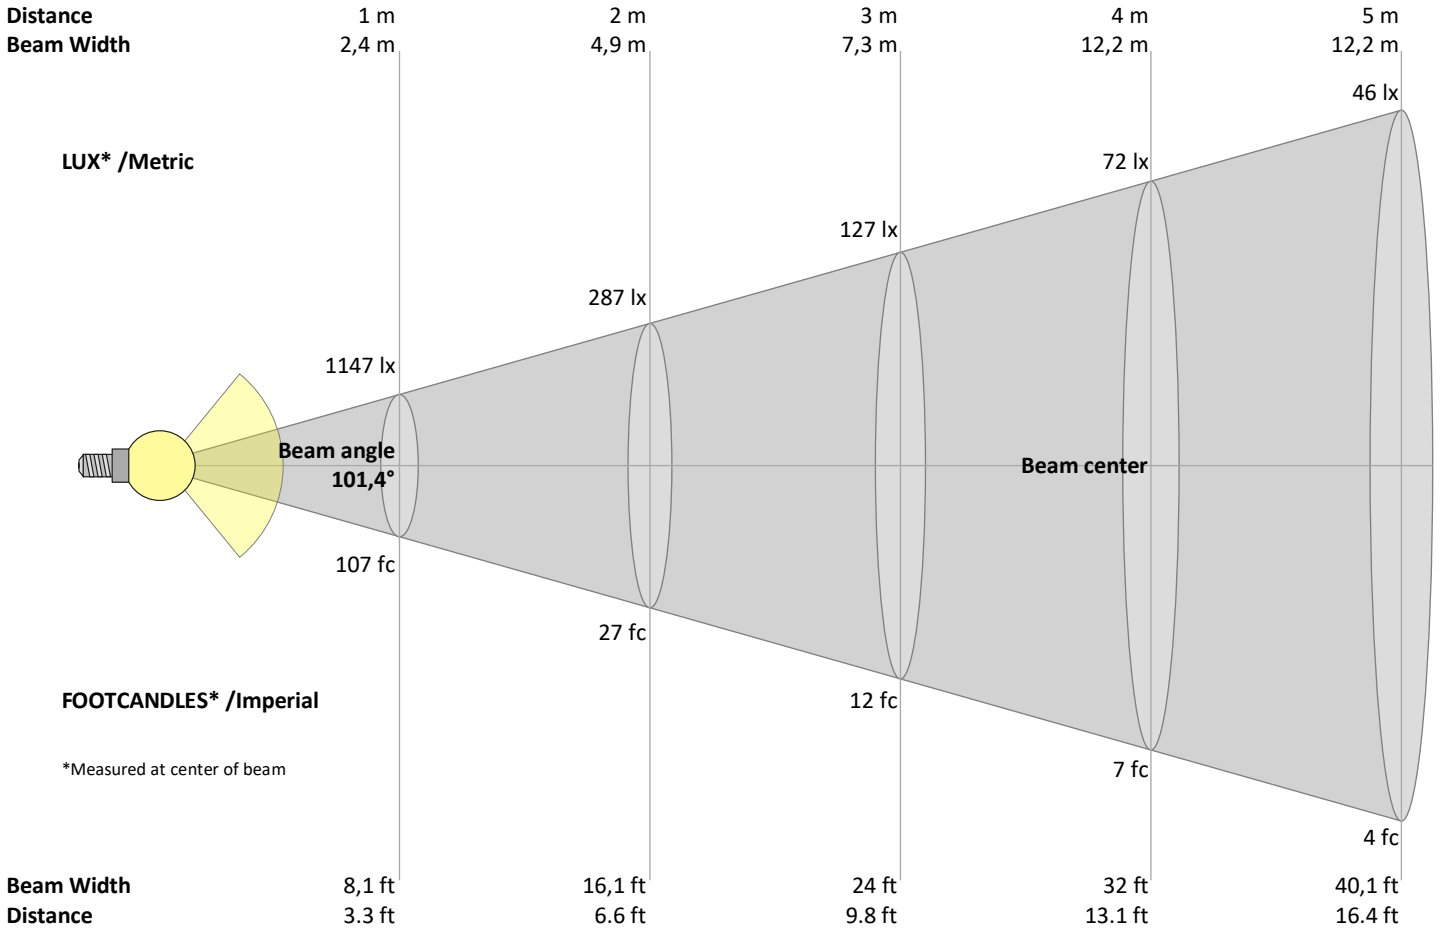

### Beam intensities from 1 – 20 m

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	m
3,3	6,6	9,8	13,1	16,4	19,7	23	26,2	29,5	32,8	36,1	39,4	42,7	45,9	49,2	52,5	55,8	59,1	62,3	65,6	ft
1147	287	127	72	46	32	23	18	14	11	9	8	7	6	5	4	4	4	3	3	lux
106,6	26,6	11,8	6,7	4,3	3	2,2	1,7	1,3	1,1	0,9	0,7	0,6	0,5	0,5	0,4	0,4	0,3	0,3	0,3	fc

### Intensities in 0° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°	γ
1147	1136	1110	1075	1042	1003	956	897	827	739	631	496	355	234	143	79	38	14	3	0	cd
100%	99%	97%	94%	91%	87%	83%	78%	72%	64%	55%	43%	31%	20%	12%	7%	3%	1%	0%	0%	of 0°val

### Intensities in 90° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°	γ
1147	1133	1111	1095	1077	1042	980	892	783	661	525	385	261	165	96	52	26	9	2	0	cd
100%	99%	97%	95%	94%	91%	85%	78%	68%	58%	46%	34%	23%	14%	8%	5%	2%	1%	0%	0%	of 0°val

### Intensities in 180° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°	γ
1147	1136	1110	1075	1042	1003	956	897	827	739	631	496	355	234	143	79	38	14	3	0	cd
100%	99%	97%	94%	91%	87%	83%	78%	72%	64%	55%	43%	31%	20%	12%	7%	3%	1%	0%	0%	of 0°val

### Intensities in 270° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°	γ
1147	1133	1111	1095	1077	1042	980	892	783	661	525	385	261	165	96	52	26	9	2	0	cd
100%	99%	97%	95%	94%	91%	85%	78%	68%	58%	46%	34%	23%	14%	8%	5%	2%	1%	0%	0%	of 0°val

# Light Measurement Report

Print date: 30-6-2025

Measurement date and time: 30-6-2025 16:07:18 – Measurement no. VFR-250630-1815-MS

Measurement tracking No. and Link: [VT250630-004993](#)

Operator:



## Light Planning – UGR table

Uncorrected, comprehensive UGR table according to 117-1995

Reflectances		70	70	50	50	30	70	70	50	50	30
	ρ Ceiling	70	70	50	50	30	70	70	50	50	30
	ρ Walls	50	30	50	30	30	50	30	50	30	30
	ρ Floor	20	20	20	20	20	20	20	20	20	20
Room size		Viewed Crosswise					Viewed Endwise				
H = mounting height above eye level		(Viewing direction orthogonal to lamp length axis)					(Viewing direction parallel to lamp length axis)				
X	Y										
2H	2H	28,3	29,4	28,5	29,7	29,9	27,2	28,2	27,4	28,5	28,7
	3H	28,8	29,9	29,2	30,2	30,4	27,4	28,5	27,8	28,8	29,0
	4H	28,9	30,0	29,3	30,3	30,5	27,5	28,5	27,9	28,8	29,1
	6H	29,0	30,0	29,3	30,2	30,6	27,5	28,5	27,9	28,7	29,1
	8H	29,0	29,9	29,3	30,2	30,6	27,5	28,4	27,8	28,7	29,1
	12H	29,0	29,8	29,3	30,2	30,6	27,5	28,3	27,8	28,7	29,1
4H	2H	28,4	29,5	28,8	29,8	30,0	27,5	28,5	27,9	28,8	29,0
	3H	29,2	30,0	29,5	30,4	30,8	27,9	28,8	28,3	29,2	29,6
	4H	29,3	30,1	29,7	30,5	31,0	28,0	28,8	28,4	29,2	29,7
	6H	29,4	30,1	29,9	30,5	30,8	28,0	28,8	28,5	29,1	29,5
	8H	29,4	30,1	29,9	30,4	30,8	28,0	28,7	28,5	29,1	29,4
	12H	29,3	29,9	29,8	30,3	30,8	28,0	28,5	28,5	29,0	29,4
8H	4H	29,2	29,9	29,8	30,3	30,7	28,0	28,7	28,5	29,1	29,4
	6H	29,4	29,9	29,9	30,4	30,9	28,1	28,6	28,6	29,1	29,6
	8H	29,4	29,9	29,9	30,4	31,0	28,1	28,6	28,6	29,1	29,7
	12H	29,4	29,8	30,0	30,3	30,9	28,1	28,5	28,7	29,0	29,6
12H	4H	29,2	29,8	29,7	30,2	30,7	28,0	28,5	28,5	29,0	29,4
	6H	29,4	29,8	29,9	30,3	31,0	28,1	28,5	28,6	29,1	29,7
	8H	29,4	29,8	30,0	30,3	30,9	28,1	28,5	28,7	29,0	29,6

### Variations with the observer position for the luminaire spacings, S:

S = 1.0H	0,2 / -0,3	0,4 / -0,6
S = 1.5H	0,8 / -1,2	0,9 / -1,8
S = 2.0H	1,8 / -2,6	1,9 / -3,2

## Coefficients of Utilization

Ceiling reflectance	80			70			50			30			10			0		
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio)																	
	Room Values are expressed as percentage of Lumen delivered to the task surface																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	111	107	103	100	108	104	101	98	100	98	95	96	94	92	93	91	89	88
2	102	95	89	84	99	93	87	83	89	85	81	86	82	79	83	80	77	75
3	94	84	77	71	91	83	76	71	80	74	70	77	72	68	75	71	67	65
4	86	76	68	62	84	74	67	61	72	65	60	70	64	60	68	63	59	57
5	80	68	60	54	78	67	59	53	65	58	53	63	57	52	61	56	52	50
6	74	62	53	47	72	61	53	47	59	52	47	57	51	46	56	50	46	44
7	69	56	48	42	67	55	48	42	54	47	42	52	46	41	51	45	41	39
8	64	51	43	38	63	51	43	38	49	42	37	48	42	37	47	41	37	35
9	60	47	39	34	59	47	39	34	46	39	34	44	38	34	43	38	34	32
10	56	44	36	31	55	43	36	31	42	35	31	41	35	31	40	35	31	29

# Light Measurement Report

Print date: 30-6-2025

Measurement date and time: 30-6-2025 16:07:18 – Measurement no. VFR-250630-1815-MS

Measurement tracking No. and Link: [VT250630-004993](https://www.viso-systems.com/VT250630-004993)


Operator:



## Luminaire budgetary diagram

Uncorrected, comprehensive UGR table according to 117-1995

LAMPS (number of lamps)

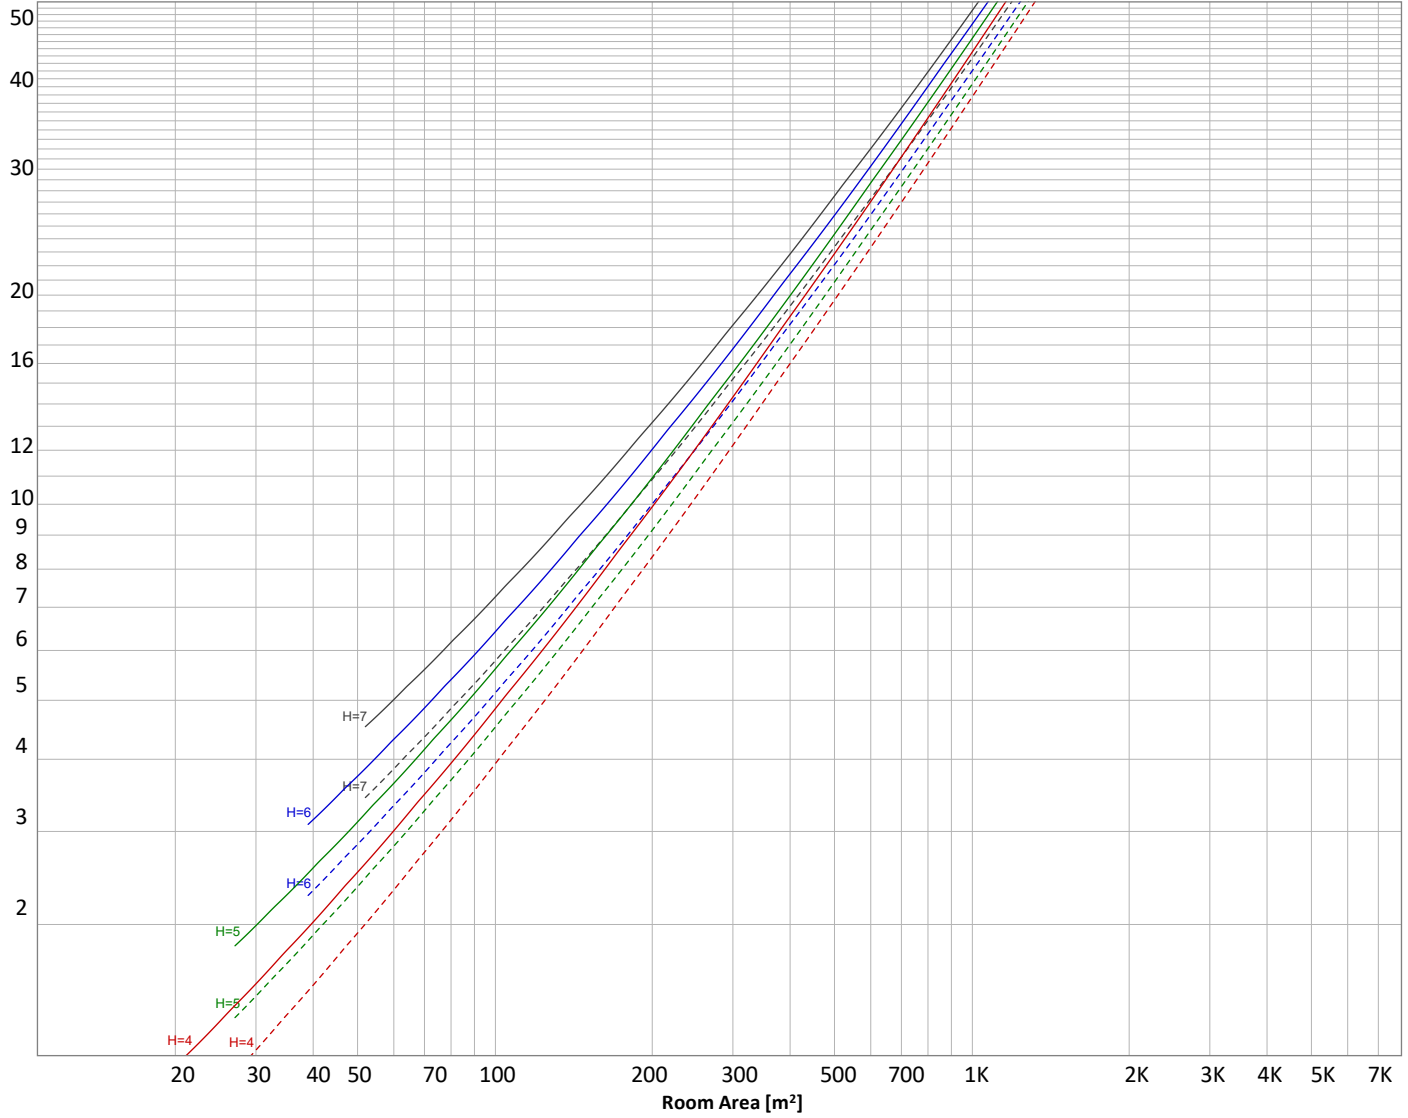

### Conditions

H = Room height	Flux = 2717 lm				
H <sub>down</sub> = Lamp distance from ceiling =	0.00 m	Line type	Ceiling reflectance	ρ(%) Wall reflectance	Floor reflectance
H <sub>work</sub> = Work area height from floor =	0.00 m	-----	70	50	30
E <sub>work</sub> = Average lux on work area =	100 lx	—————	50	30	20

### Zonal Lumen Summary

0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
109 lm	313 lm	480 lm	574 lm	554 lm	402 lm	202 lm	69,5 lm	13,0 lm
90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
0,140 lm	0,057 lm	0,098 lm	0,138 lm	0,173 lm	0,157 lm	0,125 lm	0,081 lm	0,027 lm

# Light Measurement Report

Print date: 30-6-2025

Measurement date and time: 30-6-2025 16:07:18 – Measurement no. VFR-250630-1815-MS

Measurement tracking No. and Link: [VT250630-004993](https://www.viso-systems.com/VT250630-004993)

Operator:



## Outdoor Light Planning

### Lumen per Zone

Zone (γ)	Lumen	% Total
0-10°	109 lm	4,0%
10-20°	313 lm	11,5%
20-30°	480 lm	17,7%
30-40°	574 lm	21,1%
40-50°	554 lm	20,4%
50-60°	402 lm	14,8%
60-70°	202 lm	7,4%
70-80°	69 lm	2,6%
80-90°	13 lm	0,5%
90-100°	0 lm	0,0%
100-110°	0 lm	0,0%
110-120°	0 lm	0,0%
120-130°	0 lm	0,0%
130-140°	0 lm	0,0%
140-150°	0 lm	0,0%
150-160°	0 lm	0,0%
160-170°	0 lm	0,0%
170-180°	0 lm	0,0%
<b>Total</b>	<b>2717 lm</b>	<b>100,0%</b>

### Intensity peaks

Max intensity	1151 cd
Intensity, 90°	3 cd
Intensity, 0°	1147 cd

### Zonal Lumen summary


Zone (γ)	Lumen	% Total
0-30°	902 lm	33,2%
0-40°	1476 lm	54,3%
0-60°	2432 lm	89,5%
60-90°	284 lm	10,5%
70-100°	83 lm	3,0%
90-120°	0 lm	0,0%
0-90°	2716 lm	100,0%
90-180°	1 lm	0,0%
0-180°	2717 lm	100,0%

### BUG rating

	Lumen	% Total
<b>Forward light</b>		
Low(0-30°)	450 lm	16,6%
Medium(30-60°)	763 lm	28,1%
High(60-80°)	137 lm	5,1%
Very high(80-90°)	7 lm	0,3%
<b>Back light</b>		
Low(0-30°)	450 lm	16,6%
Medium(30-60°)	763 lm	28,1%
High(60-80°)	137 lm	5,1%
Very high(80-90°)	7 lm	0,3%
<b>Uplight</b>		
Low(90-100°)	0 lm	0,0%
High(100-180°)	1 lm	0,0%

## IESNA TM-15-07 Luminaire Classification System For Outdoor Luminaires

**BUG rating B1 U1 G0**

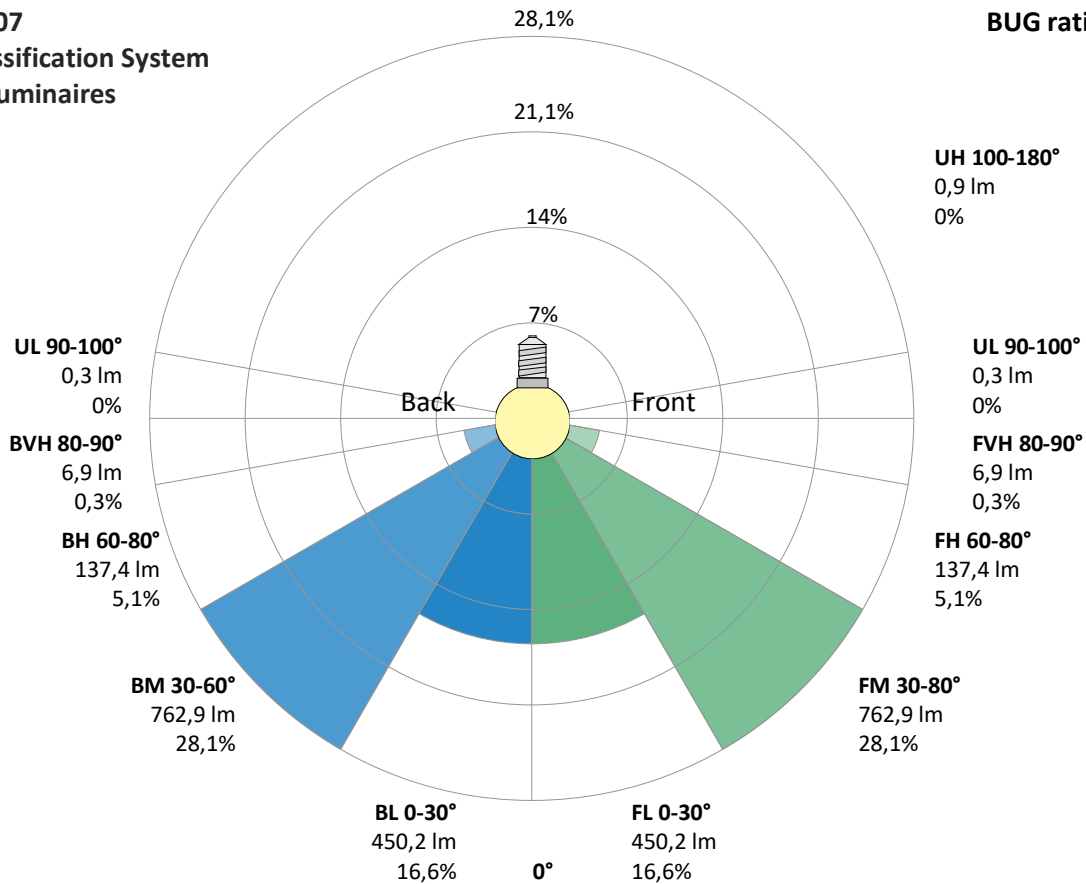

# Light Measurement Report

Print date: 30-6-2025

Measurement date and time: 30-6-2025 16:07:18 – Measurement no. VFR-250630-1815-MS

Measurement tracking No. and Link: [VT250630-004993](https://www.viso-systems.com/VT250630-004993)

Operator:




## Power Details


### Input Power

Power feed to light source	30,6 W
Frequency of input power	50 Hz
RMS Input voltage feed, $V_{RMS}$	230 V
RMS Input current feed, $I_{RMS}$	0,134 A
Volt-Ampere or apparent power = $V_{RMS} * I_{RMS}$	30,87 VA
Displacement factor of AC power feed	1,0
Power factor of AC current feed	0,99
Total harmonic distortion of the current	13,07%
Total harmonic distortion of the voltage	0,06%

### Input Power Curve

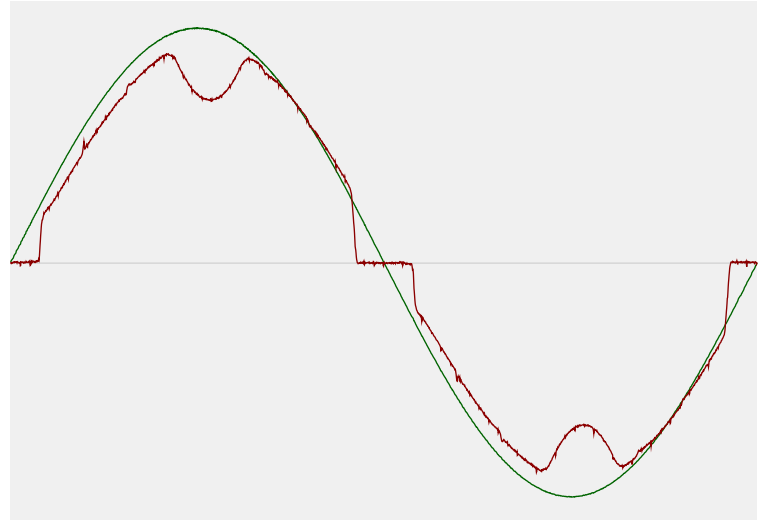

### Efficiency

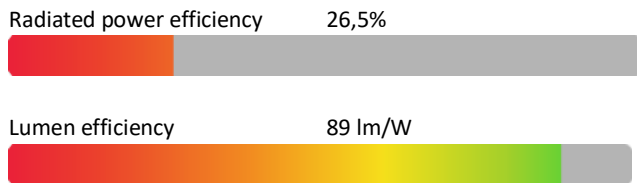

## Stabilization Details

### Warmup Conditions

Stable period	15 min
Stable change max	2,0%
Minimum time	15 min

### Color Temperature Change

CCT start	2995 K
CCT shift	+5 K
CCT end	3000 K


### Warmup Result

Total warmup time	Lamp stabilized in 17 min 40 sec
Warmup variation	-3,0%

### Output Change

Output start	2798 lm
Output change	-81 lm
Output end	2717 lm

### Stabilization Curve

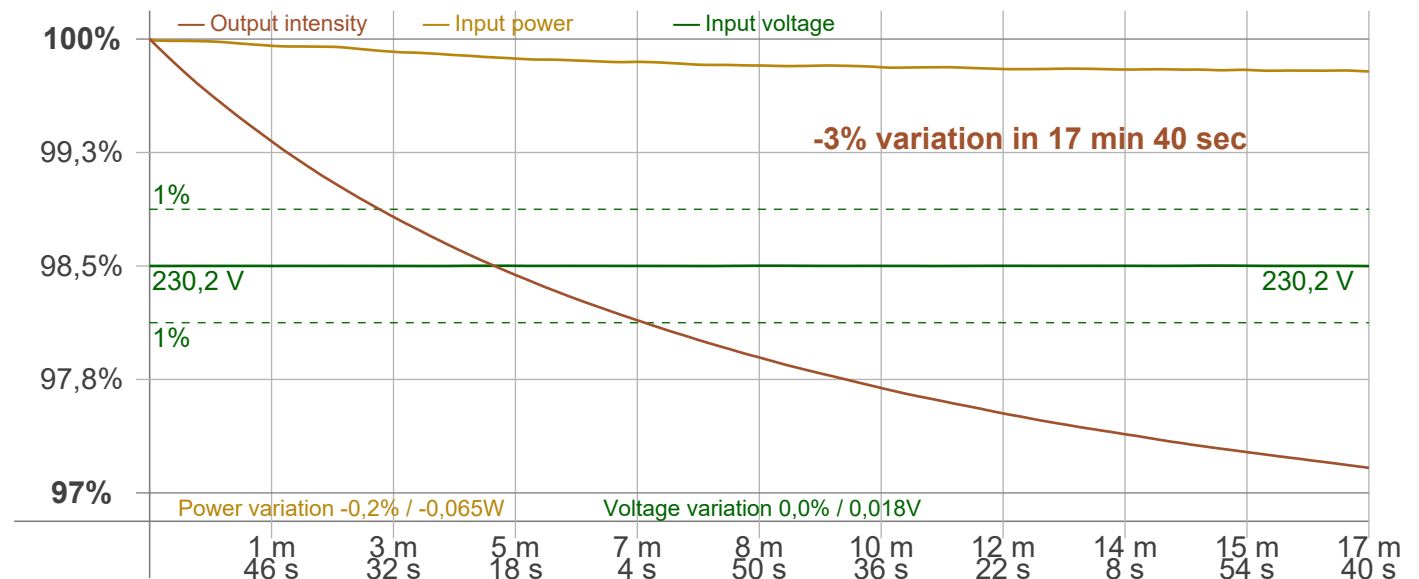

# Light Measurement Report

Print date: 30-6-2025

Measurement date and time: 30-6-2025 16:07:18 – Measurement no. VFR-250630-1815-MS

Measurement tracking No. and Link: [VT250630-004993](https://www.viso-systems.com/VT250630-004993)

Operator:



## Flicker /TLA details

Flicker Meter Type: Viso Systems LabFlicker  
 Frequency of input power: 50 Hz  
 Flicker/TLA sample rate: 20000 samples/s

**Measurement time**  
 PstLM: 180 sec  
 All other indices: 1,2 sec

### Flicker indices according to Illuminating Engineering Society (IES)

Flicker frequency: 100 Hz  
 Percent Flicker: 99,94 %  
 Flicker index: 0,32

### Flicker indices according to California Energy Commission (CEC) 2016b

JA8/10 40 Hz: 0,18 %  
 JA8/10 90 Hz: 0,83 %  
 JA8/10 200 Hz: 104,58 %  
 JA8/10 400 Hz: 100,83 %  
 JA8/10 1000 Hz: 102,47 %


### TLA indices (re IEC TR 61547-1, IEC 61000-3-3 and IEC 61000-4-15)

PstLM value (F < 80 Hz): 0,07  
 SVM value (80 < F < 2000 Hz): 3,73


### Flicker indices according to Lighting Research Center (2015)

Perception metric, Assist Mp: 0,03

Flicker frame (frame of one flicker period in time domain)

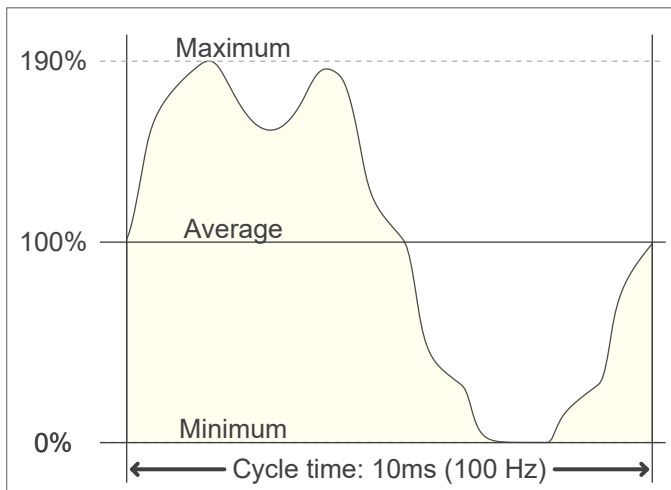

Flicker FFT (flicker curve in frequency domain)

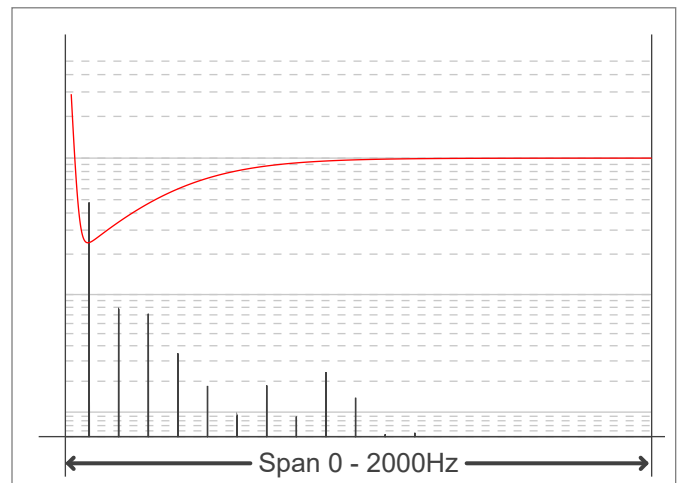

IEEE 1789 Frequency/modulation plot

