

Light Measurement Report

Print date: 26-6-2025

Measurement date and time: 26-6-2025 09:26:22 – Measurement no. VFR-250626-1754-MS

Measurement tracking No. and Link: [VT250626-000562](#)

Operator:



Laboratory and Equipment

Laboratory Owner and Location

Goniospectrometer System and Type

Sensor Name, Calibr. Date and Serial No.

Spectrometer Manufacturer and Model

Viso Systems, Copenhagen V, Denmark

LabSpion – Type C, horizontal

LabSensor Model2 – 11-1-2024 – 3130191315

Ibsen Photonics, Denmark – Freedom VIS (Custom Viso)

Measurement Conditions

Number of C-planes and Resolution

γ (gamma)-Resolution

Test Distance

Input Power, Power and Displ. Factors

Input RMS Voltage and Current

Frequency of Input Power

Warm-up Time and Variation

12 planes – 30°

5°

1,99 m

4,8 W – PF 0,4 – DPF 0,98

230 V – 0,052 A

50 Hz

Lamp stabilized in 15 min 3 sec – 2,0%

Tested Light Source

Product Name

Item No. and Manufacturer

Product Description (line 1)

FUT070-4000K

FUT070-4000K – Dutchfulfillment

MI-LIGHT REFLECTOR DOWNLIGHT RGB+CCT 6W

Main Light Measurement Results

Output – Total Lumen (Up% / Down%)

Efficiency

Peak Intensity and Beam Angle

Correlated Color Temperature, Target/Measured

Color Rendering Index

Color Rendering TM30-18

Color Shift, CIE duv and MacAdam Steps

Flicker

405 lm – 0,13% / 99,87%

84 lm/W

351 cd – 61,1°



CCT = 4000 K / 4081 K

CRI 85,0

R_f 84,5 – R_g 97,8

Duv -0,0031 – SDCM 3,2

SVM 0 – PstLM 0,08

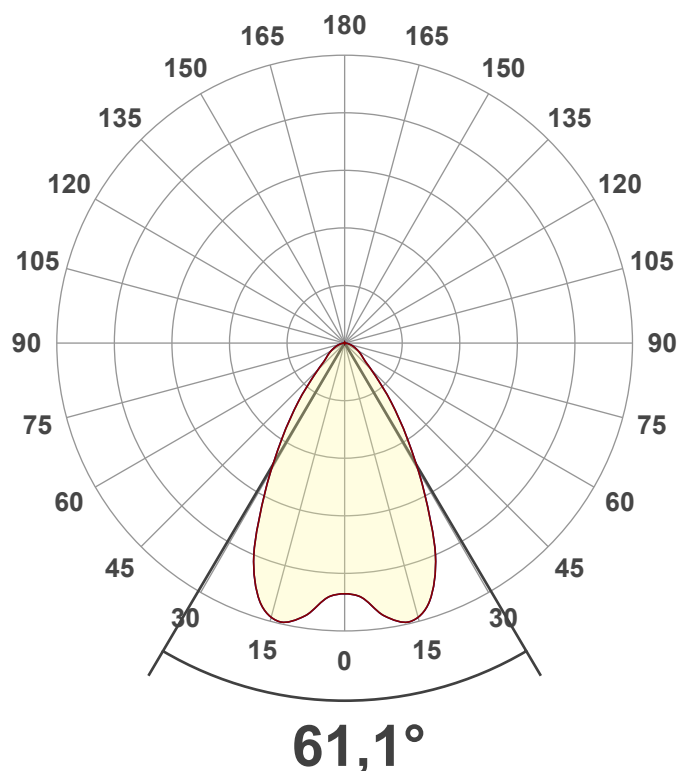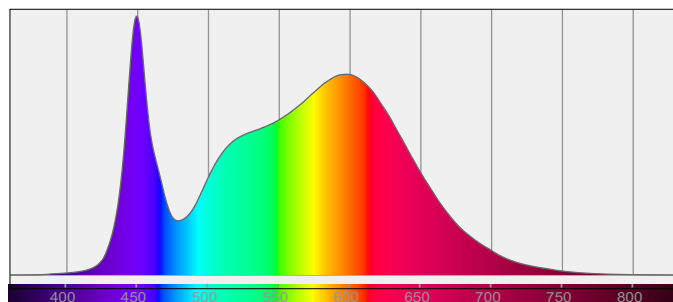

Light Measurement Report

Print date: 26-6-2025

Measurement date and time: 26-6-2025 09:26:22 – Measurement no. VFR-250626-1754-MS


Measurement tracking No. and Link: [VT250626-000562](#)

Operator:



Luminous Intensity diagram

Unit: 0-100% of peak intensity

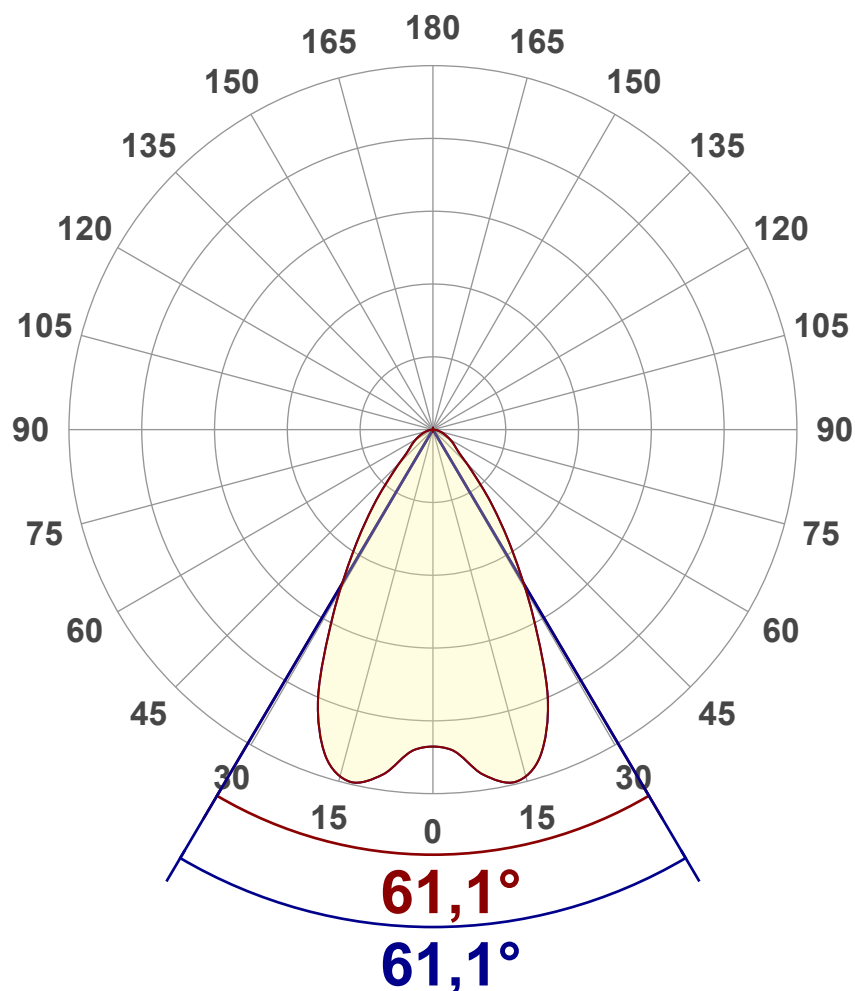

Main Values

Output (total Lumen)	405 lm
Lumen Up% / Down%	0,13% / 99,87%
Peak Intensity	351 cd
Beam Angle (50%)	61,1°
Beam Angle (90%)	61,1°
Beam Angle (10%)	61,1°

Cut-off Angle

Average 2,5%	144,9°
--------------	--------

Field Angle

Average 10%	96,1°
-------------	-------


Intensity Ratio

In 120° cone	93,9%
In 90° cone	84,7%

C000-C180

C090-C270

Linear distribution diagram - Intensity (candela) vs γ-angle

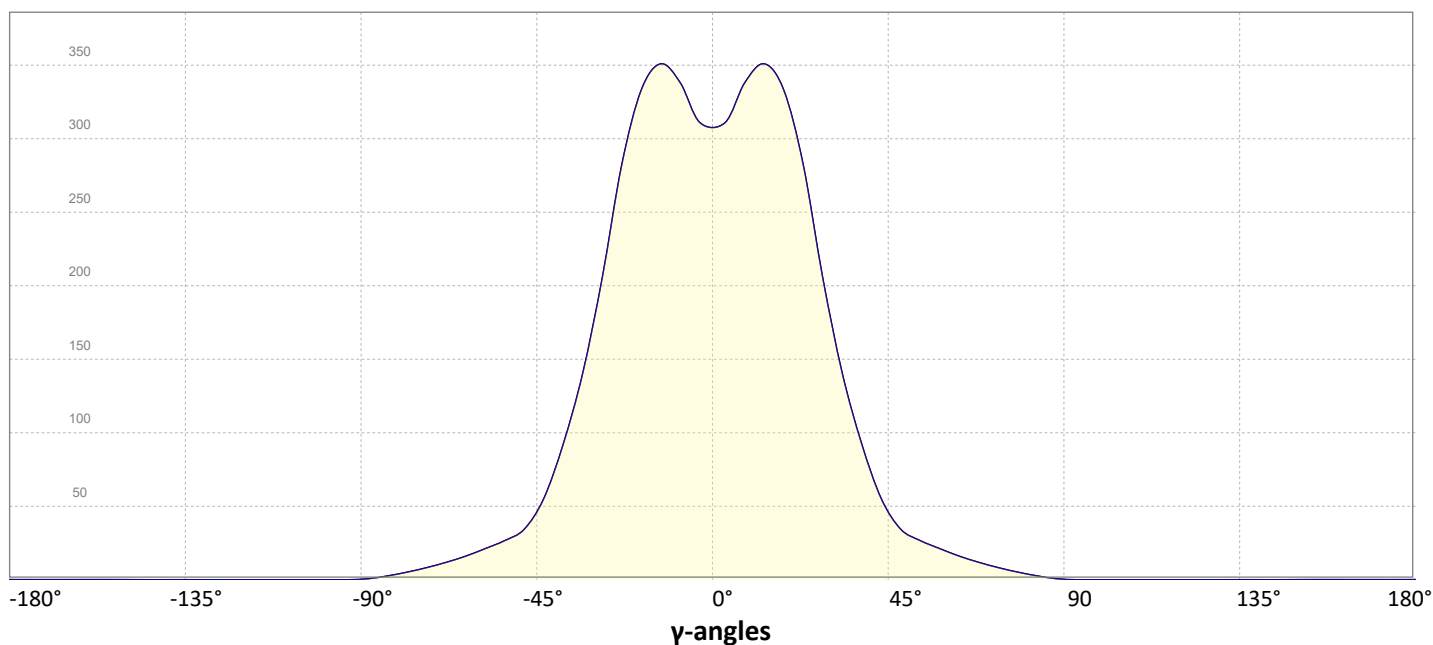


Light Measurement Report


Print date: 26-6-2025
Measurement date and time: 26-6-2025 09:26:22 – Measurement no. VFR-250626-1754-MS
Measurement tracking No. and Link: [VT250626-000562](#)
Operator:



Iso-intensity Diagram (Iso-candela)

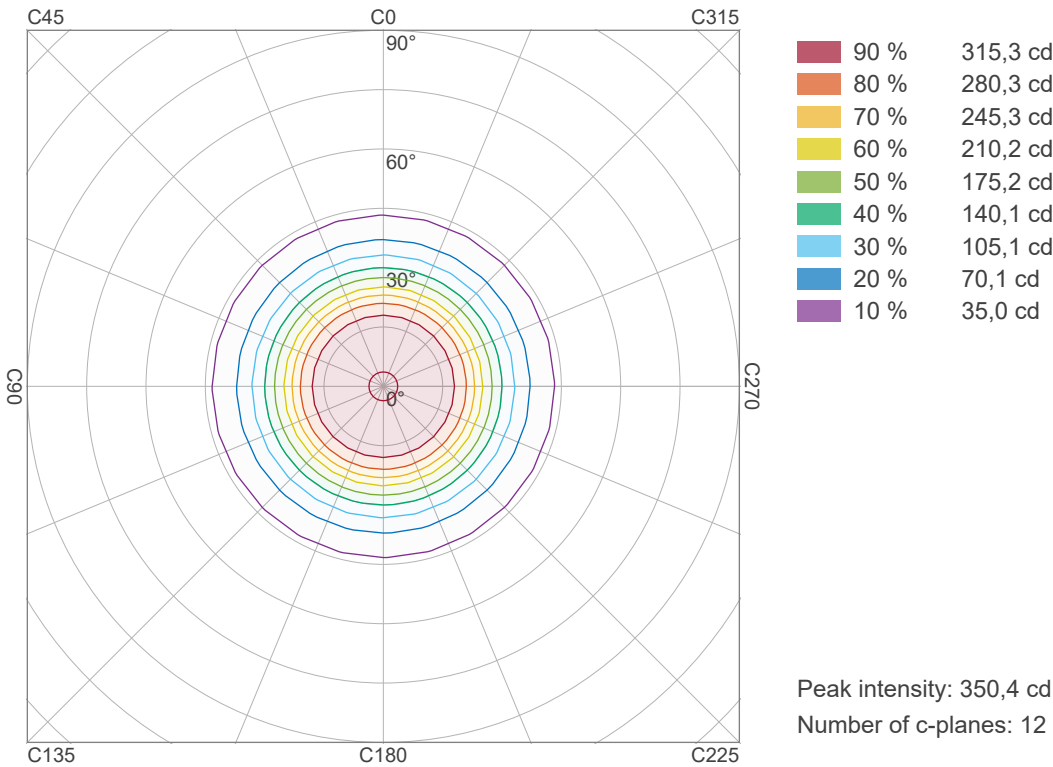

Iso-illuminance Diagram (Iso-lux)

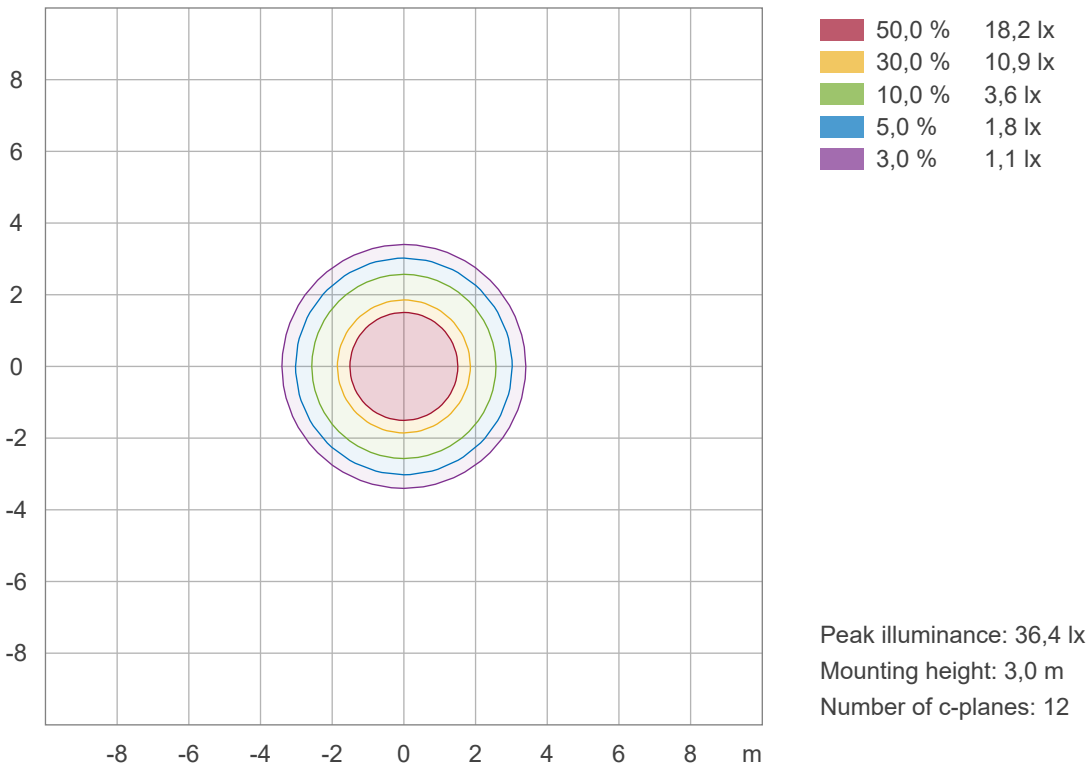

Light Measurement Report

Print date: 26-6-2025

Measurement date and time: 26-6-2025 09:26:22 – Measurement no. VFR-250626-1754-MS

Measurement tracking No. and Link: [VT250626-000562](https://www.viso-systems.com/VT250626-000562)

Operator:




Color details


Correlated Color Temperature, Target CCT = 4000 K
Correlated Color Temperature, Measured CCT = 4081 K
Color Rendering Index CRI 85,0
Color Rendering Index, R9 (red component) R9 = 16,5
Color Rendering TM30-18 R_f 84,5 – R_g 97,8
Color Quality Scale CQS = 82,9

MacAdam Steps
Color coordinates CIE 1931 (x;y) = (0,381;0,377)
Color coordinate CIEs 1960 (u;v) = (0,225;0,334)
Color deviation from BBL Duv = -0,0031
Color coordinate CIEs 1976 (CIELUV) (u';v') = (0,225;0,502)


CIE 1931

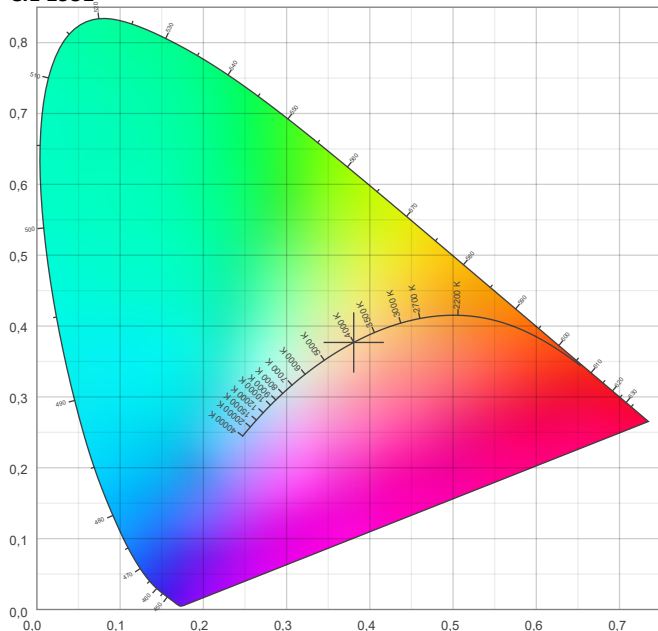

CIE 1931 – zoomed on Planckian locus

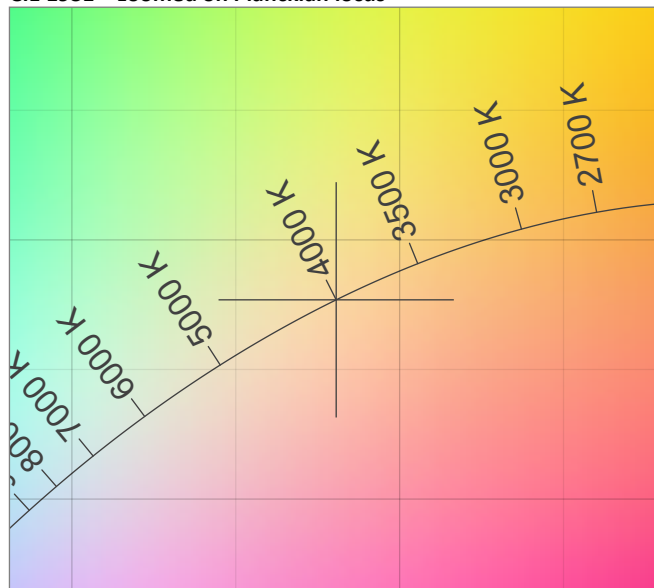


Color Rendering Index per reference color (CIE 1995)

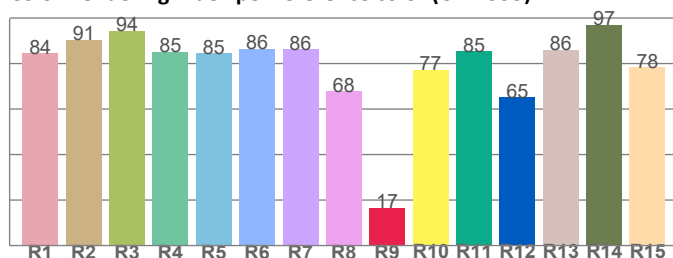


CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
84,4	90,5	94,5	85,2	84,6	86,5	86,3	67,7	16,5	77,3	85,4	65,1	86,1	97,1	78,3

Spectral power distribution (SPD) / W/nm – 0-100%

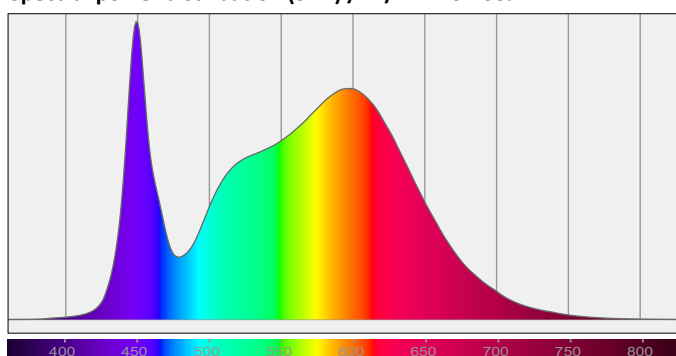


TM30-18 Rf-values per hue bin

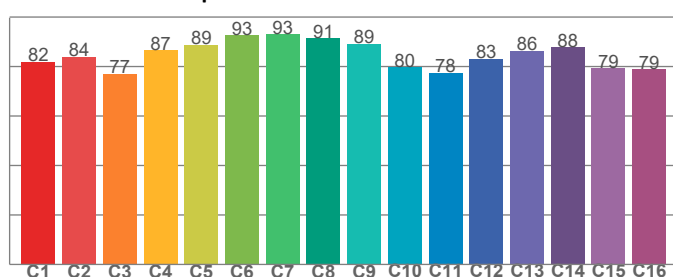

TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
81,9	84,0	77,1	86,7	88,8	92,7	93,2	91,4	89,1	79,8	77,5	83,1	86,3	87,7	79,4	79,0

Color Quality Scale by reference color

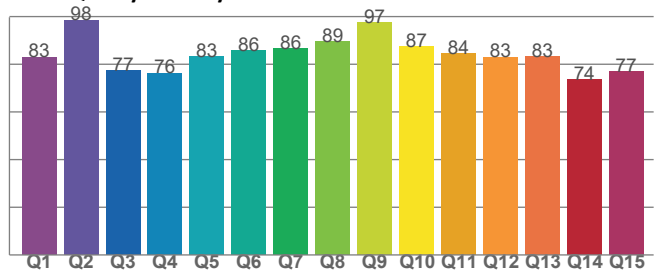

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
82,9	98,4	77,3	76,3	83,1	85,6	86,5	89,5	97,5	87,4	84,3	83,0	83,1	73,5	76,8

Light Measurement Report

Print date: 26-6-2025


Measurement date and time: 26-6-2025 09:26:22 – Measurement no. VFR-250626-1754-MS

Measurement tracking No. and Link: [VT250626-000562](#)

Operator:



Beam Details

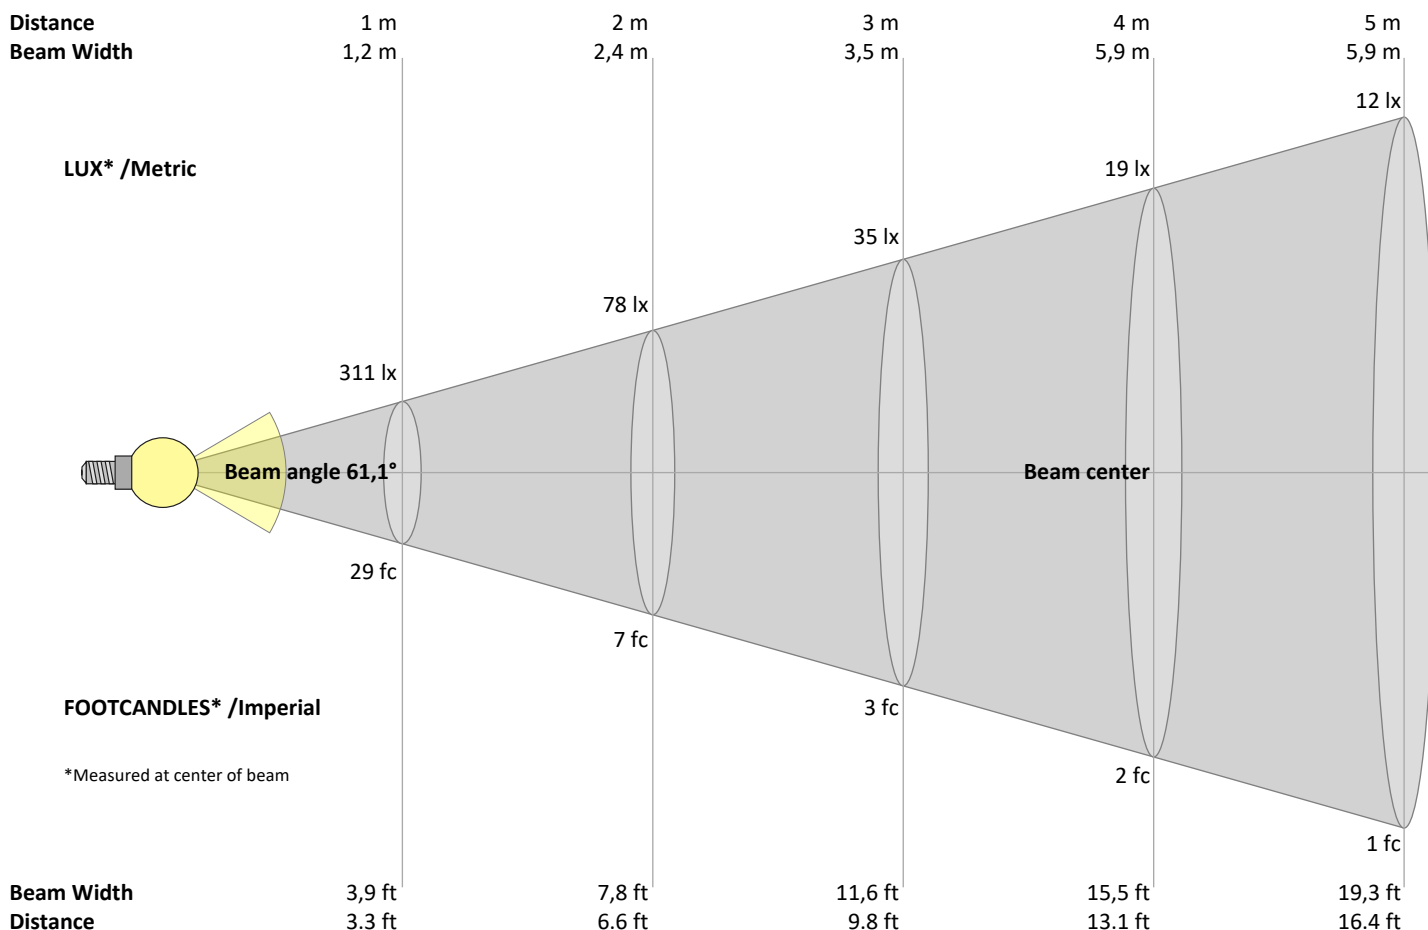

Beam intensities from 1 – 20 m

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	m
3,3	6,6	9,8	13,1	16,4	19,7	23	26,2	29,5	32,8	36,1	39,4	42,7	45,9	49,2	52,5	55,8	59,1	62,3	65,6	ft
311	78	35	19	12	9	6	5	4	3	3	2	2	2	1	1	1	1	1	1	lux
28,9	7,2	3,2	1,8	1,2	0,8	0,6	0,5	0,4	0,3	0,2	0,2	0,2	0,1	0,1	0,1	0,1	0,1	0,1	0,1	fc

Intensities in 0° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°	γ
311	311	315	326	337	343	348	348	341	334	315	295	271	240	209	182	156	133	114	94	cd
100%	100%	101%	105%	108%	110%	112%	112%	110%	107%	101%	95%	87%	77%	67%	59%	50%	43%	37%	30%	of 0°val

Intensities in 90° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°	γ
311	311	315	326	337	343	348	348	341	334	315	295	271	240	209	182	156	133	114	94	cd
100%	100%	101%	105%	108%	110%	112%	112%	110%	107%	101%	95%	87%	77%	67%	59%	50%	43%	37%	30%	of 0°val

Intensities in 180° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°	γ
311	311	315	326	337	343	348	348	341	334	315	295	271	240	209	182	156	133	114	94	cd
100%	100%	101%	105%	108%	110%	112%	112%	110%	107%	101%	95%	87%	77%	67%	59%	50%	43%	37%	30%	of 0°val

Intensities in 270° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°	γ
311	311	315	326	337	343	348	348	341	334	315	295	271	240	209	182	156	133	114	94	cd
100%	100%	101%	105%	108%	110%	112%	112%	110%	107%	101%	95%	87%	77%	67%	59%	50%	43%	37%	30%	of 0°val

Light Measurement Report

Print date: 26-6-2025

Measurement date and time: 26-6-2025 09:26:22 – Measurement no. VFR-250626-1754-MS

Measurement tracking No. and Link: [VT250626-000562](#)

Operator:



Light Planning – UGR table

Uncorrected, comprehensive UGR table according to 117-1995

Reflectances											
	ρ Ceiling	70	70	50	50	30	70	70	50	50	30
	ρ Walls	50	30	50	30	30	50	30	50	30	30
	ρ Floor	20	20	20	20	20	20	20	20	20	20
Room size		Viewed Crosswise					Viewed Endwise				
H = mounting height above eye level		(Viewing direction orthogonal to lamp length axis)					(Viewing direction parallel to lamp length axis)				
X	Y										
2H	2H	21,9	22,7	22,0	22,9	23,1	21,9	22,7	22,0	22,9	23,1
	3H	22,3	23,2	22,7	23,4	23,6	22,3	23,2	22,7	23,4	23,6
	4H	22,5	23,4	22,9	23,6	23,9	22,5	23,4	22,9	23,6	23,9
	6H	22,7	23,5	23,0	23,8	24,1	22,7	23,5	23,0	23,8	24,1
	8H	22,7	23,5	23,1	23,8	24,2	22,7	23,5	23,1	23,8	24,2
	12H	22,7	23,4	23,1	23,8	24,2	22,7	23,4	23,1	23,8	24,2
4H	2H	21,9	22,8	22,3	23,1	23,3	21,9	22,8	22,3	23,1	23,3
	3H	22,7	23,4	23,1	23,8	24,2	22,7	23,4	23,1	23,8	24,2
	4H	23,0	23,6	23,4	24,0	24,6	23,0	23,6	23,4	24,0	24,6
	6H	23,2	23,8	23,7	24,2	24,5	23,2	23,8	23,7	24,2	24,5
	8H	23,2	23,8	23,8	24,2	24,6	23,2	23,8	23,8	24,2	24,6
	12H	23,3	23,7	23,8	24,1	24,6	23,3	23,7	23,8	24,1	24,6
8H	4H	23,0	23,6	23,6	24,0	24,4	23,0	23,6	23,6	24,0	24,4
	6H	23,4	23,8	23,9	24,2	24,8	23,4	23,8	23,9	24,2	24,8
	8H	23,5	23,9	24,0	24,4	25,0	23,5	23,9	24,0	24,4	25,0
	12H	23,6	23,8	24,1	24,4	25,0	23,6	23,8	24,1	24,4	25,0
12H	4H	23,0	23,5	23,5	23,9	24,4	23,0	23,5	23,5	23,9	24,4
	6H	23,4	23,8	23,9	24,3	24,9	23,4	23,8	23,9	24,3	24,9
	8H	23,5	23,8	24,1	24,3	24,9	23,5	23,8	24,1	24,3	24,9
Variations with the observer position for the luminaire spacings, S:											
S = 1.0H		1,3 / -1,0					1,3 / -1,0				
S = 1.5H		2,8 / -1,4					2,8 / -1,4				
S = 2.0H		4,2 / -1,9					4,2 / -1,9				

Coefficients of Utilization

Ceiling reflectance	80			70			50			30			10			0		
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR		(RCR: Room Cavity Ratio)			Room Values are expressed as percentage of Lumen delivered to the task surface													
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	109	106	103	110	107	104	102	103	100	98	99	97	95	95	94	93	91
2	105	100	95	91	103	98	93	90	95	91	88	91	88	86	89	86	84	82
3	99	92	86	81	97	90	85	80	87	83	79	85	81	78	82	79	76	75
4	93	84	78	73	91	83	77	73	81	76	72	79	74	71	77	73	70	68
5	88	78	72	67	86	77	71	66	75	70	66	74	69	65	72	68	64	63
6	83	73	66	61	81	72	65	61	70	65	60	69	64	60	67	63	59	58
7	78	68	61	56	77	67	61	56	66	60	56	64	59	56	63	59	55	54
8	74	63	57	52	73	63	57	52	62	56	52	61	55	52	60	55	51	50
9	70	60	53	49	69	59	53	49	58	52	48	57	52	48	56	51	48	46
10	67	56	50	45	66	56	49	45	55	49	45	54	49	45	53	48	45	43

Light Measurement Report


Print date: 26-6-2025
Measurement date and time: 26-6-2025 09:26:22 – Measurement no. VFR-250626-1754-MS
Measurement tracking No. and Link: [VT250626-000562](#)
Operator:



Luminaire budgetary diagram

Uncorrected, comprehensive UGR table according to 117-1995

LAMPS (number of lamps)

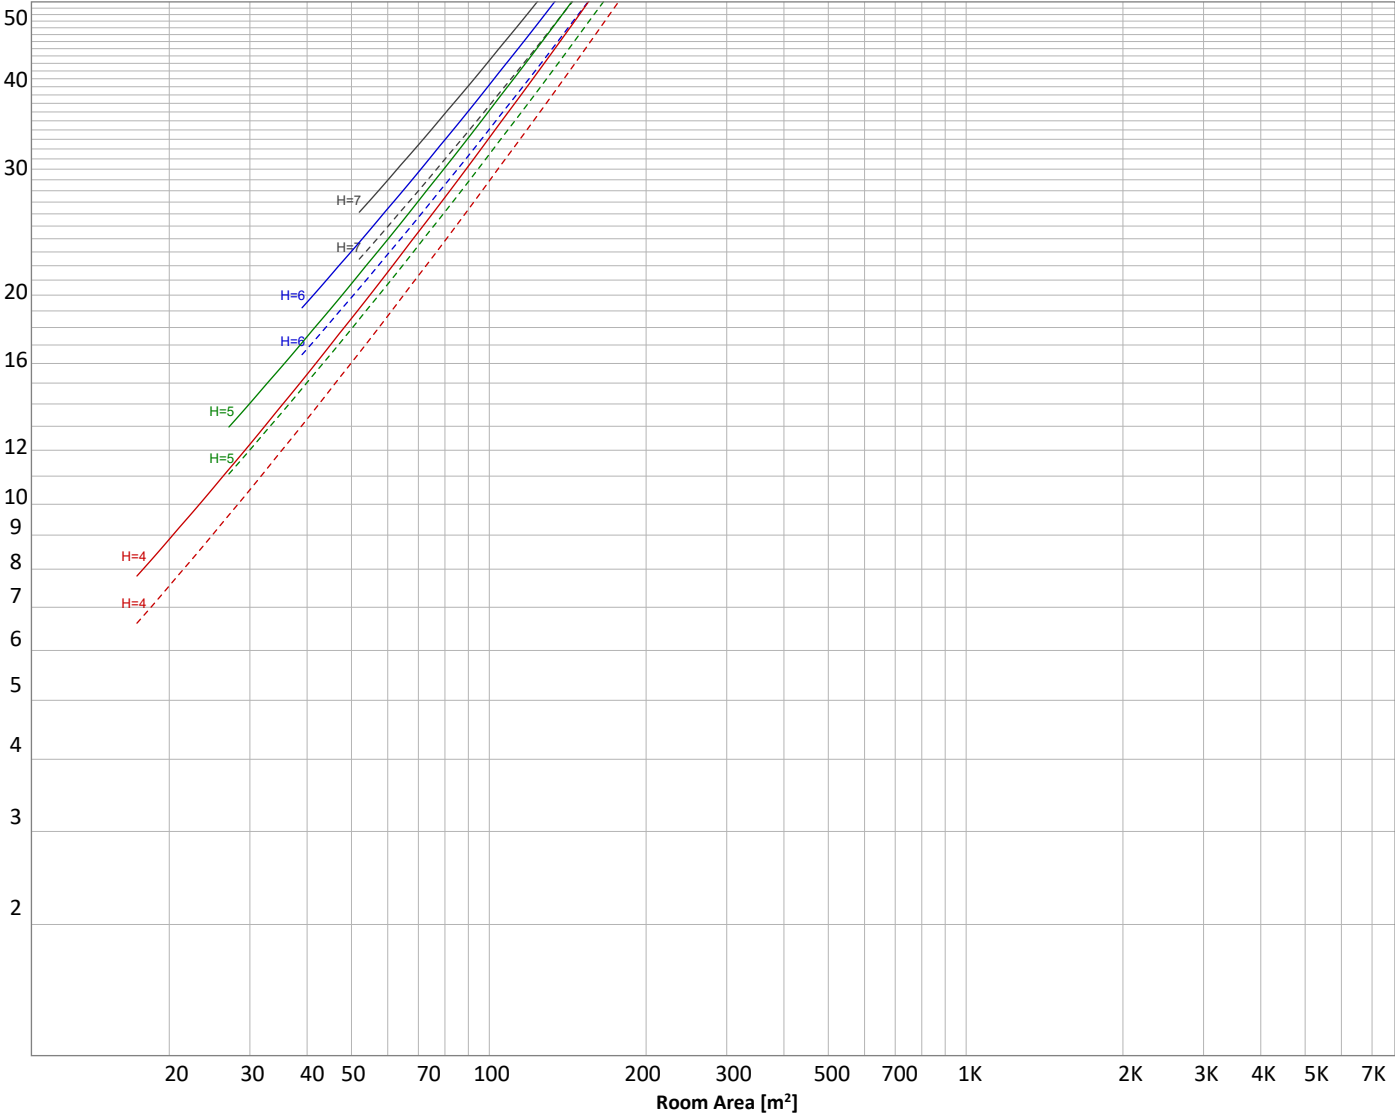

Conditions

H = Room height	Flux = 405 lm	p(%)		
H _{down} = Lamp distance from ceiling =	0.00 m	Line type	Ceiling reflectance	Wall reflectance
H _{work} = Work area height from floor =	0.00 m	-----	70	50
E _{work} = Average lux on work area =	100 lx	-----	50	30
				Floor reflectance
				20

Zonal Lumen Summary

0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
31,4 lm	96,8 lm	115 lm	77,0 lm	37,4 lm	22,2 lm	14,4 lm	7,57 lm	2,15 lm
90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
0,111 lm	0,050 lm	0,049 lm	0,061 lm	0,069 lm	0,058 lm	0,070 lm	0,041 lm	0,013 lm

Light Measurement Report

Print date: 26-6-2025

Measurement date and time: 26-6-2025 09:26:22 – Measurement no. VFR-250626-1754-MS

Measurement tracking No. and Link: [VT250626-000562](#)

Operator:



Outdoor Light Planning

Lumen per Zone

Zone (γ)	Lumen	% Total
0-10°	31 lm	7,8%
10-20°	97 lm	23,9%
20-30°	115 lm	28,5%
30-40°	77 lm	19,0%
40-50°	37 lm	9,2%
50-60°	22 lm	5,5%
60-70°	14 lm	3,6%
70-80°	8 lm	1,9%
80-90°	2 lm	0,5%
90-100°	0 lm	0,0%
100-110°	0 lm	0,0%
110-120°	0 lm	0,0%
120-130°	0 lm	0,0%
130-140°	0 lm	0,0%
140-150°	0 lm	0,0%
150-160°	0 lm	0,0%
160-170°	0 lm	0,0%
170-180°	0 lm	0,0%
Total	405 lm	100,0%

Intensity peaks

Max intensity	351 cd
Intensity, 90°	0 cd
Intensity, 0°	311 cd

Zonal Lumen summary


Zone (γ)	Lumen	% Total
0-30°	243 lm	60,2%
0-40°	320 lm	79,2%
0-60°	380 lm	93,9%
60-90°	24 lm	6,0%
70-100°	10 lm	2,4%
90-120°	0 lm	0,1%
0-90°	404 lm	99,9%
90-180°	1 lm	0,1%
0-180°	405 lm	100,0%

BUG rating

	Lumen	% Total
Forward light		
Low(0-30°)	121 lm	29,9%
Medium(30-60°)	69 lm	17,0%
High(60-80°)	11 lm	2,7%
Very high(80-90°)	1 lm	0,3%
Back light		
Low(0-30°)	121 lm	29,9%
Medium(30-60°)	69 lm	17,0%
High(60-80°)	11 lm	2,7%
Very high(80-90°)	1 lm	0,3%
Uplight		
Low(90-100°)	0 lm	0,0%
High(100-180°)	0 lm	0,1%

IESNA TM-15-07 Luminaire Classification System For Outdoor Luminaires

BUG rating B1 U0 G0

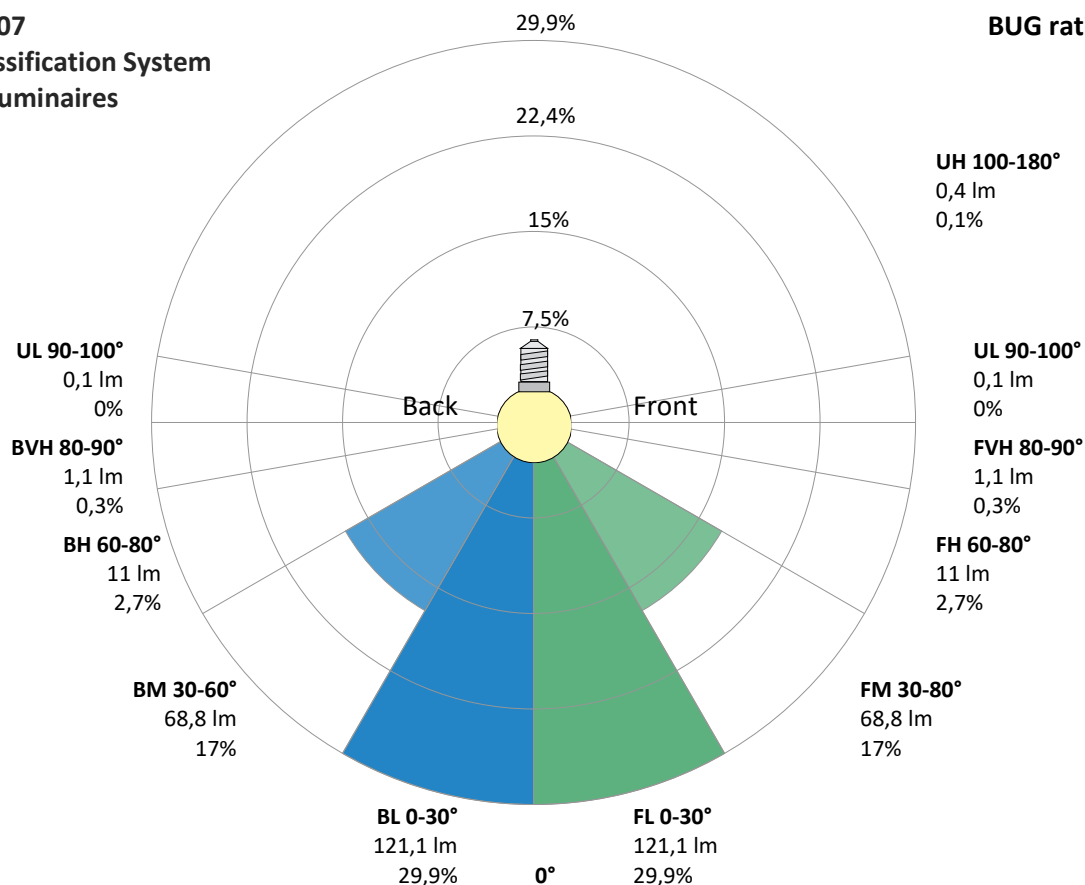

Light Measurement Report

Print date: 26-6-2025
Measurement date and time: 26-6-2025 09:26:22 – Measurement no. VFR-250626-1754-MS
Measurement tracking No. and Link: [VT250626-000562](#)
Operator:




Power Details


Input Power

Power feed to light source	4,8 W
Frequency of input power	50 Hz
RMS Input voltage feed, V_{RMS}	230 V
RMS Input current feed, I_{RMS}	0,052 A
Volt-Ampere or apparent power = $V_{RMS} * I_{RMS}$	11,89 VA
Displacement factor of AC power feed	0,98
Power factor of AC current feed	0,4
Total harmonic distortion of the current	219,45%
Total harmonic distortion of the voltage	0,09%

Input Power Curve

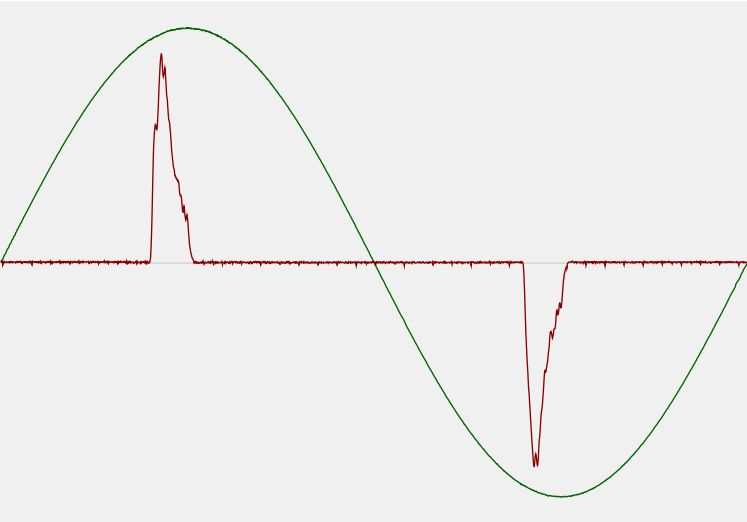

Efficiency

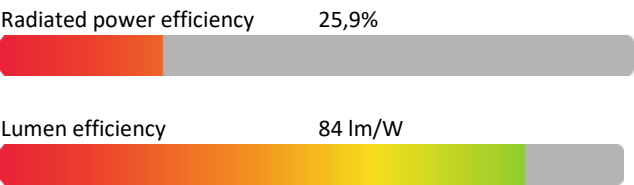

Stabilization Details

Warmup Conditions

Stable period	15 min
Stable change max	2,0%
Minimum time	15 min

Color Temperature Change

CCT start	4000 K
CCT shift	+0 K
CCT end	4000 K


Warmup Result

Total warmup time	Lamp stabilized in 15 min 3 sec
Warmup variation	+0,3%

Output Change

Output start	404 lm
Output change	+1 lm
Output end	405 lm

Stabilization Curve

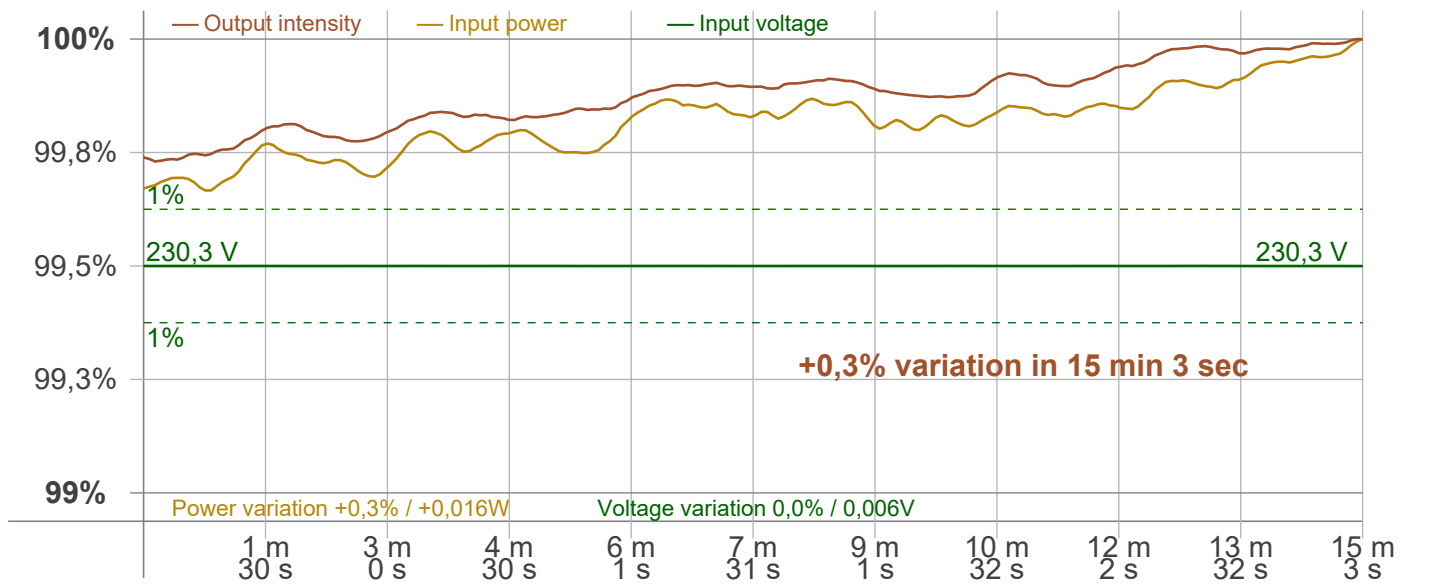

Light Measurement Report


Print date: 26-6-2025
Measurement date and time: 26-6-2025 09:26:22 – Measurement no. VFR-250626-1754-MS
Measurement tracking No. and Link: [VT250626-000562](#)
Operator:



Flicker /TLA details

Flicker Meter Type	Viso Systems LabFlicker	Measurement time	
Frequency of input power	50 Hz	PstLM	180 sec
Flicker/TLA sample rate	20000 samples/s	All other indices	1,2 sec
Flicker indices according to Illuminating Engineering Society (IES)		Flicker indices according to California Energy Commission (CEC) 2016b	
Flicker frequency	4000 Hz	JA8/10 40 Hz	0,12 %
Percent Flicker	2,22 %	JA8/10 90 Hz	0,14 %
Flicker index	0,01	JA8/10 200 Hz	0,22 %
TLA indices (re IEC TR 61547-1, IEC 61000-3-3 and IEC 61000-4-15)		JA8/10 400 Hz	0,29 %
PstLM value (F < 80 Hz)	0,08	JA8/10 1000 Hz	0,36 %
SVM value (80 < F < 2000 Hz)	0	Flicker indices according to Lighting Research Center (2015)	
		Perception metric, Assist Mp	0,05

Flicker frame (frame of one flicker period in time domain)

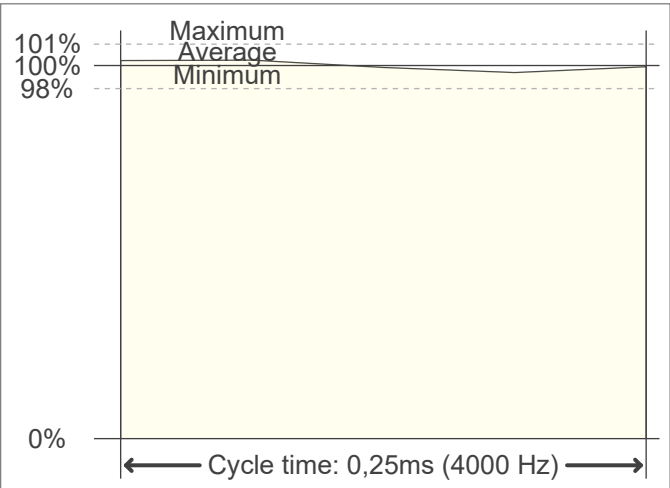

Flicker FFT (flicker curve in frequency domain)



IEEE 1789 Frequency/modulation plot

