

# Light Measurement Report

Print date: 13-8-2025

Measurement date and time: 13-8-2025 16:06:42 – Measurement no. VFR-250813-2531-MS

Measurement tracking No. and Link: [VT250813-002853](#)

Operator:



## Laboratory and Equipment

Laboratory Owner and Location  
Goniospectrometer System and Type  
Sensor Name, Calibr. Date and Serial No.  
Spectrometer Manufacturer and Model

Viso Systems, Copenhagen V, Denmark  
LabSpion – Type C, horizontal  
LabSensor Model2 – 11-1-2024 – 3130191315  
Ibsen Photonics, Denmark – Freedom VIS (Custom Viso)

## Measurement Conditions

Number of C-planes and Resolution  
 $\gamma$  (gamma)-Resolution  
Test Distance  
Input Power, Power and Displ. Factors  
Input RMS Voltage and Current  
Frequency of Input Power  
Warm-up Time and Variation

40 planes – 9°  
5°  
1,99 m  
11,8 W – PF 0,93 – DPF 0,94  
230 V – 0,055 A  
50 Hz  
Lamp stabilized in 15 min 3 sec – 2,0%

## Tested Light Source



Product Name  
Item No. and Manufacturer  
Product Description (line 1)  
ZWART | CCT SWITCH

812959-3000K-12W  
812959-3000K-12W – Dutchfulfillment  
3-FASE RAILARMATUUR | TARVOS | 60CM | 12W/16W/20W/24W |

## Main Light Measurement Results

Output – Total Lumen (Up% / Down%)  
Efficiency  
Peak Intensity and Beam Angle  
Correlated Color Temperature, Target/Measured  
Color Rendering Index  
Color Rendering TM30-18  
Color Shift, CIE duv and MacAdam Steps  
Flicker

1256 lm – 3,83% / 96,17%  
106 lm/W  
474 cd – 100,2°  
CCT = 3000 K / 3003 K  
CRI 81,7  
 $R_f$  83,1 –  $R_g$  97,7  
Duv 0,0040 – SDCM 4,1  
SVM 0,01 – PstLM 0,01

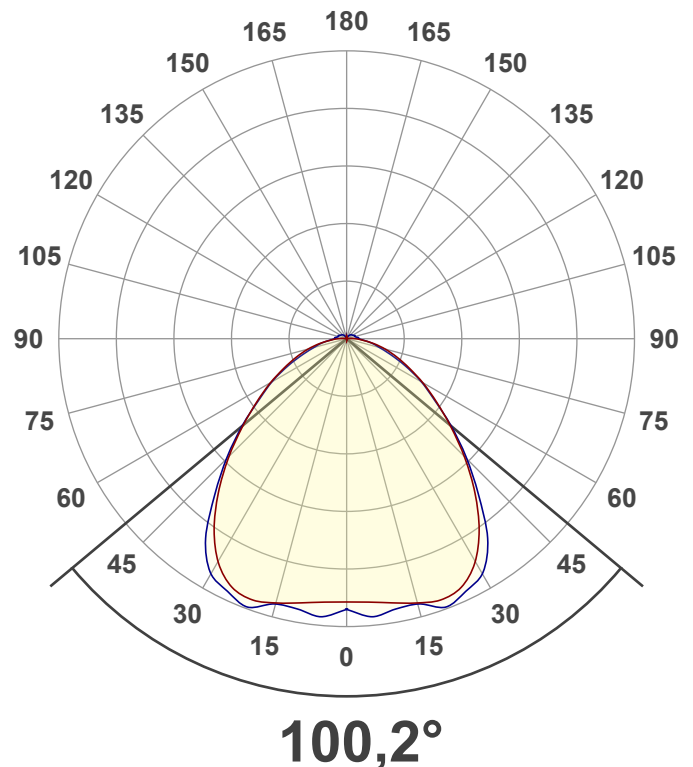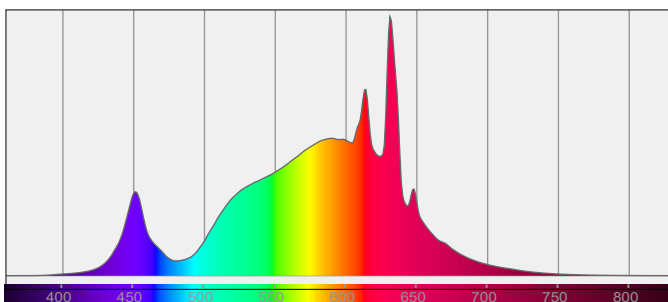

# Light Measurement Report

Print date: 13-8-2025

Measurement date and time: 13-8-2025 16:06:42 – Measurement no. VFR-250813-2531-MS


Measurement tracking No. and Link: [VT250813-002853](#)

Operator:



## Luminous Intensity diagram

Unit: 0-100% of peak intensity

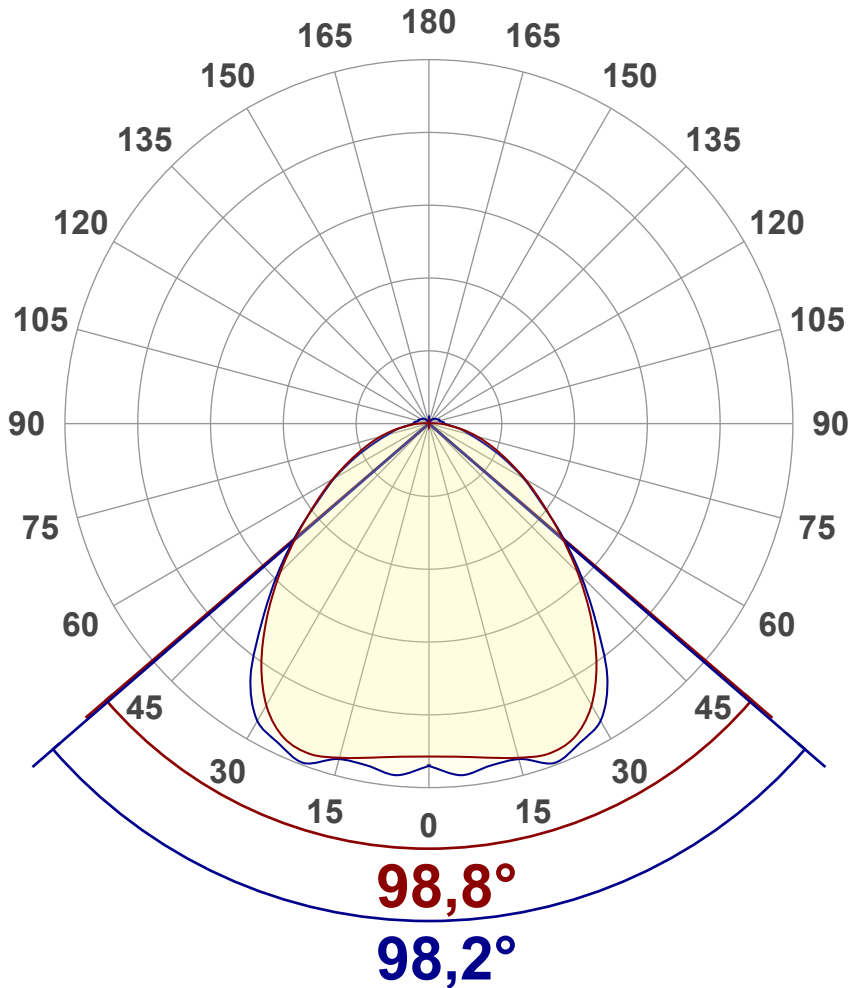

## Main Values

Output (total Lumen)	1256 lm
Lumen Up% / Down%	3,83% / 96,17%
Peak Intensity	474 cd
Beam Angle (50%)	100,2°
Beam Angle (90%)	98,2°
Beam Angle (10%)	99,6°

## Cut-off Angle

Average 2,5%	213°
--------------	------

## Field Angle

Average 10%	157,8°
-------------	--------


## Intensity Ratio

In 120° cone	79,5%
In 90° cone	57,9%

**C000-C180**

**C090-C270**

## Linear distribution diagram - Intensity (candela) vs $\gamma$ -angle

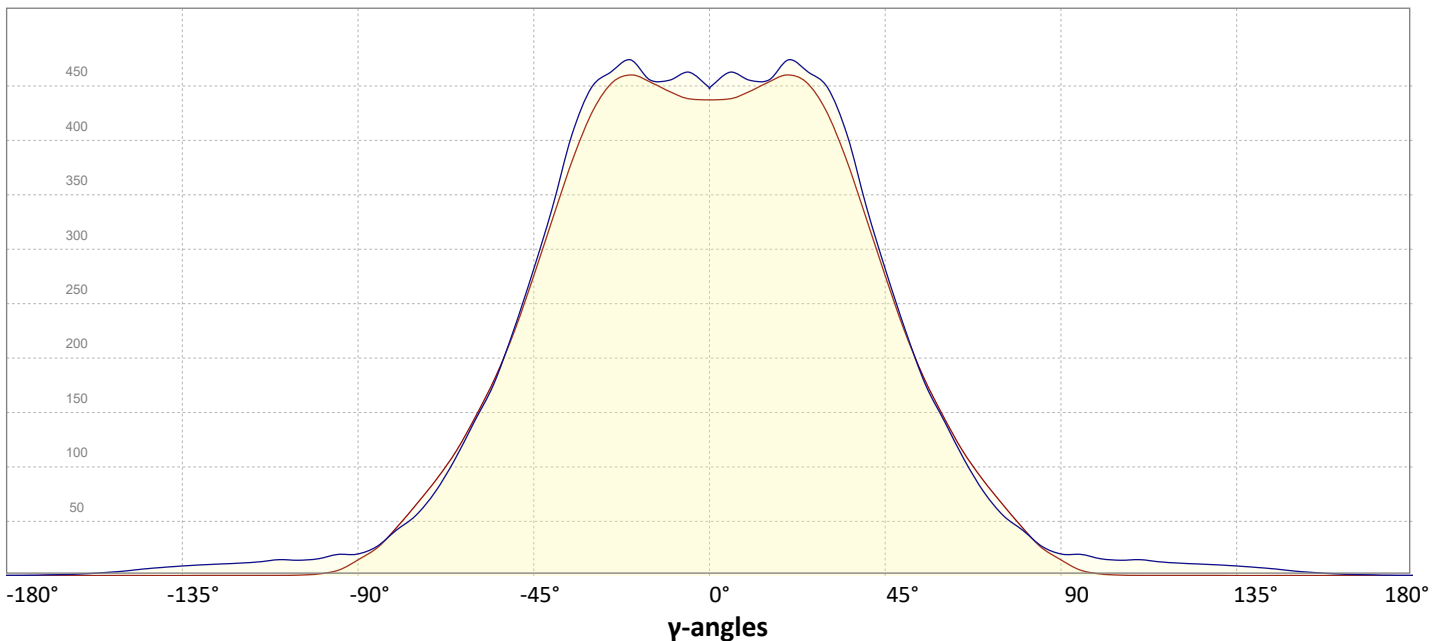

# Light Measurement Report

Print date: 13-8-2025


Measurement date and time: 13-8-2025 16:06:42 – Measurement no. VFR-250813-2531-MS

Measurement tracking No. and Link: [VT250813-002853](#)

Operator:



## Iso-intensity Diagram (Iso-candela)

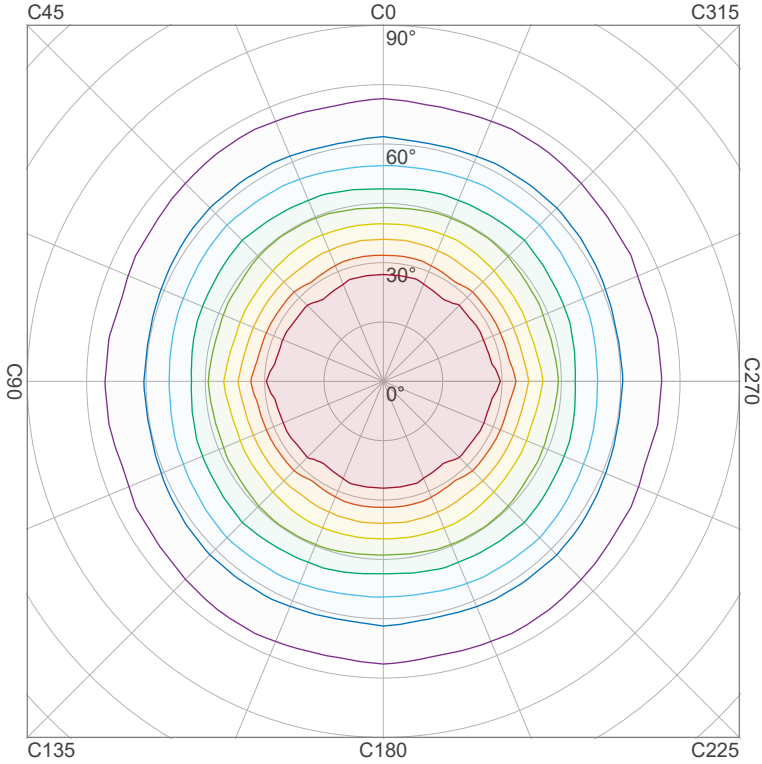


90 %	425,7 cd
80 %	378,4 cd
70 %	331,1 cd
60 %	283,8 cd
50 %	236,5 cd
40 %	189,2 cd
30 %	141,9 cd
20 %	94,6 cd
10 %	47,3 cd

Peak intensity: 473,0 cd

Number of c-planes: 40

## Iso-illuminance Diagram (Iso-lux)

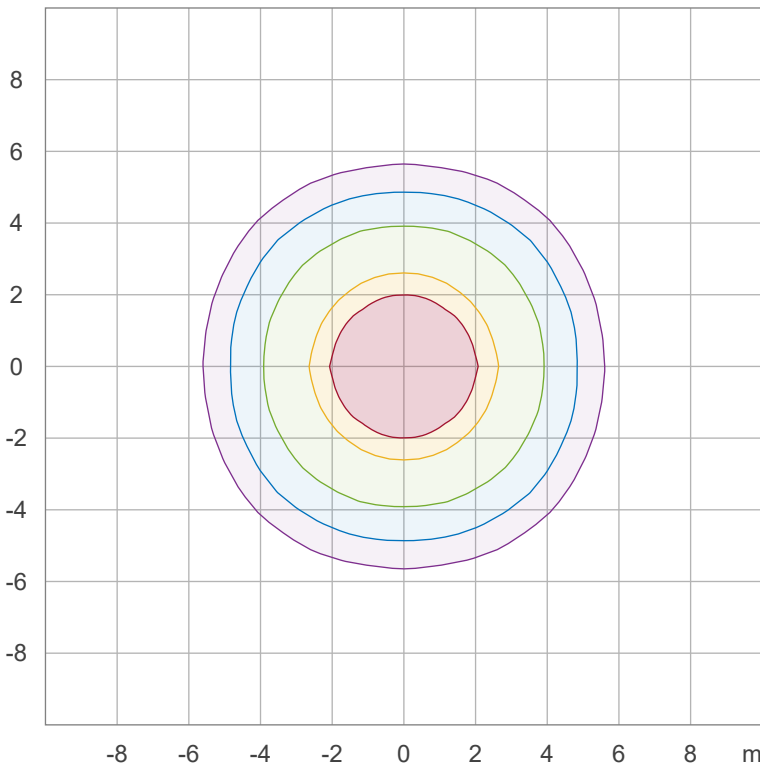

50,0 %	25,4 lx
30,0 %	15,2 lx
10,0 %	5,1 lx
5,0 %	2,5 lx
3,0 %	1,5 lx

Peak illuminance: 50,7 lx

Mounting height: 3,0 m

Number of c-planes: 40

# Light Measurement Report

Print date: 13-8-2025

Measurement date and time: 13-8-2025 16:06:42 – Measurement no. VFR-250813-2531-MS

Measurement tracking No. and Link: [VT250813-002853](https://www.viso-systems.com/VT250813-002853)

Operator:



## Color details

Correlated Color Temperature, Target CCT = 3000 K  
 Correlated Color Temperature, Measured CCT = 3003 K  
 Color Rendering Index CRI 81,7  
 Color Rendering Index, R9 (red component) R9 = 17,0  
 Color Rendering TM30-18 R<sub>f</sub> 83,1 – R<sub>g</sub> 97,7  
 Color Quality Scale CQS = 81,4

MacAdam Steps  
 Color coordinates CIE 1931 (x;y) = (0,437;0,404)  
 Color coordinate CIEs 1960 (u;v) = (0,251;0,348)  
 Color deviation from BBL Duv = 0,0040  
 Color coordinate CIEs 1976 (CIELUV) (u';v') = (0,251;0,521)


### CIE 1931



### CIE 1931 – zoomed on Planckian locus




### Color Rendering Index per reference color (CIE 1995)

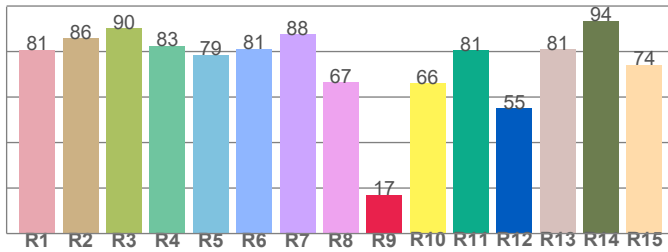


CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
80,7	85,9	90,3	82,6	78,7	81,3	87,7	66,5	17,0	65,9	80,6	55,0	81,1	93,5	74,2

### Spectral power distribution (SPD) / W/nm – 0-100%

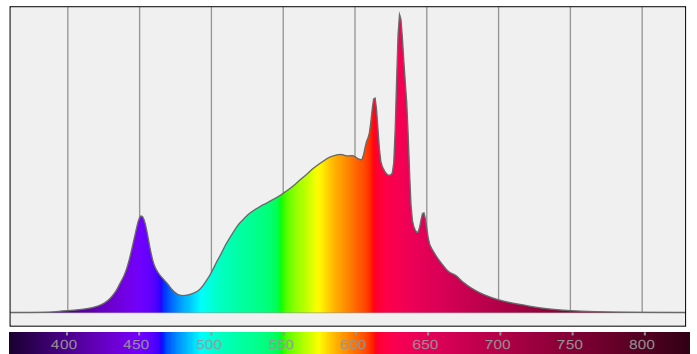


### TM30-18 R<sub>f</sub>-values per hue bin

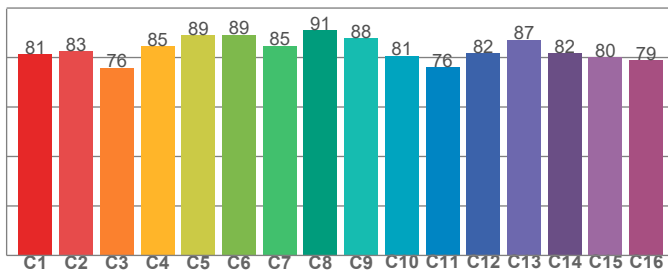

TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
81,2	82,5	75,9	84,5	89,0	89,2	84,8	91,0	87,7	80,8	76,0	81,7	87,2	81,7	80,1	78,8

### Color Quality Scale by reference color

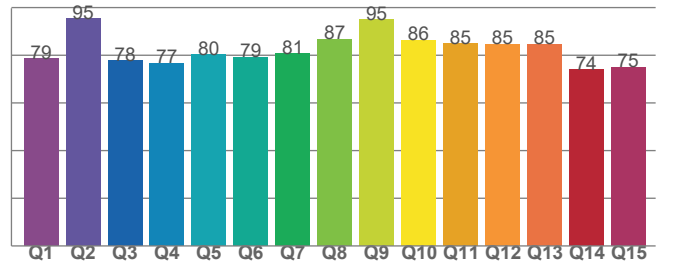

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
78,5	95,3	77,8	76,6	80,2	79,1	80,6	86,7	94,9	86,4	84,8	84,6	84,7	73,9	75,1

# Light Measurement Report

Print date: 13-8-2025


Measurement date and time: 13-8-2025 16:06:42 – Measurement no. VFR-250813-2531-MS

Measurement tracking No. and Link: [VT250813-002853](https://www.viso-systems.com/VT250813-002853)

Operator:



## Beam Details

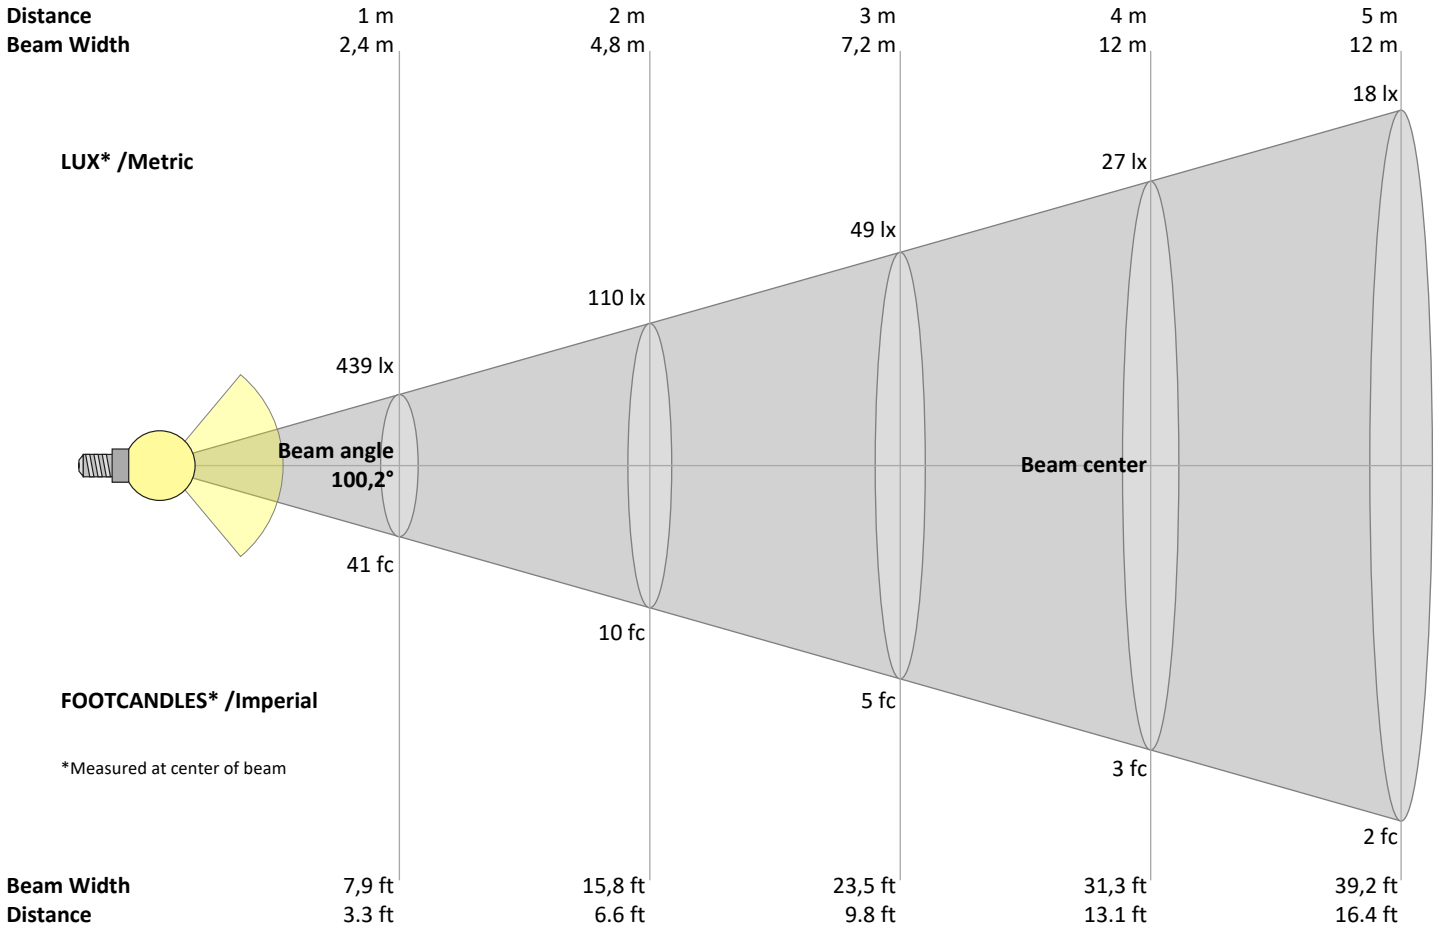

### Beam intensities from 1 – 20 m

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	m
3,3	6,6	9,8	13,1	16,4	19,7	23	26,2	29,5	32,8	36,1	39,4	42,7	45,9	49,2	52,5	55,8	59,1	62,3	65,6	ft
439	110	49	27	18	12	9	7	5	4	4	3	3	2	2	2	2	1	1	1	lux
40,8	10,2	4,5	2,6	1,6	1,1	0,8	0,6	0,5	0,4	0,3	0,3	0,2	0,2	0,2	0,2	0,1	0,1	0,1	0,1	fc

### Intensities in 0° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°	γ
439	438	445	453	460	452	426	383	330	276	224	181	146	114	88	66	45	26	15	5	cd
100%	100%	101%	103%	105%	103%	97%	87%	75%	63%	51%	41%	33%	26%	20%	15%	10%	6%	3%	1%	of 0°val

### Intensities in 90° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°	γ
439	462	456	456	473	463	449	407	341	282	227	178	143	108	78	56	42	27	20	20	cd
100%	105%	104%	104%	108%	105%	102%	93%	78%	64%	52%	41%	33%	25%	18%	13%	10%	6%	5%	4%	of 0°val

### Intensities in 180° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°	γ
439	438	445	453	460	452	426	383	330	276	224	181	146	114	88	66	45	26	15	5	cd
100%	100%	101%	103%	105%	103%	97%	87%	75%	63%	51%	41%	33%	26%	20%	15%	10%	6%	3%	1%	of 0°val

### Intensities in 270° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°	γ
439	462	456	456	473	463	449	407	341	282	227	178	143	108	78	56	42	27	20	20	cd
100%	105%	104%	104%	108%	105%	102%	93%	78%	64%	52%	41%	33%	25%	18%	13%	10%	6%	5%	4%	of 0°val

# Light Measurement Report

Print date: 13-8-2025

Measurement date and time: 13-8-2025 16:06:42 – Measurement no. VFR-250813-2531-MS

Measurement tracking No. and Link: [VT250813-002853](#)

Operator:



## Light Planning – UGR table

Uncorrected, comprehensive UGR table according to 117-1995

Reflectances		70	70	50	50	30	70	70	50	50	30
	ρ Ceiling	70	70	50	50	30	70	70	50	50	30
	ρ Walls	50	30	50	30	30	50	30	50	30	30
	ρ Floor	20	20	20	20	20	20	20	20	20	20
Room size		Viewed Crosswise					Viewed Endwise				
H = mounting height above eye level		(Viewing direction orthogonal to lamp length axis)					(Viewing direction parallel to lamp length axis)				
X	Y										
2H	2H	20,7	21,9	21,0	22,2	22,5	21,0	22,1	21,2	22,4	22,7
	3H	21,7	22,8	22,1	23,2	23,4	21,9	23,1	22,4	23,4	23,7
	4H	22,1	23,2	22,6	23,6	23,9	22,4	23,5	22,8	23,8	24,1
	6H	22,6	23,5	22,9	23,9	24,3	22,9	23,8	23,3	24,2	24,6
	8H	22,7	23,6	23,1	24,0	24,5	23,1	24,1	23,5	24,4	24,9
	12H	22,8	23,7	23,2	24,1	24,6	23,3	24,3	23,8	24,6	25,2
4H	2H	21,2	22,3	21,7	22,6	23,0	21,4	22,5	21,8	22,8	23,1
	3H	22,5	23,4	22,9	23,8	24,3	22,6	23,6	23,1	24,0	24,5
	4H	23,0	23,9	23,5	24,3	24,9	23,1	24,0	23,6	24,4	25,0
	6H	23,4	24,3	24,0	24,7	25,1	23,7	24,5	24,3	24,9	25,4
	8H	23,6	24,4	24,2	24,8	25,3	24,0	24,7	24,6	25,2	25,6
	12H	23,8	24,4	24,3	24,9	25,4	24,3	24,9	24,9	25,4	25,9
8H	4H	23,2	23,9	23,8	24,4	24,8	23,3	24,1	23,9	24,5	25,0
	6H	23,9	24,4	24,4	24,9	25,5	24,1	24,6	24,6	25,2	25,8
	8H	24,2	24,6	24,7	25,2	25,9	24,5	25,0	25,1	25,6	26,2
	12H	24,4	24,8	25,0	25,4	26,0	24,9	25,4	25,6	25,9	26,6
12H	4H	23,2	23,8	23,8	24,3	24,8	23,3	24,0	23,9	24,4	25,0
	6H	23,9	24,4	24,5	25,0	25,7	24,2	24,6	24,7	25,2	25,9
	8H	24,3	24,7	24,9	25,2	25,9	24,6	25,0	25,2	25,6	26,2

### Variations with the observer position for the luminaire spacings, S:

S = 1.0H	0,1 / -0,2	0,1 / -0,1
S = 1.5H	0,2 / -0,4	0,2 / -0,3
S = 2.0H	0,6 / -0,8	0,5 / -0,7

## Coefficients of Utilization

Ceiling reflectance	80			70			50			30			10			0		
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio)																	
	Room Values are expressed as percentage of Lumen delivered to the task surface																	
0	118	118	118	118	115	115	115	115	109	109	109	104	104	104	99	99	99	96
1	108	104	100	96	105	101	97	94	96	93	90	92	89	87	87	85	84	81
2	99	91	85	79	96	89	83	78	85	80	76	81	77	73	78	74	71	69
3	91	81	73	67	88	79	72	66	75	69	64	72	67	63	69	65	61	59
4	83	72	64	57	81	70	63	57	68	61	55	65	59	54	62	57	53	51
5	77	65	56	50	75	63	55	49	61	54	48	59	52	48	56	51	47	45
6	71	58	50	44	69	57	49	43	55	48	43	53	47	42	51	46	41	39
7	66	53	45	39	64	52	44	39	50	43	38	49	42	37	47	41	37	35
8	62	49	40	35	60	48	40	35	46	39	34	45	38	34	43	38	33	31
9	58	45	37	31	56	44	36	31	43	36	31	41	35	30	40	34	30	28
10	54	41	34	28	53	41	33	28	39	33	28	38	32	28	37	32	27	26

# Light Measurement Report

Print date: 13-8-2025

Measurement date and time: 13-8-2025 16:06:42 – Measurement no. VFR-250813-2531-MS

Measurement tracking No. and Link: [VT250813-002853](#)


Operator:



## Luminaire budgetary diagram

Uncorrected, comprehensive UGR table according to 117-1995

LAMPS (number of lamps)

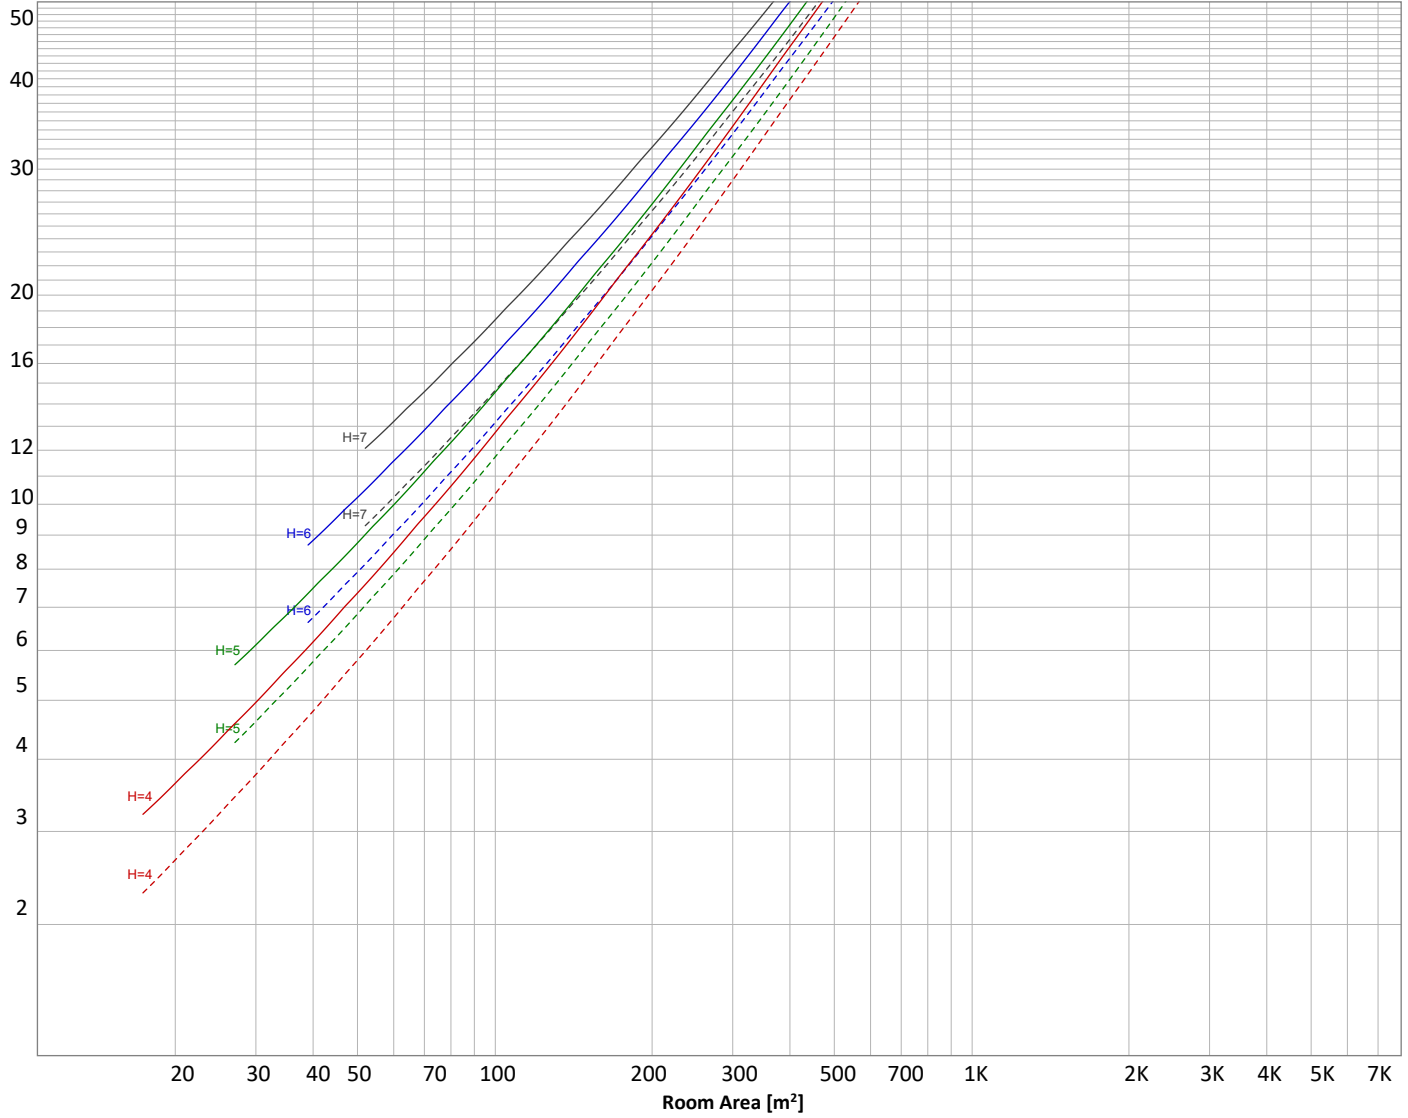

### Conditions

H = Room height	Flux = 1256 lm				
H <sub>down</sub> = Lamp distance from ceiling =	0.00 m	Line type	Ceiling reflectance	ρ(%) Wall reflectance	Floor reflectance
H <sub>work</sub> = Work area height from floor =	0.00 m	-----	70	50	30
E <sub>work</sub> = Average lux on work area =	100 lx	_____	50	30	20

### Zonal Lumen Summary

0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
42,3 lm	128 lm	207 lm	239 lm	212 lm	169 lm	114 lm	64,6 lm	31,4 lm
90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
15,2 lm	11,5 lm	8,51 lm	6,11 lm	3,92 lm	1,93 lm	0,726 lm	0,212 lm	0,035 lm

# Light Measurement Report

Print date: 13-8-2025

Measurement date and time: 13-8-2025 16:06:42 – Measurement no. VFR-250813-2531-MS

Measurement tracking No. and Link: [VT250813-002853](#)

Operator:



## Outdoor Light Planning

### Lumen per Zone

Zone (γ)	Lumen	% Total
0-10°	42 lm	3,4%
10-20°	128 lm	10,2%
20-30°	207 lm	16,5%
30-40°	239 lm	19,0%
40-50°	212 lm	16,9%
50-60°	169 lm	13,5%
60-70°	114 lm	9,1%
70-80°	65 lm	5,1%
80-90°	31 lm	2,5%
90-100°	15 lm	1,2%
100-110°	12 lm	0,9%
110-120°	9 lm	0,7%
120-130°	6 lm	0,5%
130-140°	4 lm	0,3%
140-150°	2 lm	0,2%
150-160°	1 lm	0,1%
160-170°	0 lm	0,0%
170-180°	0 lm	0,0%
<b>Total</b>	<b>1256 lm</b>	<b>100,0%</b>

### Intensity peaks

Max intensity	474 cd
Intensity, 90°	15 cd
Intensity, 0°	439 cd

### Zonal Lumen summary


Zone (γ)	Lumen	% Total
0-30°	378 lm	30,1%
0-40°	617 lm	49,1%
0-60°	998 lm	79,5%
60-90°	210 lm	16,7%
70-100°	111 lm	8,9%
90-120°	35 lm	2,8%
0-90°	1208 lm	96,2%
90-180°	48 lm	3,8%
0-180°	1256 lm	100,0%

### BUG rating

	Lumen	% Total
<b>Forward light</b>		
Low(0-30°)	188 lm	15,0%
Medium(30-60°)	310 lm	24,7%
High(60-80°)	90 lm	7,1%
Very high(80-90°)	16 lm	1,3%
<b>Back light</b>		
Low(0-30°)	188 lm	15,0%
Medium(30-60°)	310 lm	24,7%
High(60-80°)	90 lm	7,1%
Very high(80-90°)	16 lm	1,3%
<b>Uplight</b>		
Low(90-100°)	15 lm	1,2%
High(100-180°)	33 lm	2,6%

## IESNA TM-15-07 Luminaire Classification System For Outdoor Luminaires

**BUG rating B1 U2 G1**

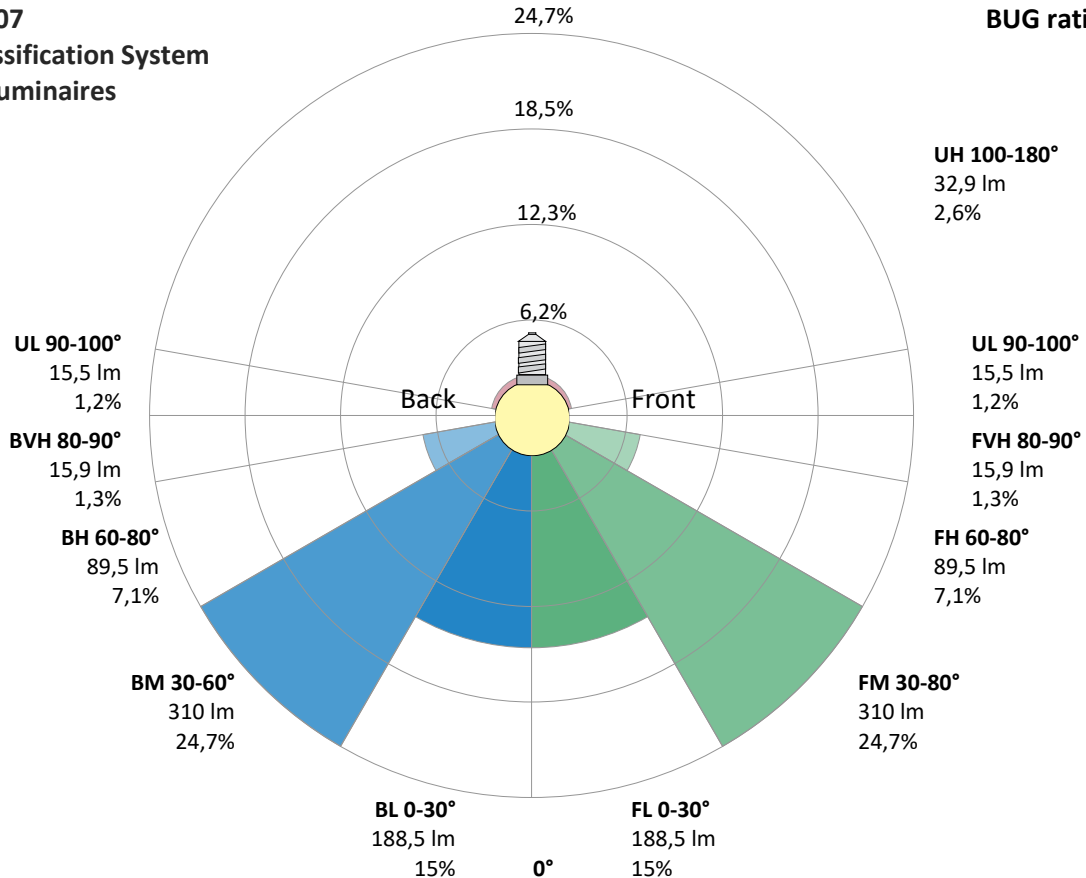

# Light Measurement Report

Print date: 13-8-2025

Measurement date and time: 13-8-2025 16:06:42 – Measurement no. VFR-250813-2531-MS

Measurement tracking No. and Link: [VT250813-002853](#)

Operator:




## Power Details


### Input Power

Power feed to light source	11,8 W
Frequency of input power	50 Hz
RMS Input voltage feed, $V_{RMS}$	230 V
RMS Input current feed, $I_{RMS}$	0,055 A
Volt-Ampere or apparent power = $V_{RMS} * I_{RMS}$	12,71 VA
Displacement factor of AC power feed	0,94
Power factor of AC current feed	0,93
Total harmonic distortion of the current	15,32%
Total harmonic distortion of the voltage	0,06%

### Input Power Curve

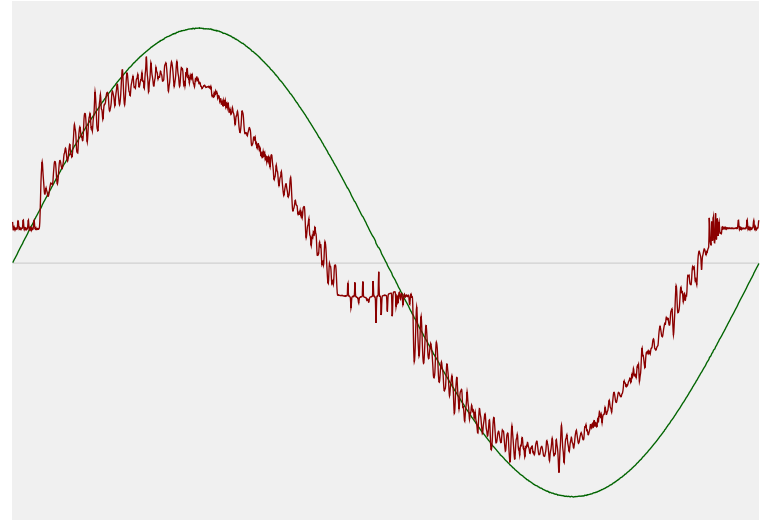

### Efficiency

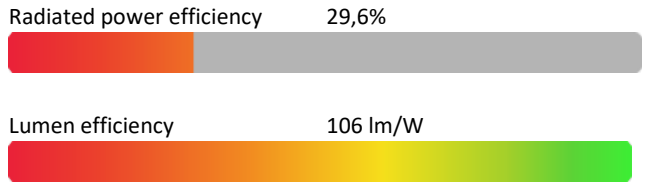

## Stabilization Details

### Warmup Conditions

Stable period	15 min
Stable change max	2,0%
Minimum time	15 min

### Color Temperature Change

CCT start	3002 K
CCT shift	-2 K
CCT end	3000 K


### Warmup Result

Total warmup time	Lamp stabilized in 15 min 3 sec
Warmup variation	-0,1%

### Output Change

Output start	1257 lm
Output change	-1 lm
Output end	1256 lm

### Stabilization Curve

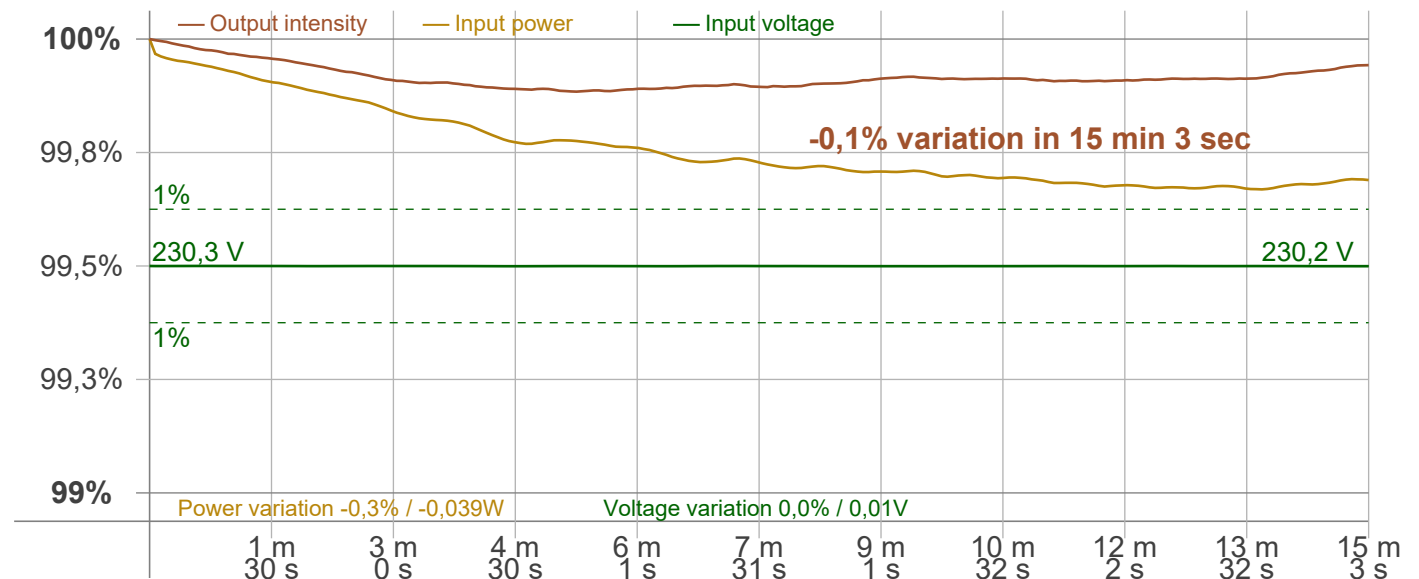

# Light Measurement Report

Print date: 13-8-2025

Measurement date and time: 13-8-2025 16:06:42 – Measurement no. VFR-250813-2531-MS

Measurement tracking No. and Link: [VT250813-002853](#)

Operator:



## Flicker /TLA details

Flicker Meter Type: Viso Systems LabFlicker  
 Frequency of input power: 50 Hz  
 Flicker/TLA sample rate: 20000 samples/s

**Measurement time**  
 PstLM: 180 sec  
 All other indices: 1,2 sec

### Flicker indices according to Illuminating Engineering Society (IES)

Flicker frequency: 98,52 Hz  
 Percent Flicker: 0,22 %  
 Flicker index: 0

### Flicker indices according to California Energy Commission (CEC) 2016b

JA8/10 40 Hz: 0,02 %  
 JA8/10 90 Hz: 0,02 %  
 JA8/10 200 Hz: 0,2 %  
 JA8/10 400 Hz: 0,21 %  
 JA8/10 1000 Hz: 0,21 %


### TLA indices (re IEC TR 61547-1, IEC 61000-3-3 and IEC 61000-4-15)

PstLM value (F < 80 Hz): 0,01  
 SVM value (80 < F < 2000 Hz): 0,01

### Flicker indices according to Lighting Research Center (2015)

Perception metric, Assist Mp: 0,01

### Flicker frame (frame of one flicker period in time domain)

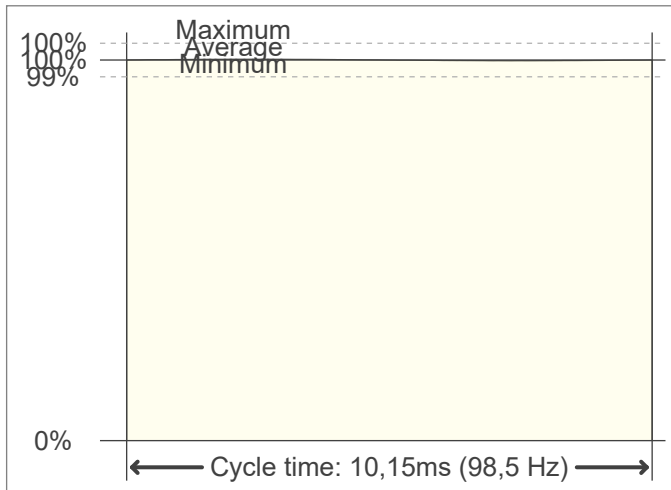

### Flicker FFT (flicker curve in frequency domain)



### IEEE 1789 Frequency/modulation plot

